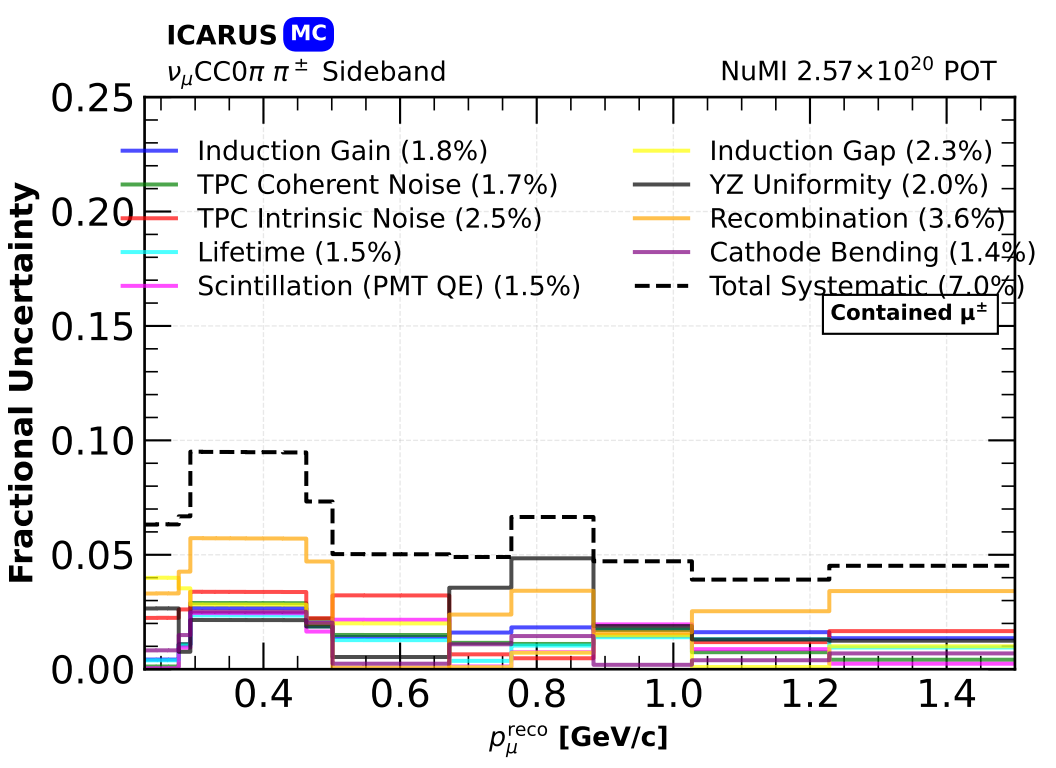
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (1.8%)
TPC Coherent Noise (1.7%)
TPC Intrinsic Noise (2.5%)
Lifetime (1.5%)
Scintillation (PMT QE) (1.5%)
Induction Gap (2.3%)
YZ Uniformity (2.0%)
Recombination (3.6%)
Cathode Bending (1.4%)
Total Systematic (7.0%)
Contained μ$^\pm$
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0.4
0.6
0.8
1.0
1.2
1.4
p_μ^{reco} [GeV/c]