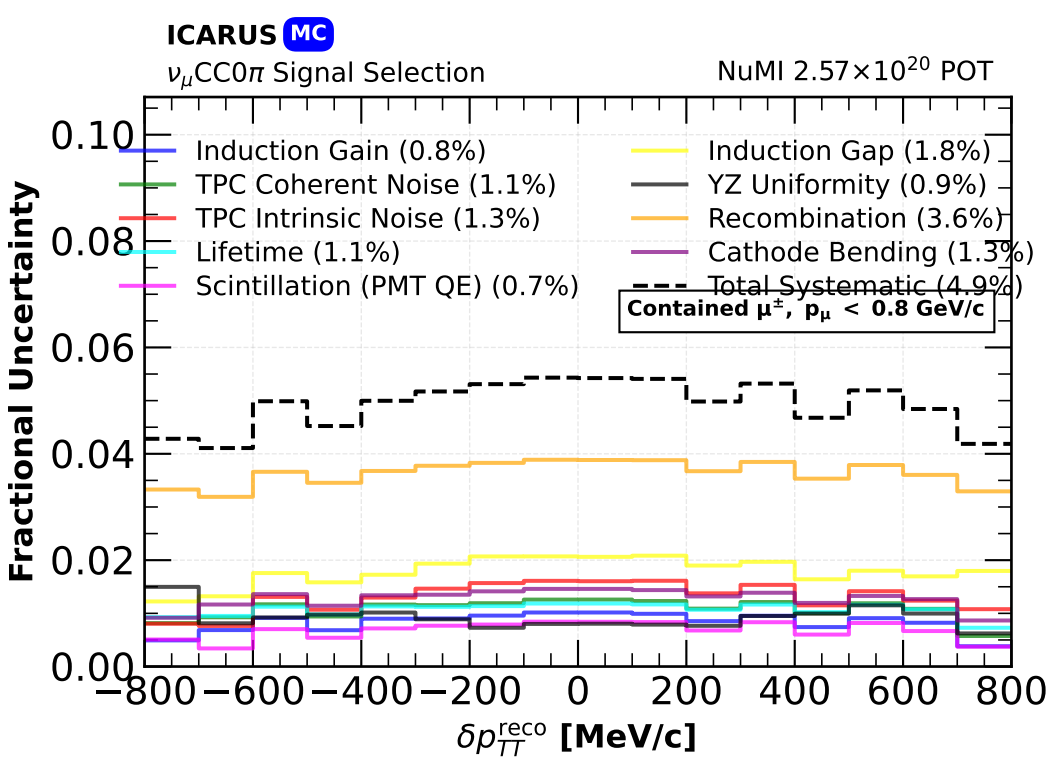
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (0.8%)
TPC Coherent Noise (1.1%)
TPC Intrinsic Noise (1.3%)
Lifetime (1.1%)
Scintillation (PMT QE) (0.7%)
Induction Gap (1.8%)
YZ Uniformity (0.9%)
Recombination (3.6%)
Cathode Bending (1.3%)
Total Systematic (4.9%)
Contained μ±, pμ < 0.8 GeV/c
Fractional Uncertainty
0.10
0.08
0.06
0.04
0.02
0.00
−800
−600
−400
−200
0
200
400
600
800
$\delta p_{TT}^{\text{reco}}$ [MeV/c]