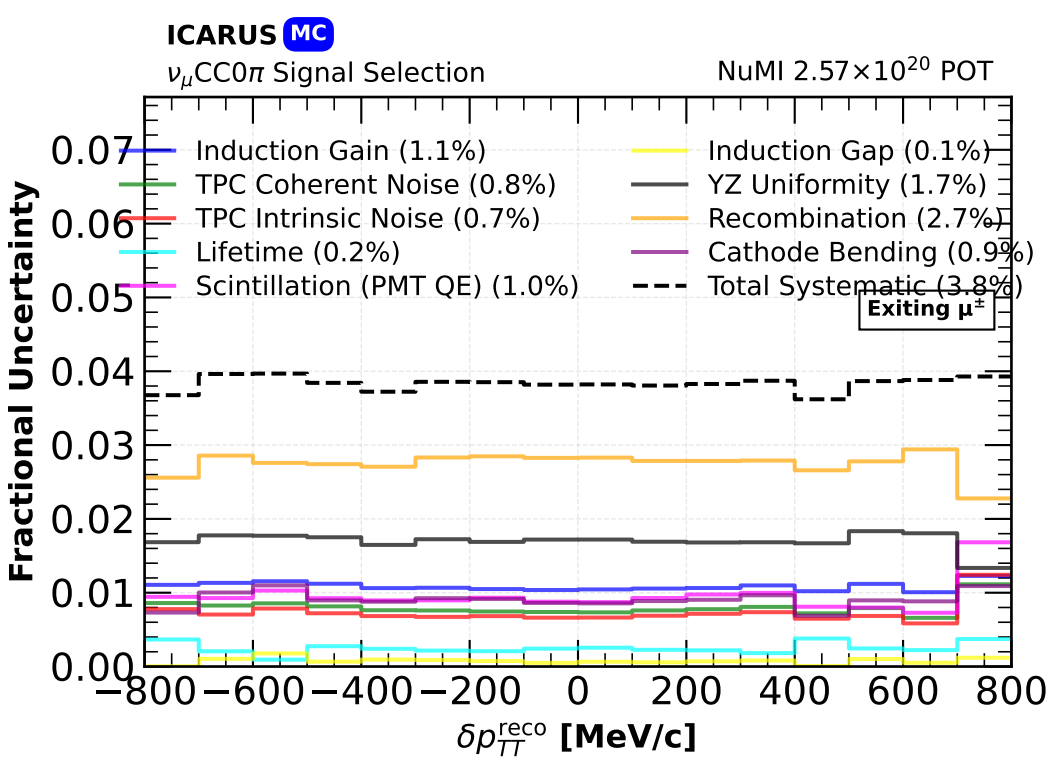
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (1.1%)
TPC Coherent Noise (0.8%)
TPC Intrinsic Noise (0.7%)
Lifetime (0.2%)
Scintillation (PMT QE) (1.0%)
Induction Gap (0.1%)
YZ Uniformity (1.7%)
Recombination (2.7%)
Cathode Bending (0.9%)
Total Systematic (3.8%)
Exiting μ±
Fractional Uncertainty
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
−800
−600
−400
−200
0
200
400
600
800
$\delta p_{TT}^{\text{reco}}$ [MeV/c]