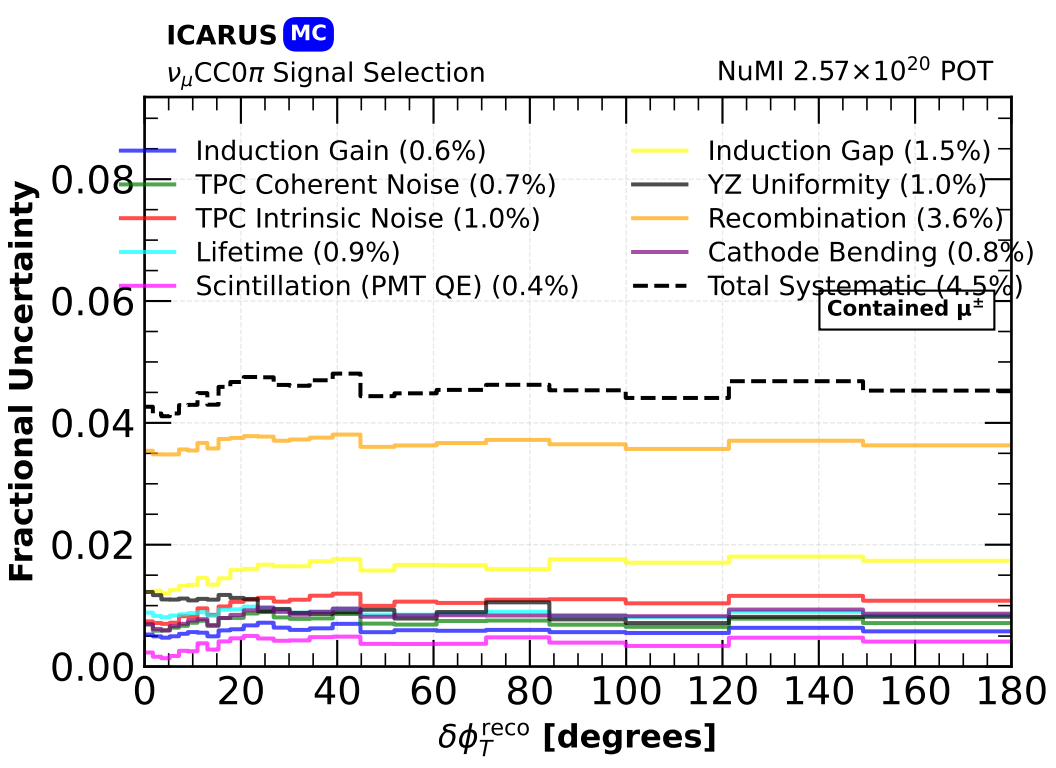
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (0.6%)
TPC Coherent Noise (0.7%)
TPC Intrinsic Noise (1.0%)
Lifetime (0.9%)
Scintillation (PMT QE) (0.4%)
Induction Gap (1.5%)
YZ Uniformity (1.0%)
Recombination (3.6%)
Cathode Bending (0.8%)
Total Systematic (4.5%)
Contained μ±
Fractional Uncertainty
0.00
0.02
0.04
0.06
0.08
0
20
40
60
80
100
120
140
160
180
$\delta\phi_T^{\text{reco}}$ [degrees]