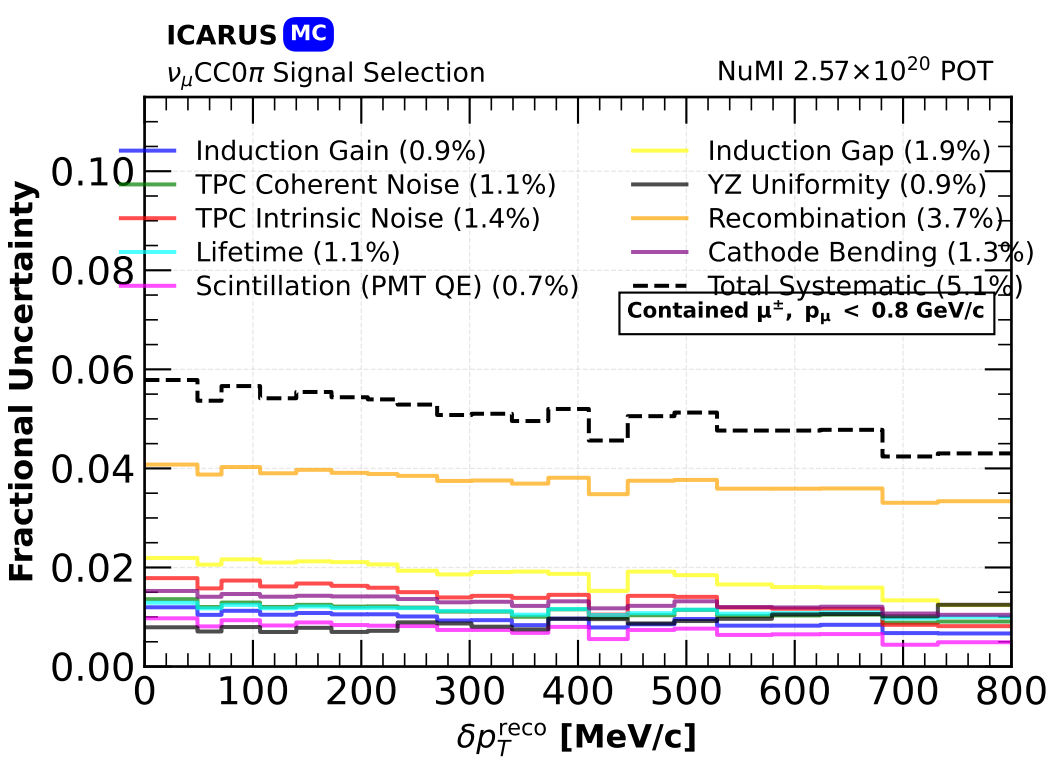
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (0.9%)
TPC Coherent Noise (1.1%)
TPC Intrinsic Noise (1.4%)
Lifetime (1.1%)
Scintillation (PMT QE) (0.7%)
Induction Gap (1.9%)
YZ Uniformity (0.9%)
Recombination (3.7%)
Cathode Bending (1.3%)
Total Systematic (5.1%)
Contained μ±, pμ < 0.8 GeV/c
Fractional Uncertainty
0.00
0.02
0.04
0.06
0.08
0.10
0
100
200
300
400
500
600
700
800
δp_T^{reco} [MeV/c]