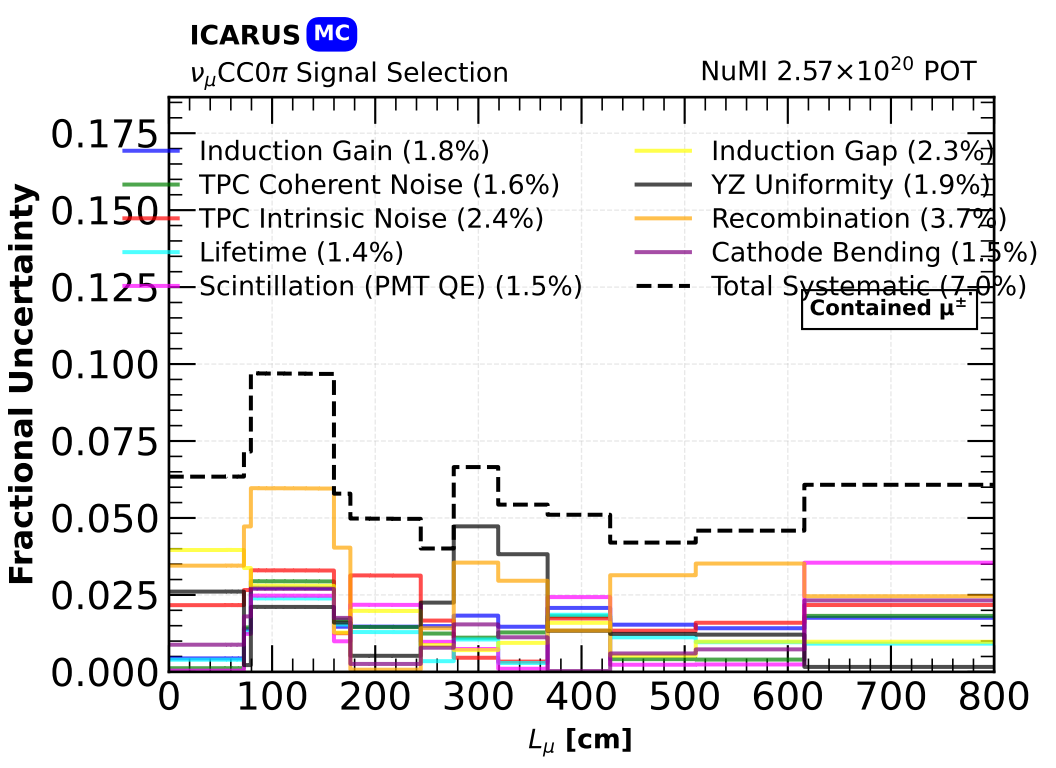
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (1.8%)
TPC Coherent Noise (1.6%)
TPC Intrinsic Noise (2.4%)
Lifetime (1.4%)
Scintillation (PMT QE) (1.5%)
Induction Gap (2.3%)
YZ Uniformity (1.9%)
Recombination (3.7%)
Cathode Bending (1.5%)
Total Systematic (7.0%)
Contained μ±
Fractional Uncertainty
0.175
0.150
0.125
0.100
0.075
0.050
0.025
0.000
0
100
200
300
400
500
600
700
800
L_μ [cm]