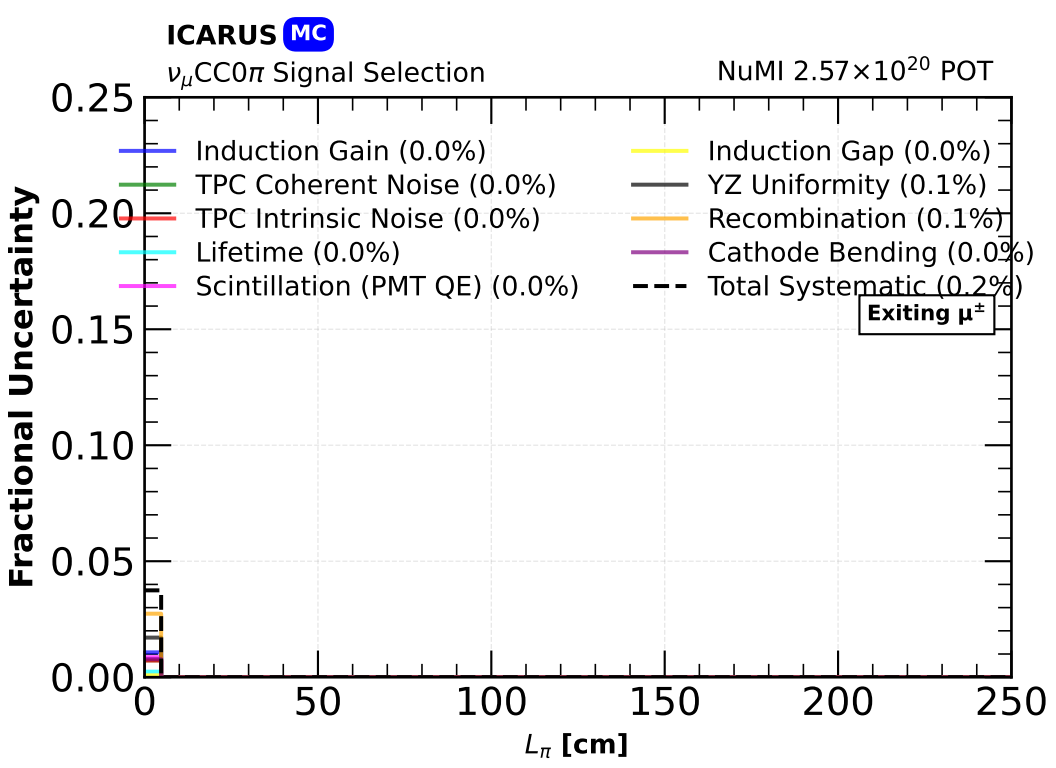
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (0.0%)
TPC Coherent Noise (0.0%)
TPC Intrinsic Noise (0.0%)
Lifetime (0.0%)
Scintillation (PMT QE) (0.0%)
Induction Gap (0.0%)
YZ Uniformity (0.1%)
Recombination (0.1%)
Cathode Bending (0.0%)
Total Systematic (0.2%)
Exiting μ±
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
50
100
150
200
250
L_π [cm]