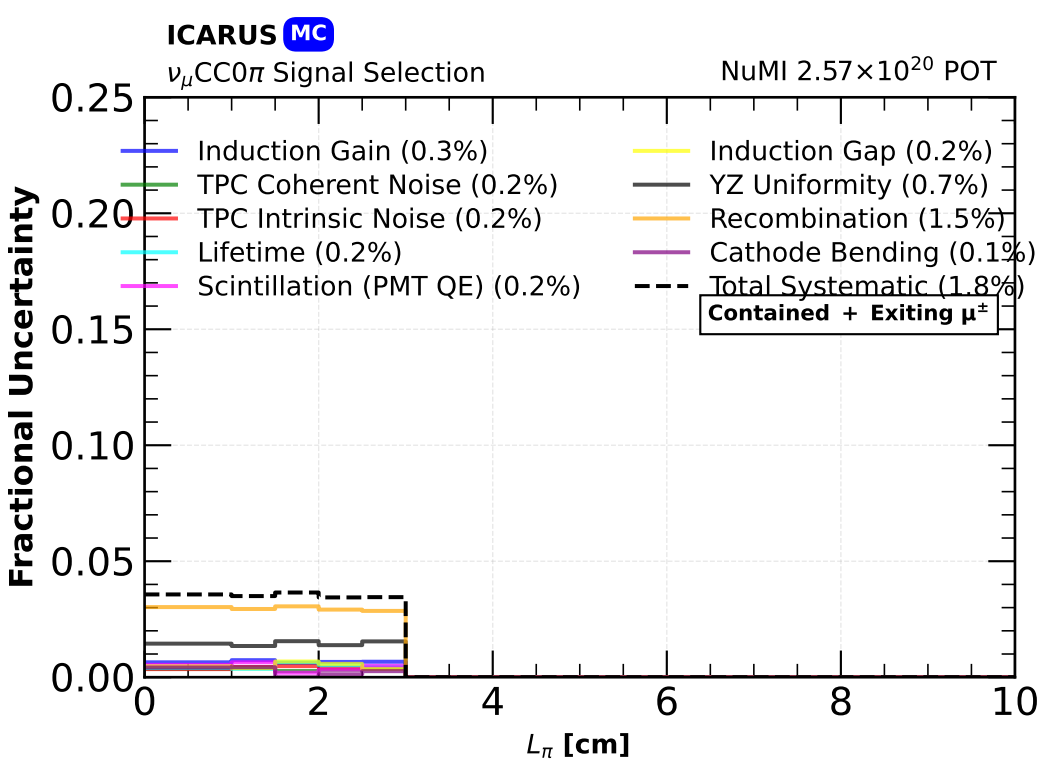
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (0.3%)
TPC Coherent Noise (0.2%)
TPC Intrinsic Noise (0.2%)
Lifetime (0.2%)
Scintillation (PMT QE) (0.2%)
Induction Gap (0.2%)
YZ Uniformity (0.7%)
Recombination (1.5%)
Cathode Bending (0.1%)
Total Systematic (1.8%)
Contained + Exiting μ±
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
2
4
6
8
10
L_π [cm]