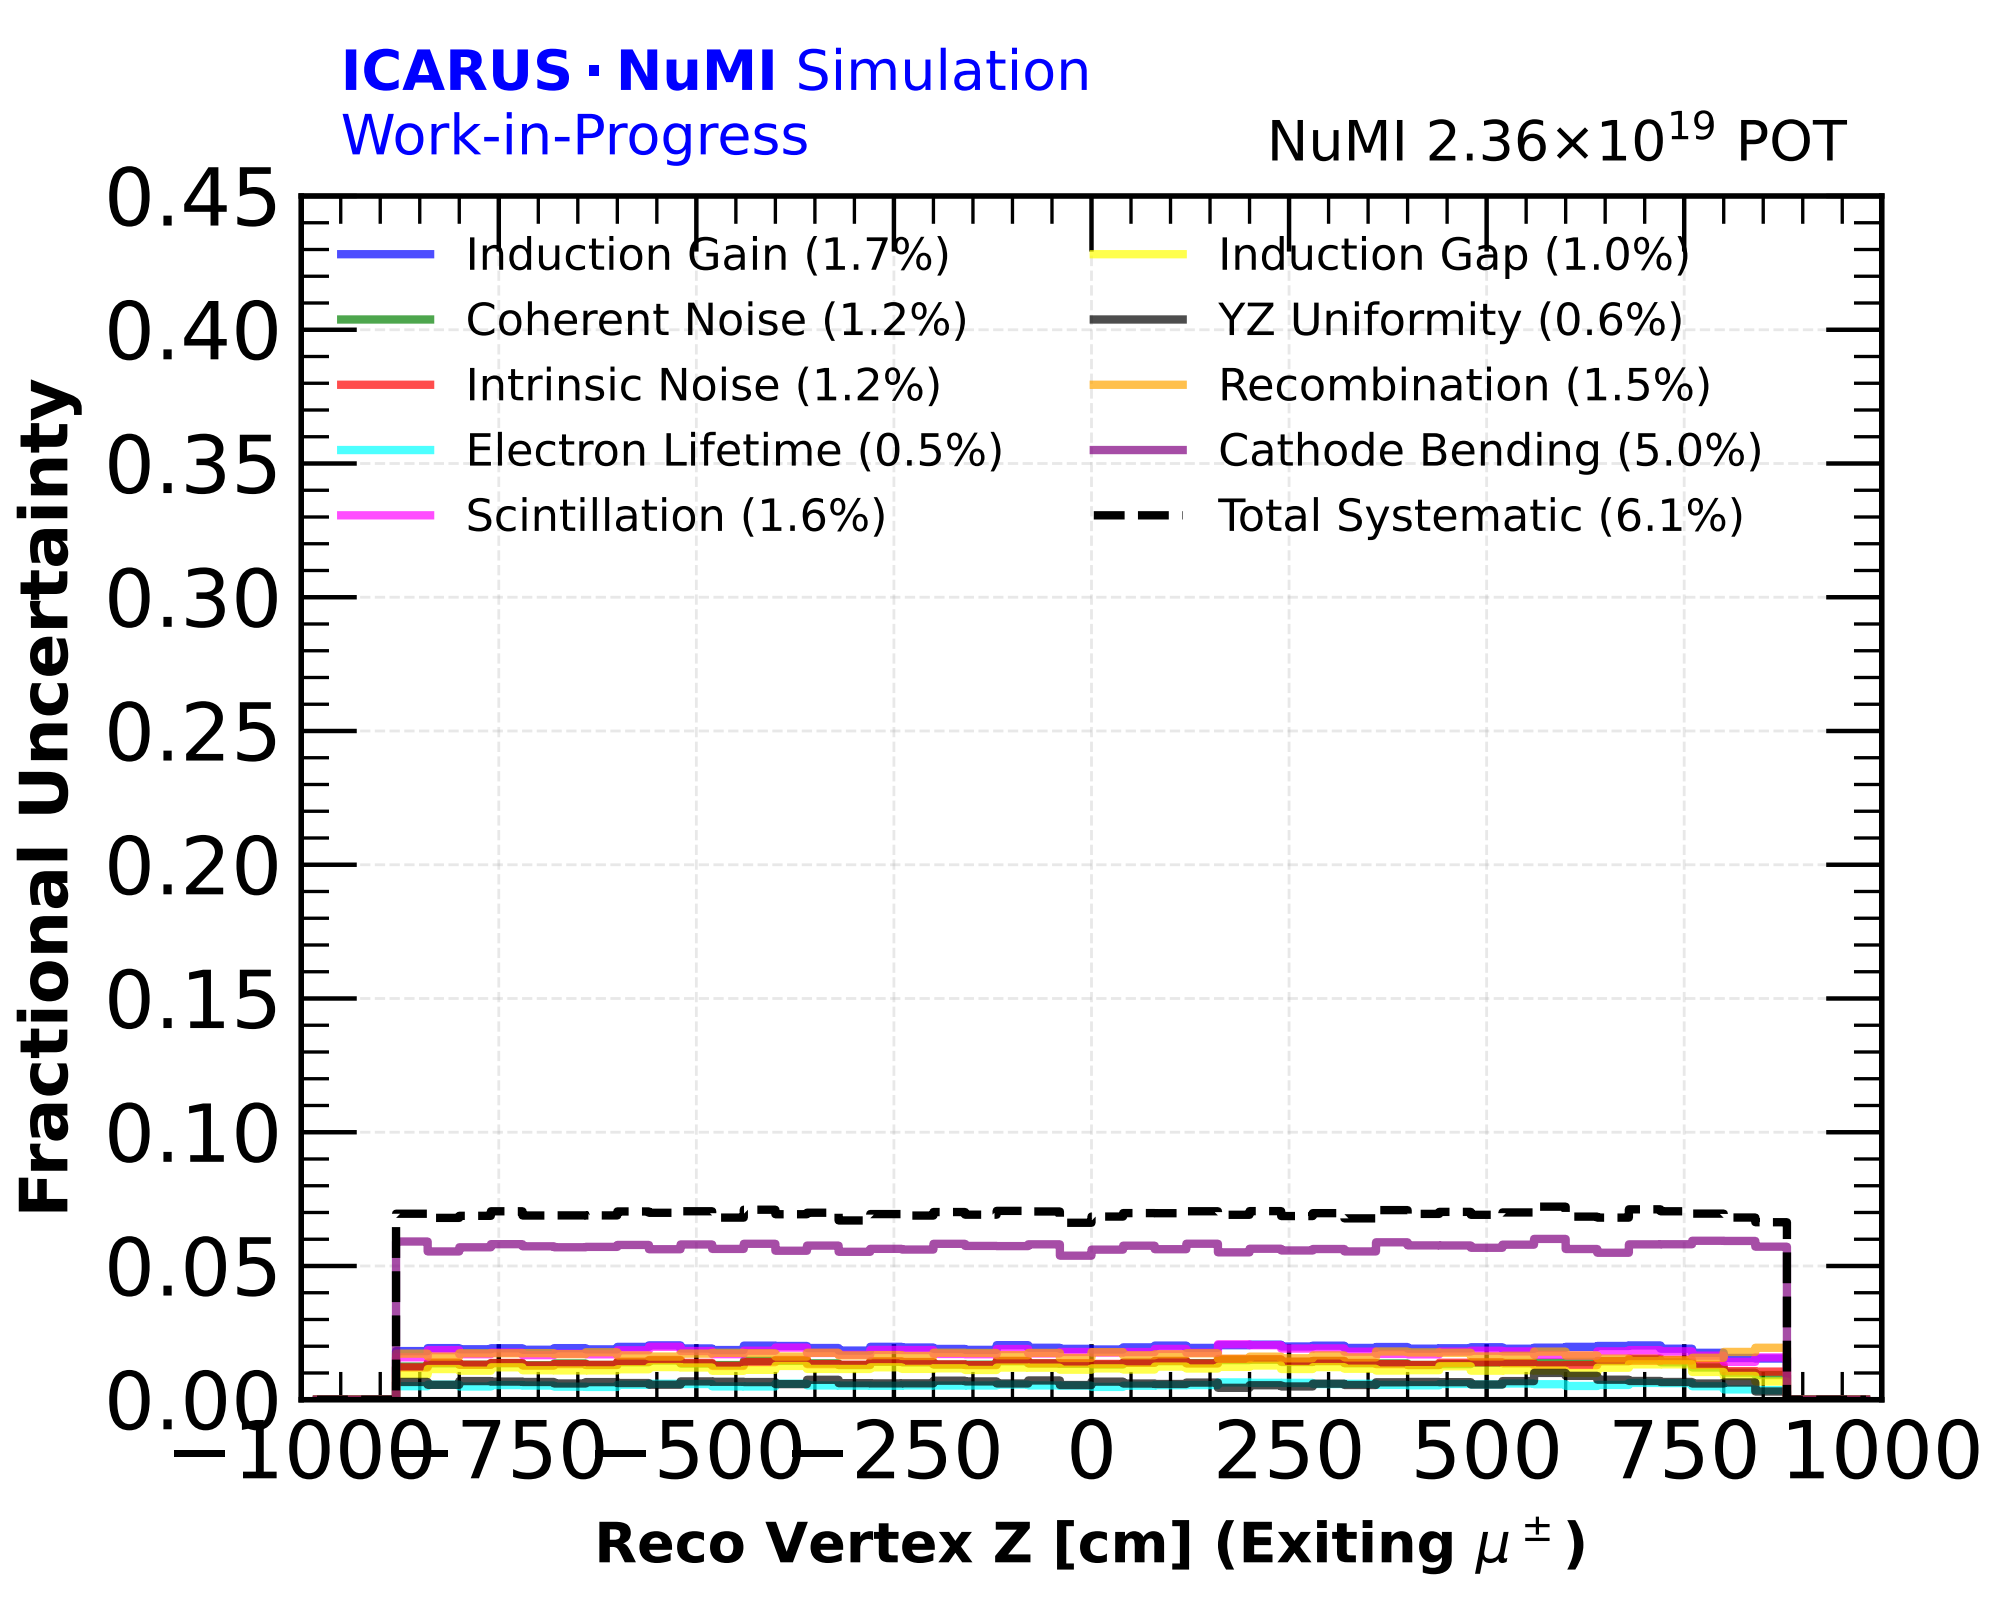
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (1.7%)
Coherent Noise (1.2%)
Intrinsic Noise (1.2%)
Electron Lifetime (0.5%)
Scintillation (1.6%)
Induction Gap (1.0%)
YZ Uniformity (0.6%)
Recombination (1.5%)
Cathode Bending (5.0%)
Total Systematic (6.1%)
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−1000
−750
−500
−250
0
250
500
750
1000
Reco Vertex Z [cm] (Exiting μ±)