


CONTROLLER + USB POWER




USER CONTROL



ROUND TFT DISPLAY



AUDIO INPUT





Use 3.3 V analog microphone module; output must remain below ADC maximum.


POWER FLAGS



5V LOGIC + REAR LED HALO

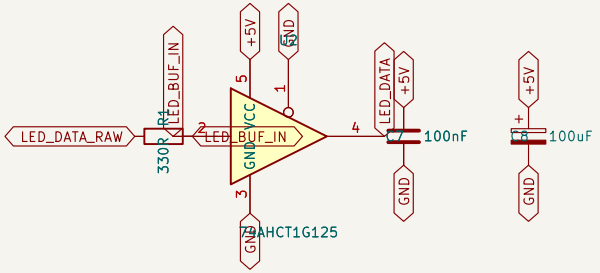

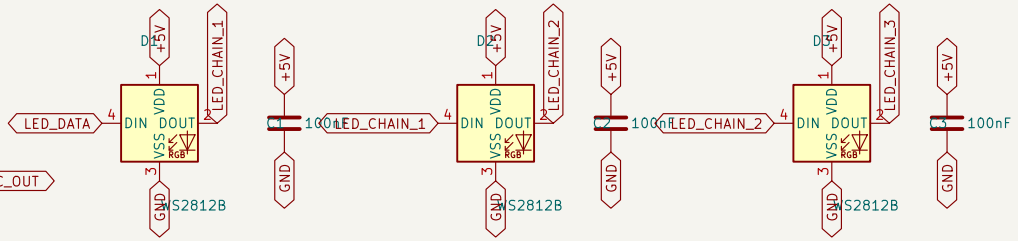

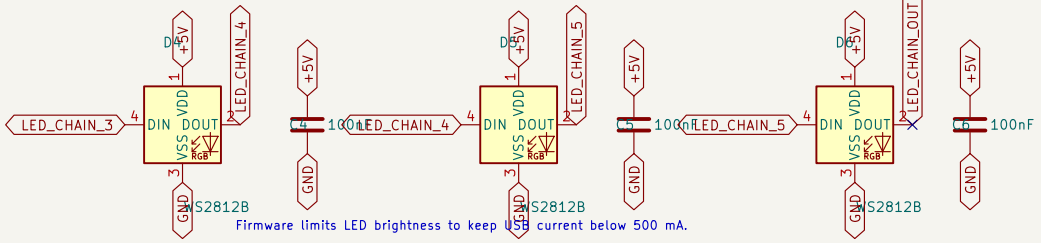

Firmware limits LED brightness to keep USB current below 500 mA.

Sheet: /		
File: Pulse−Halo.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1