



C-optimal measurement designs — $\lambda_0 = 1000$, $C = 0.4$, $\phi_g = 0.0119$ rad

$n = 3$, $\sigma = 0.0774$ rad
 $\det(\mathcal{I}^{-1}) = 6.041\text{e} + 14$

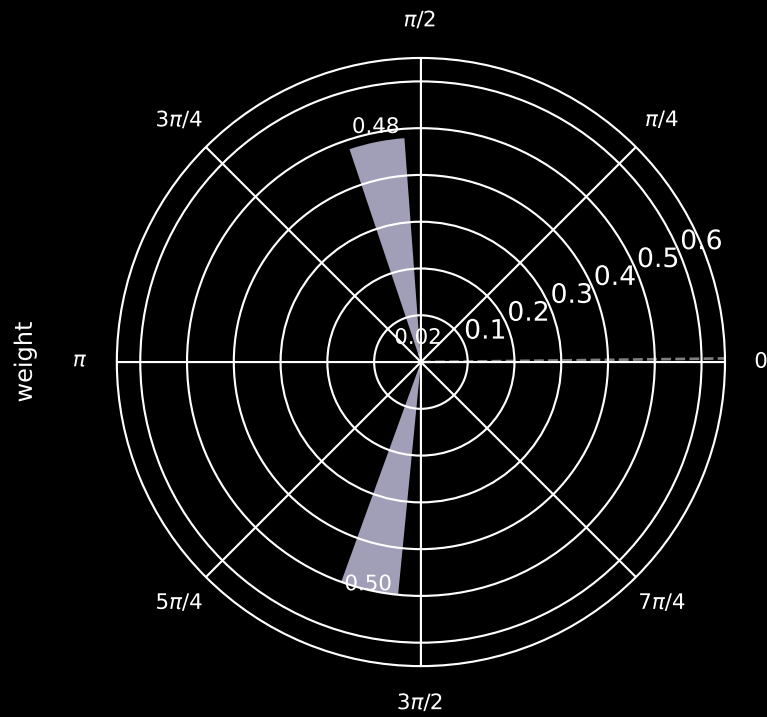

$n = 4$, $\sigma = 0.0774$ rad
 $\det(\mathcal{I}^{-1}) = 4.076\text{e} + 14$

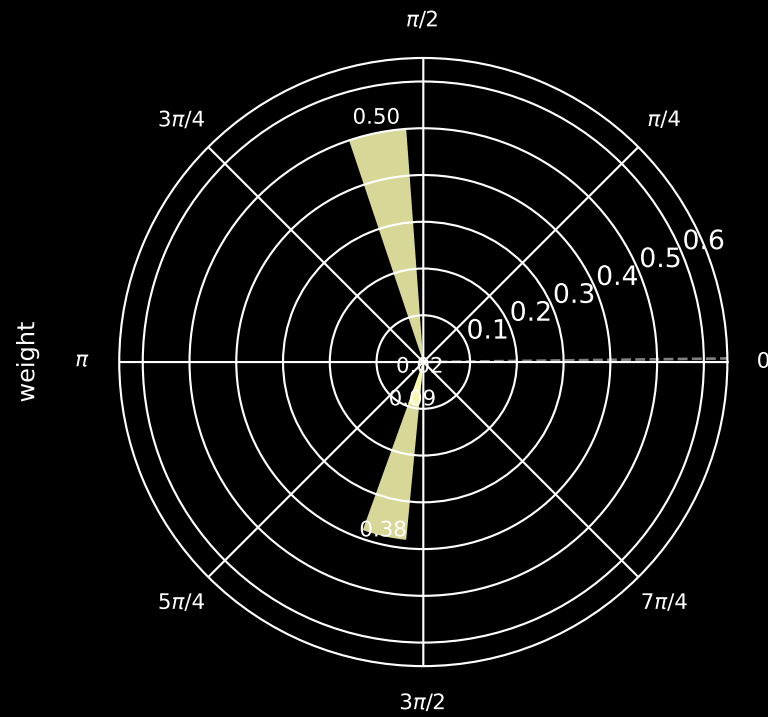

$n = 5$, $\sigma = 0.0774$ rad
 $\det(\mathcal{I}^{-1}) = 6.663\text{e} + 14$

