



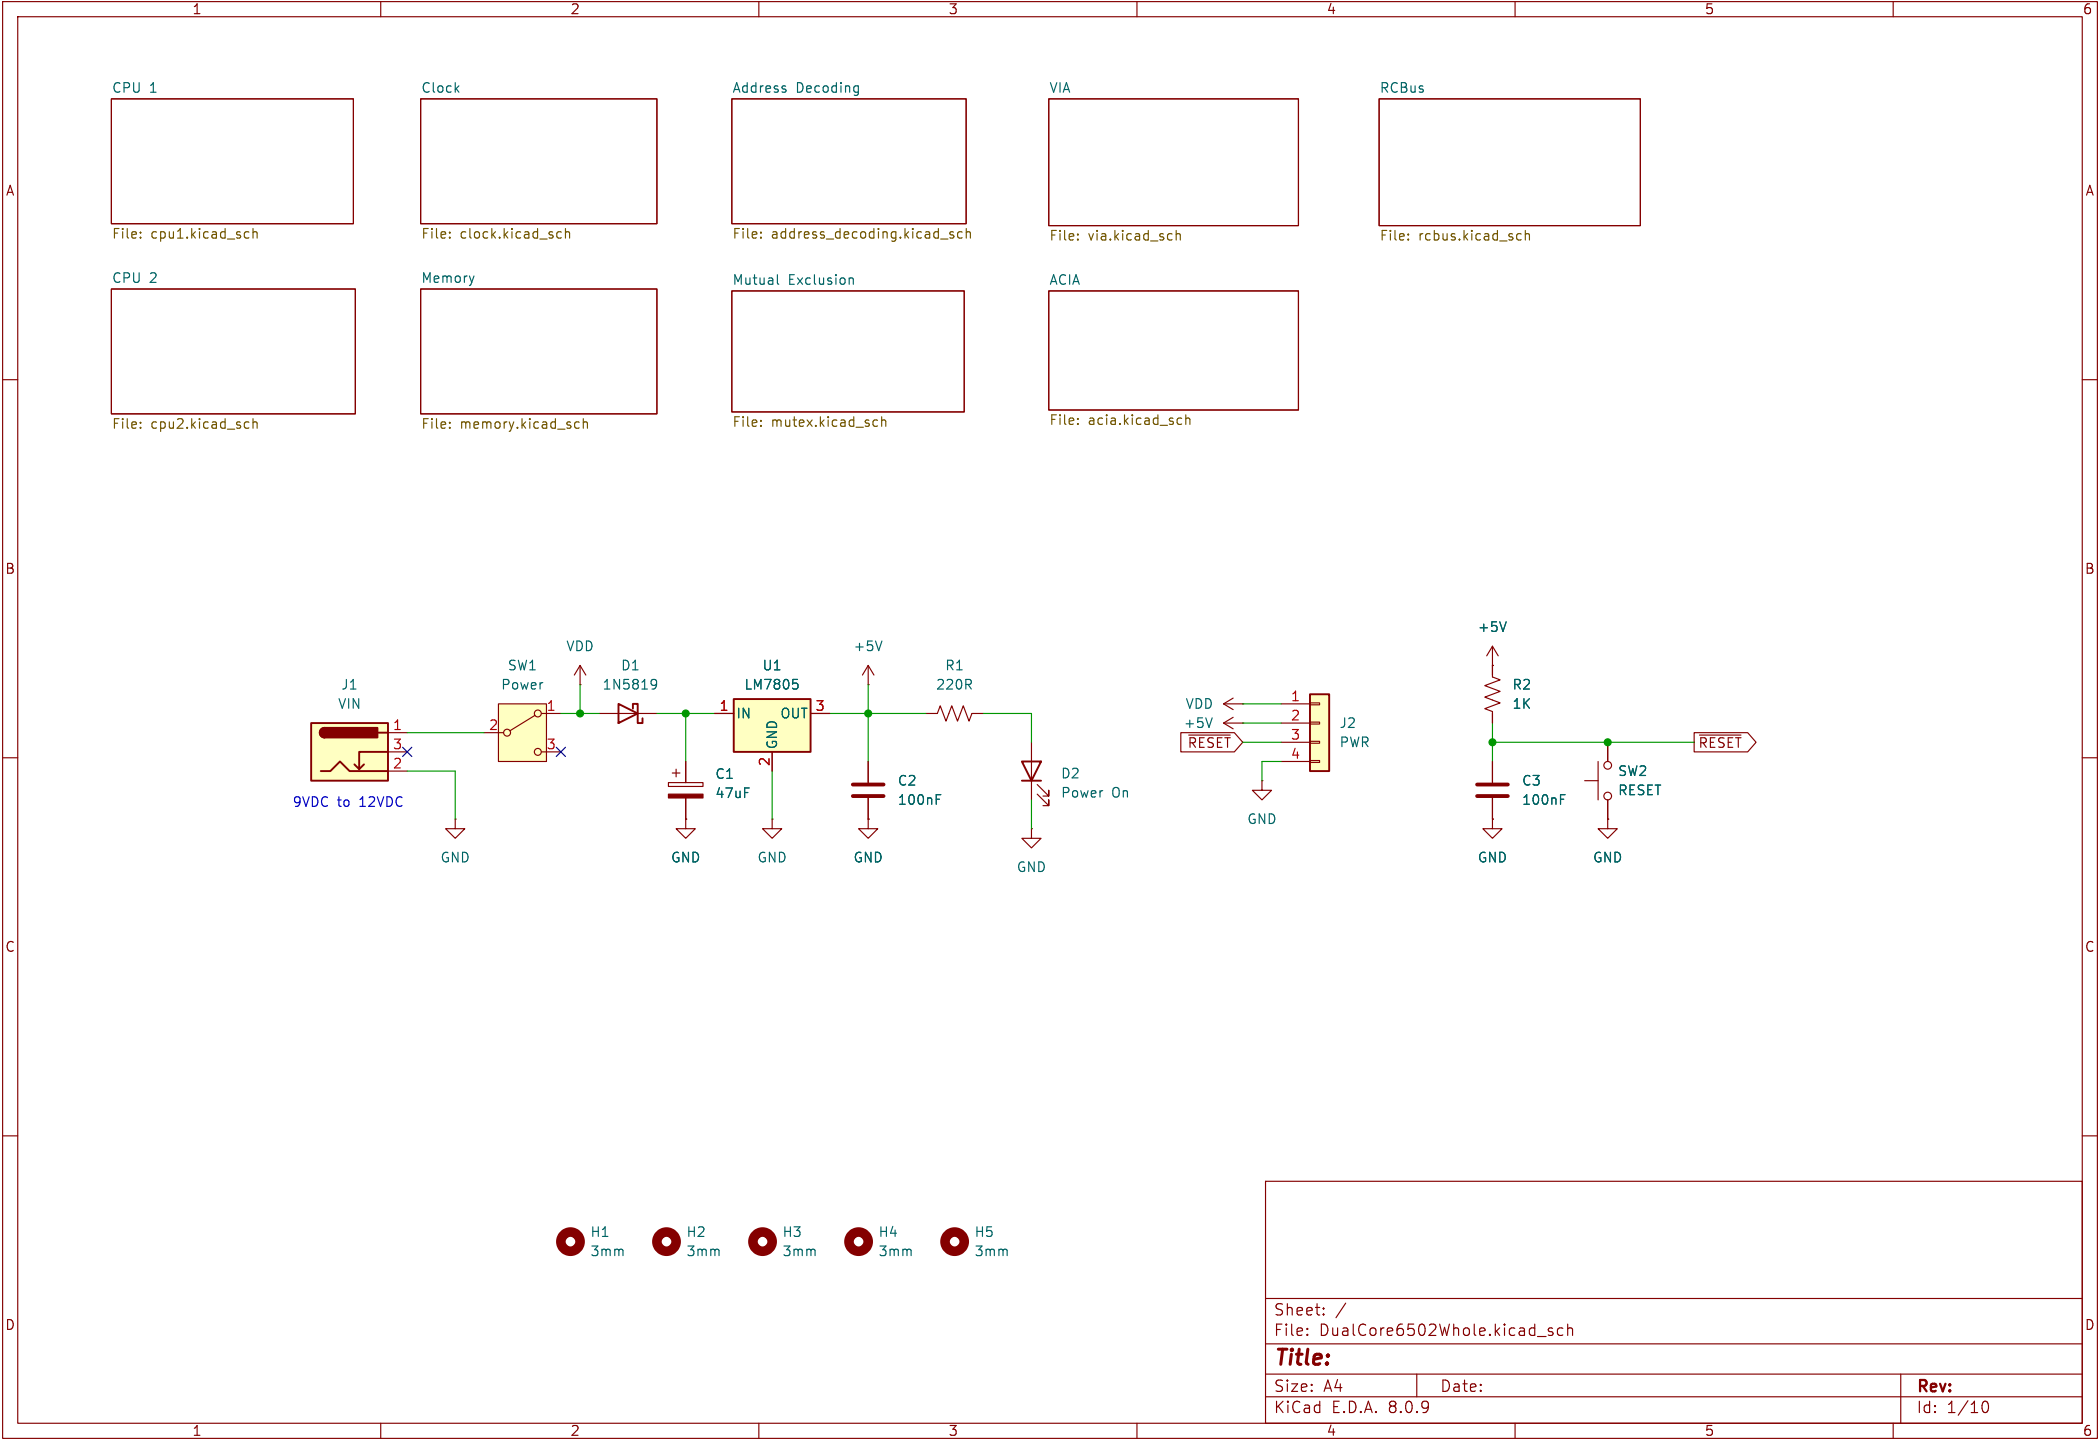

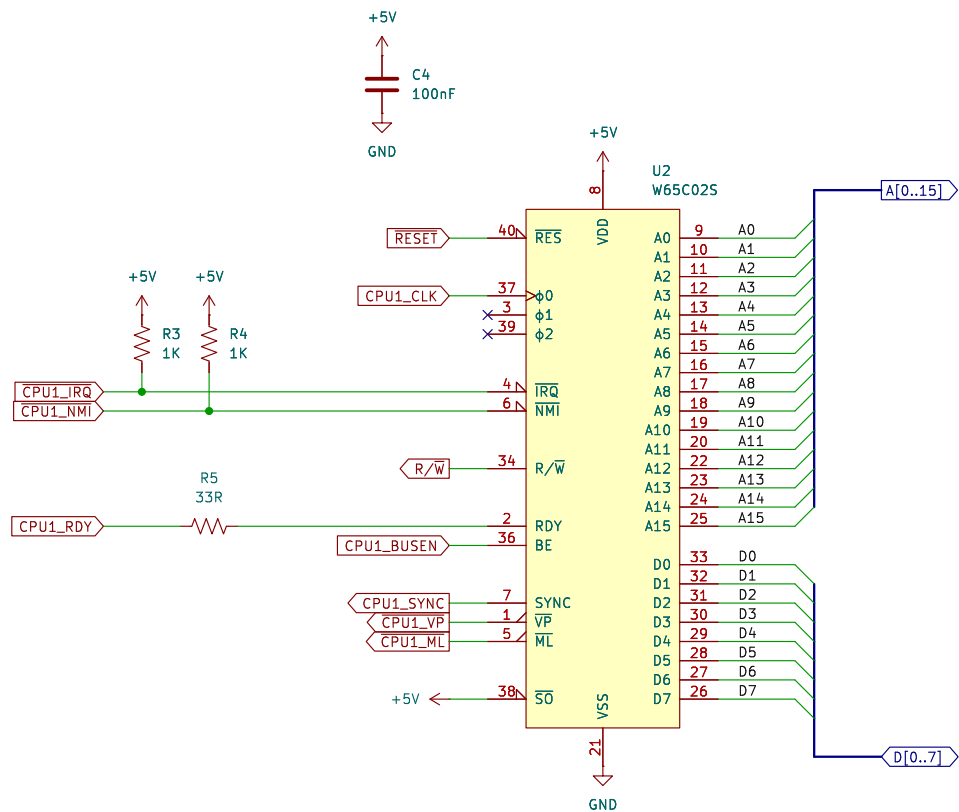

Sheet: /CPU 1/
File: cpu1.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 8.0.9

Rev:

Id: 2/10

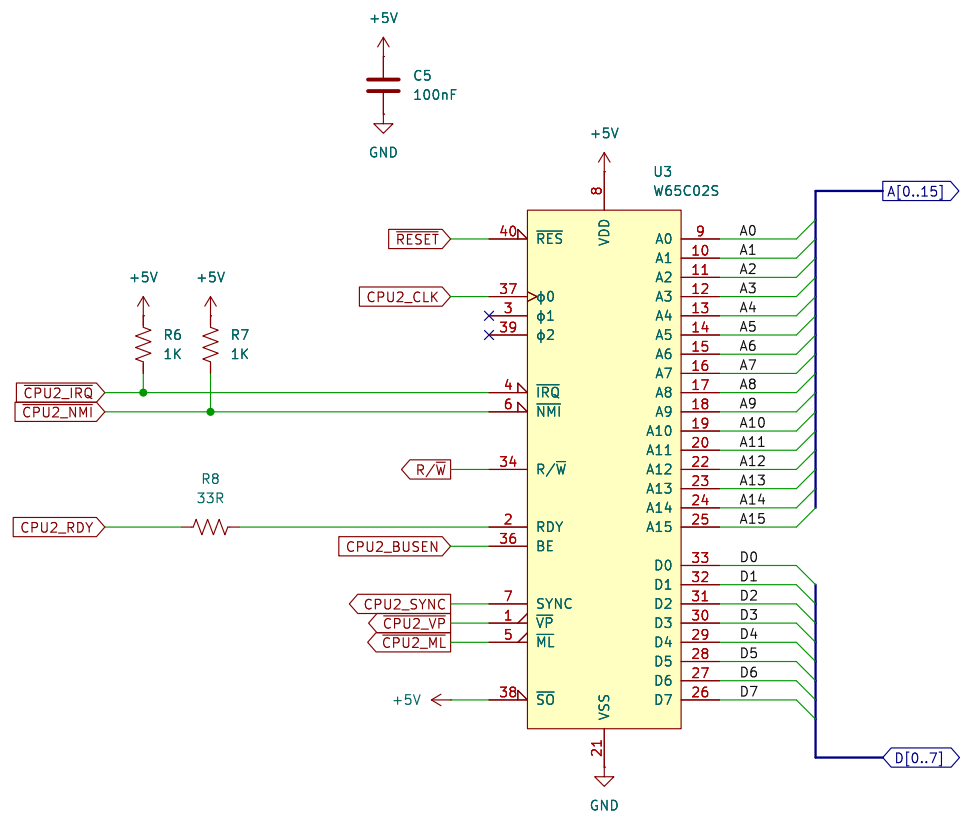

Sheet: /CPU 2/
File: cpu2.kicad_sch




Title:

Size: A4
KiCad E.D.A. 8.0.9


Date:

Rev:


Id: 3/10

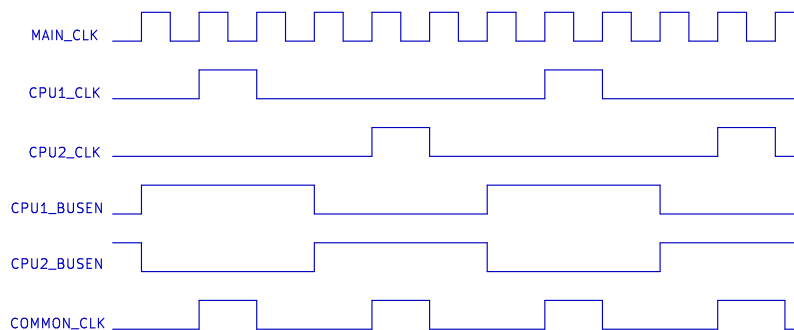
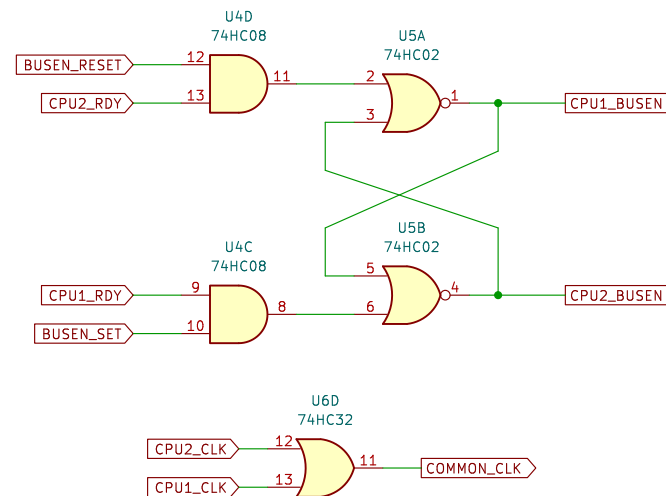


COMMON_CLK can be used to gate access to daughter chips on either clock.

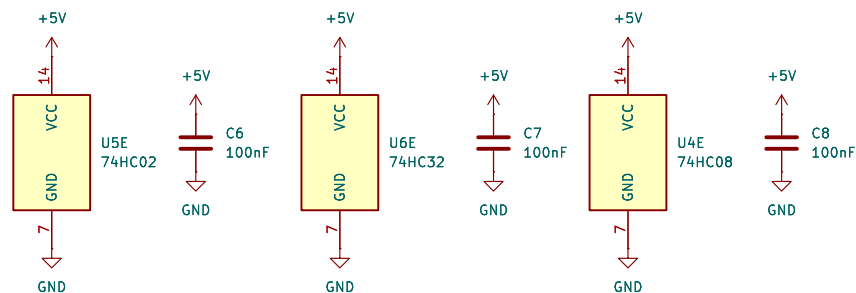

Sheet: /Clock/		
File: clock.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.9		Id: 4/10

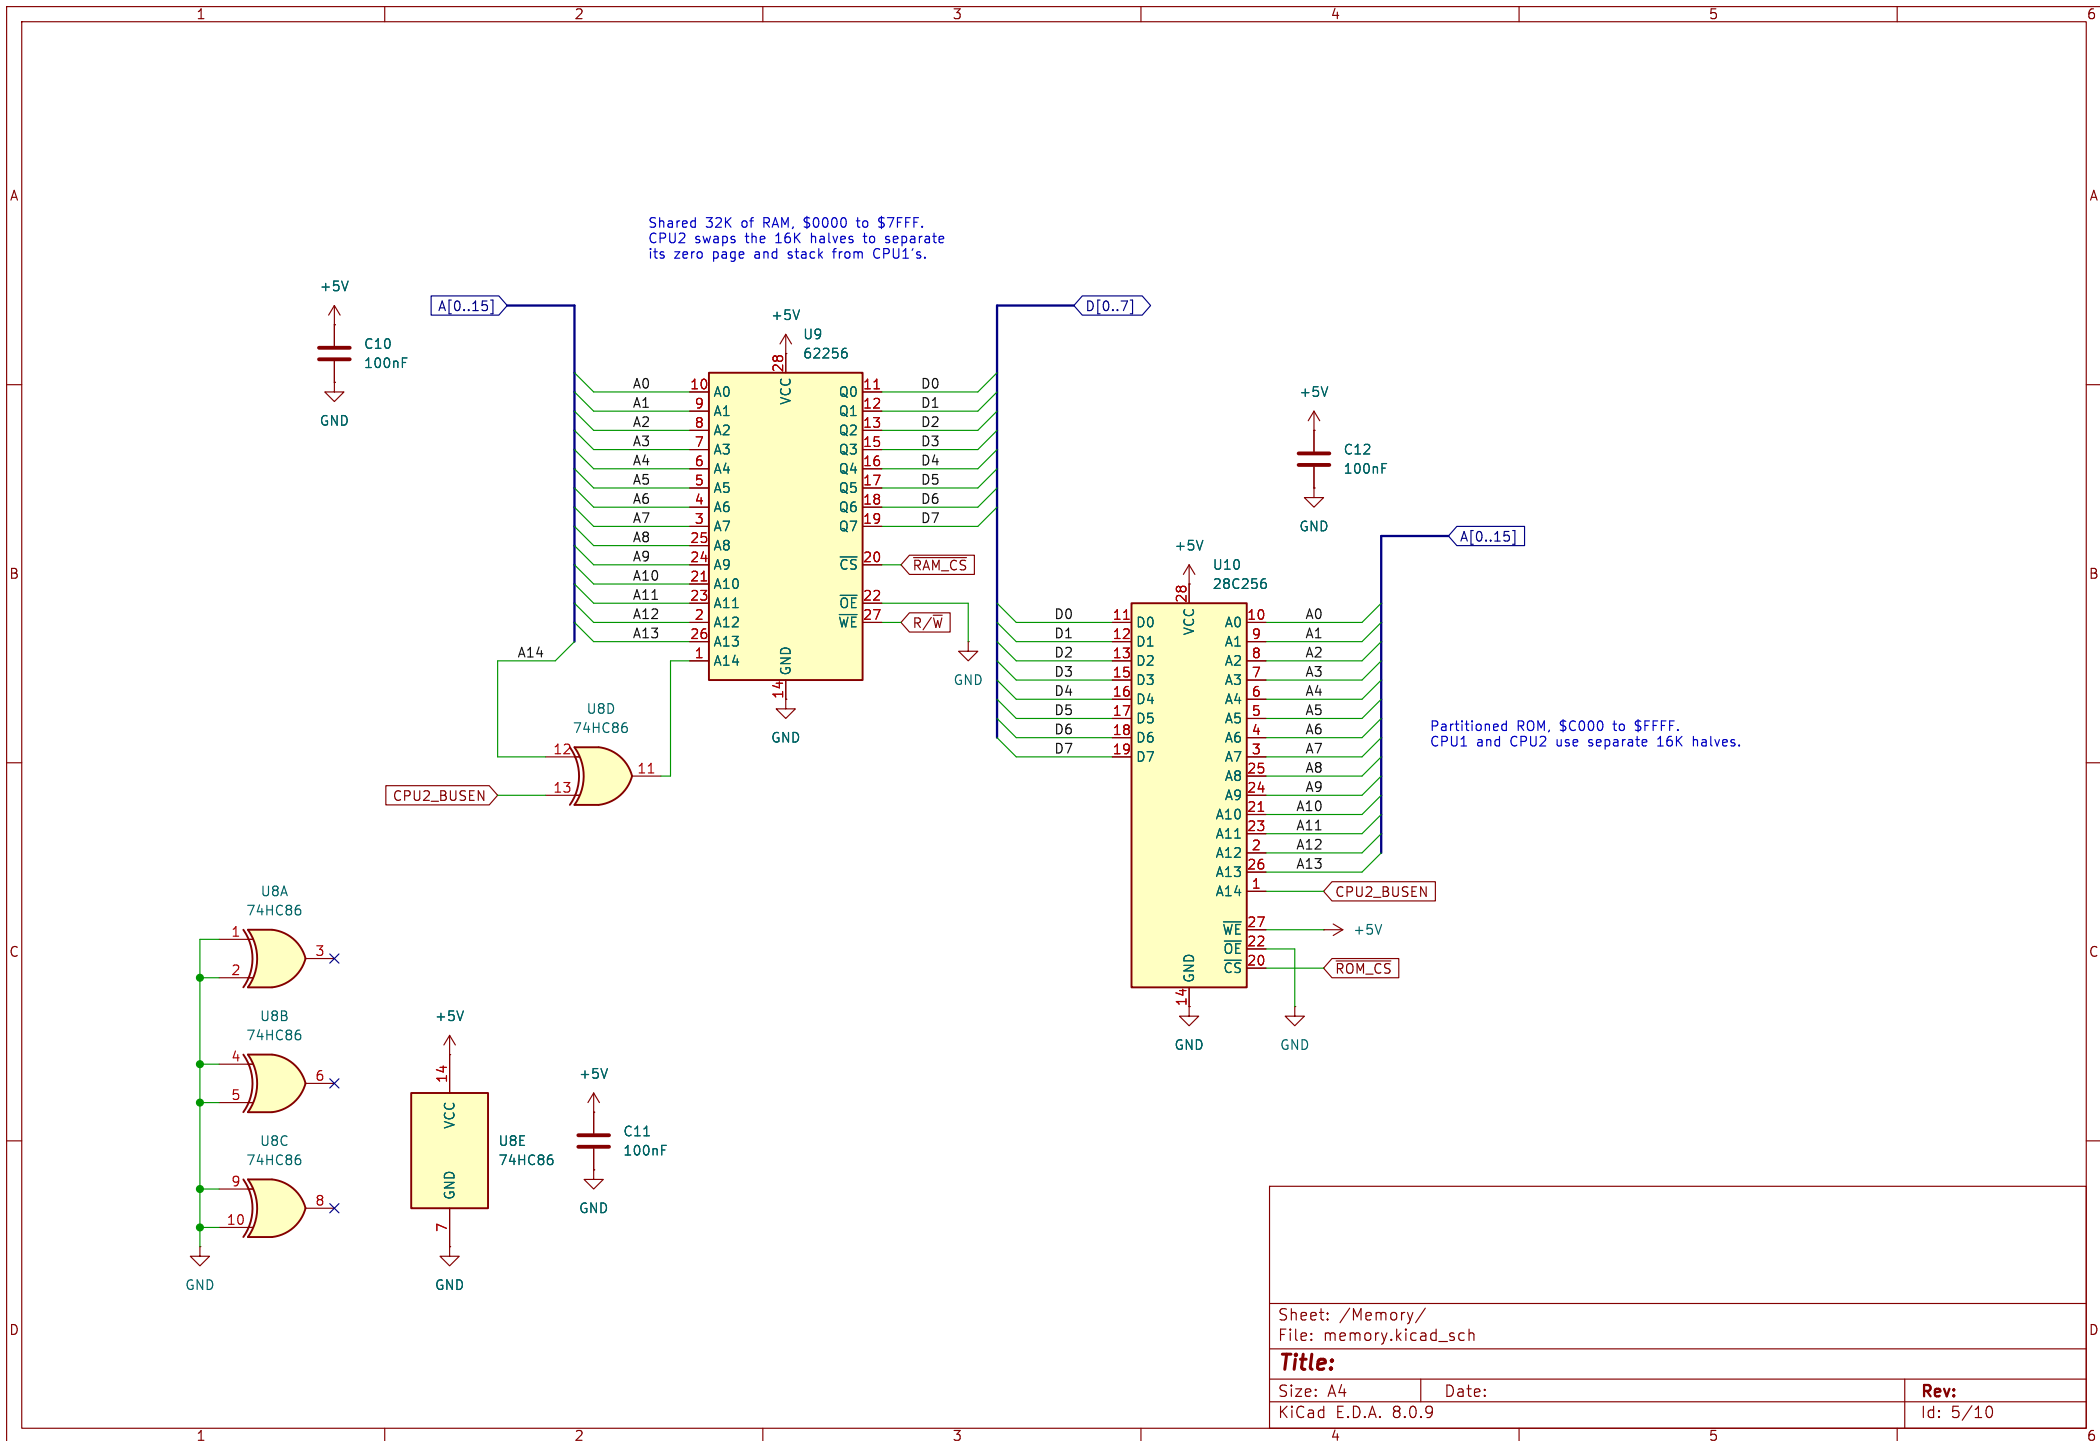

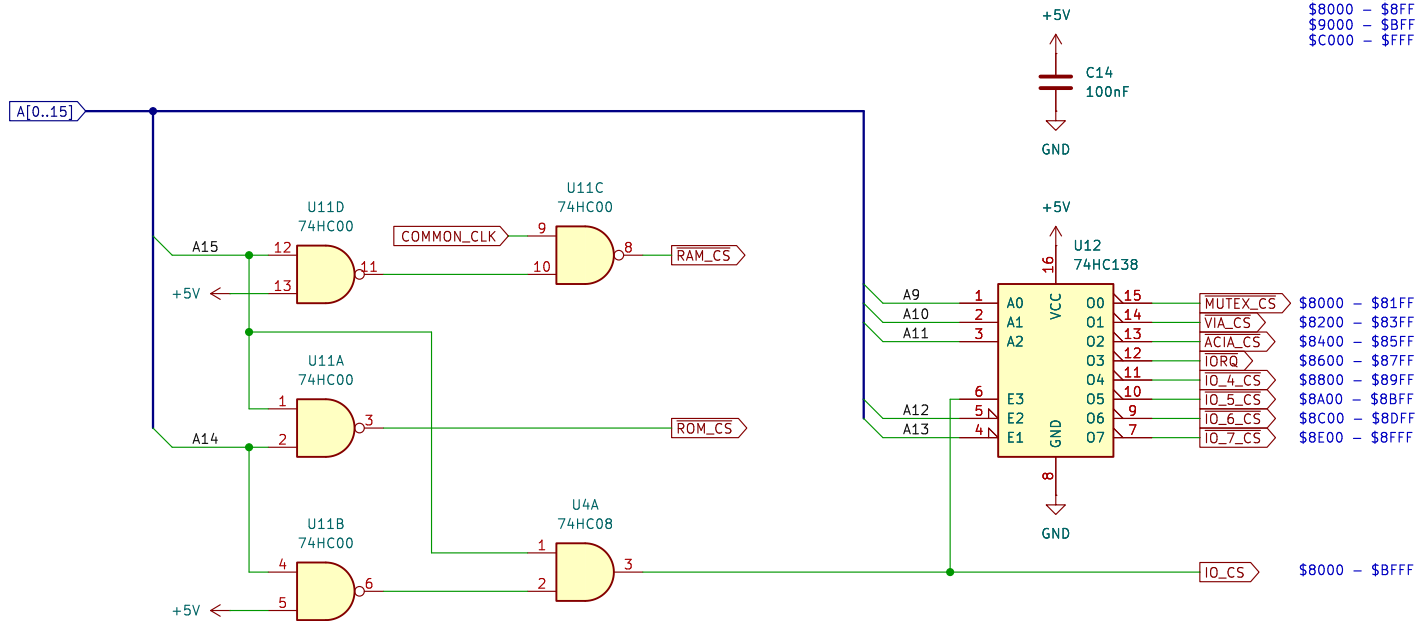

Memory Map:

\$0000 - \$3FFF	- This CPU's RAM
\$4000 - \$7FFF	- Other CPU's RAM
\$8000 - \$BFFF	- I/O Devices
\$9000 - \$BFFF	- Spare
\$C000 - \$FFFF	- This CPU's ROM

MUX_CS	\$8000 - \$81FF
VIA_CS	\$8200 - \$83FF
ACIA_CS	\$8400 - \$85FF
IORQ	\$8600 - \$87FF
IO_4_CS	\$8800 - \$89FF
IO_5_CS	\$8A00 - \$8BFF
IO_6_CS	\$8C00 - \$8DFF
IO_7_CS	\$8E00 - \$8FFF
IO_CS	\$8000 - \$BFFF

Sheet: /Address Decoding/
File: address_decoding.kicad_sch



Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.9	Id: 6/10	

```
mutex_init:
    lda $$ff
    sta $8000
    rts


mutex_lock:
    inc $8000
    beq mutex_locked
    dec $8000
    jmp mutex_lock
mutex_locked:
    rts

mutex_unlock:
    dec $8000
    rts
```



If a CPU is accessing the mutex counter for read-modify-write, disable the other CPU.

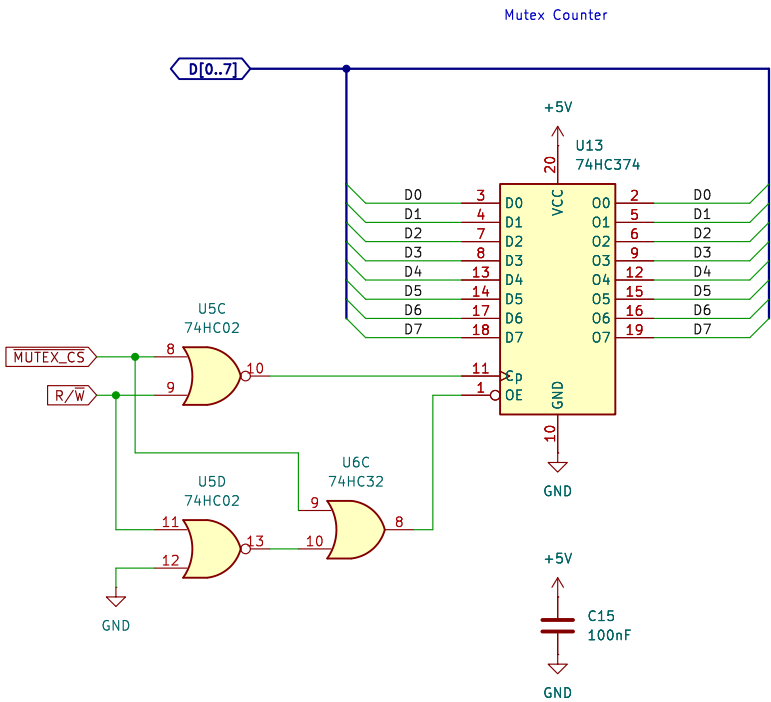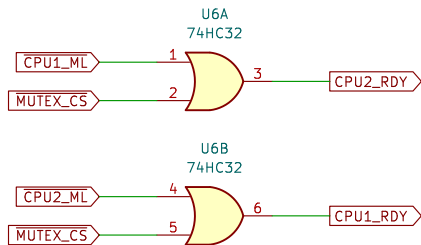



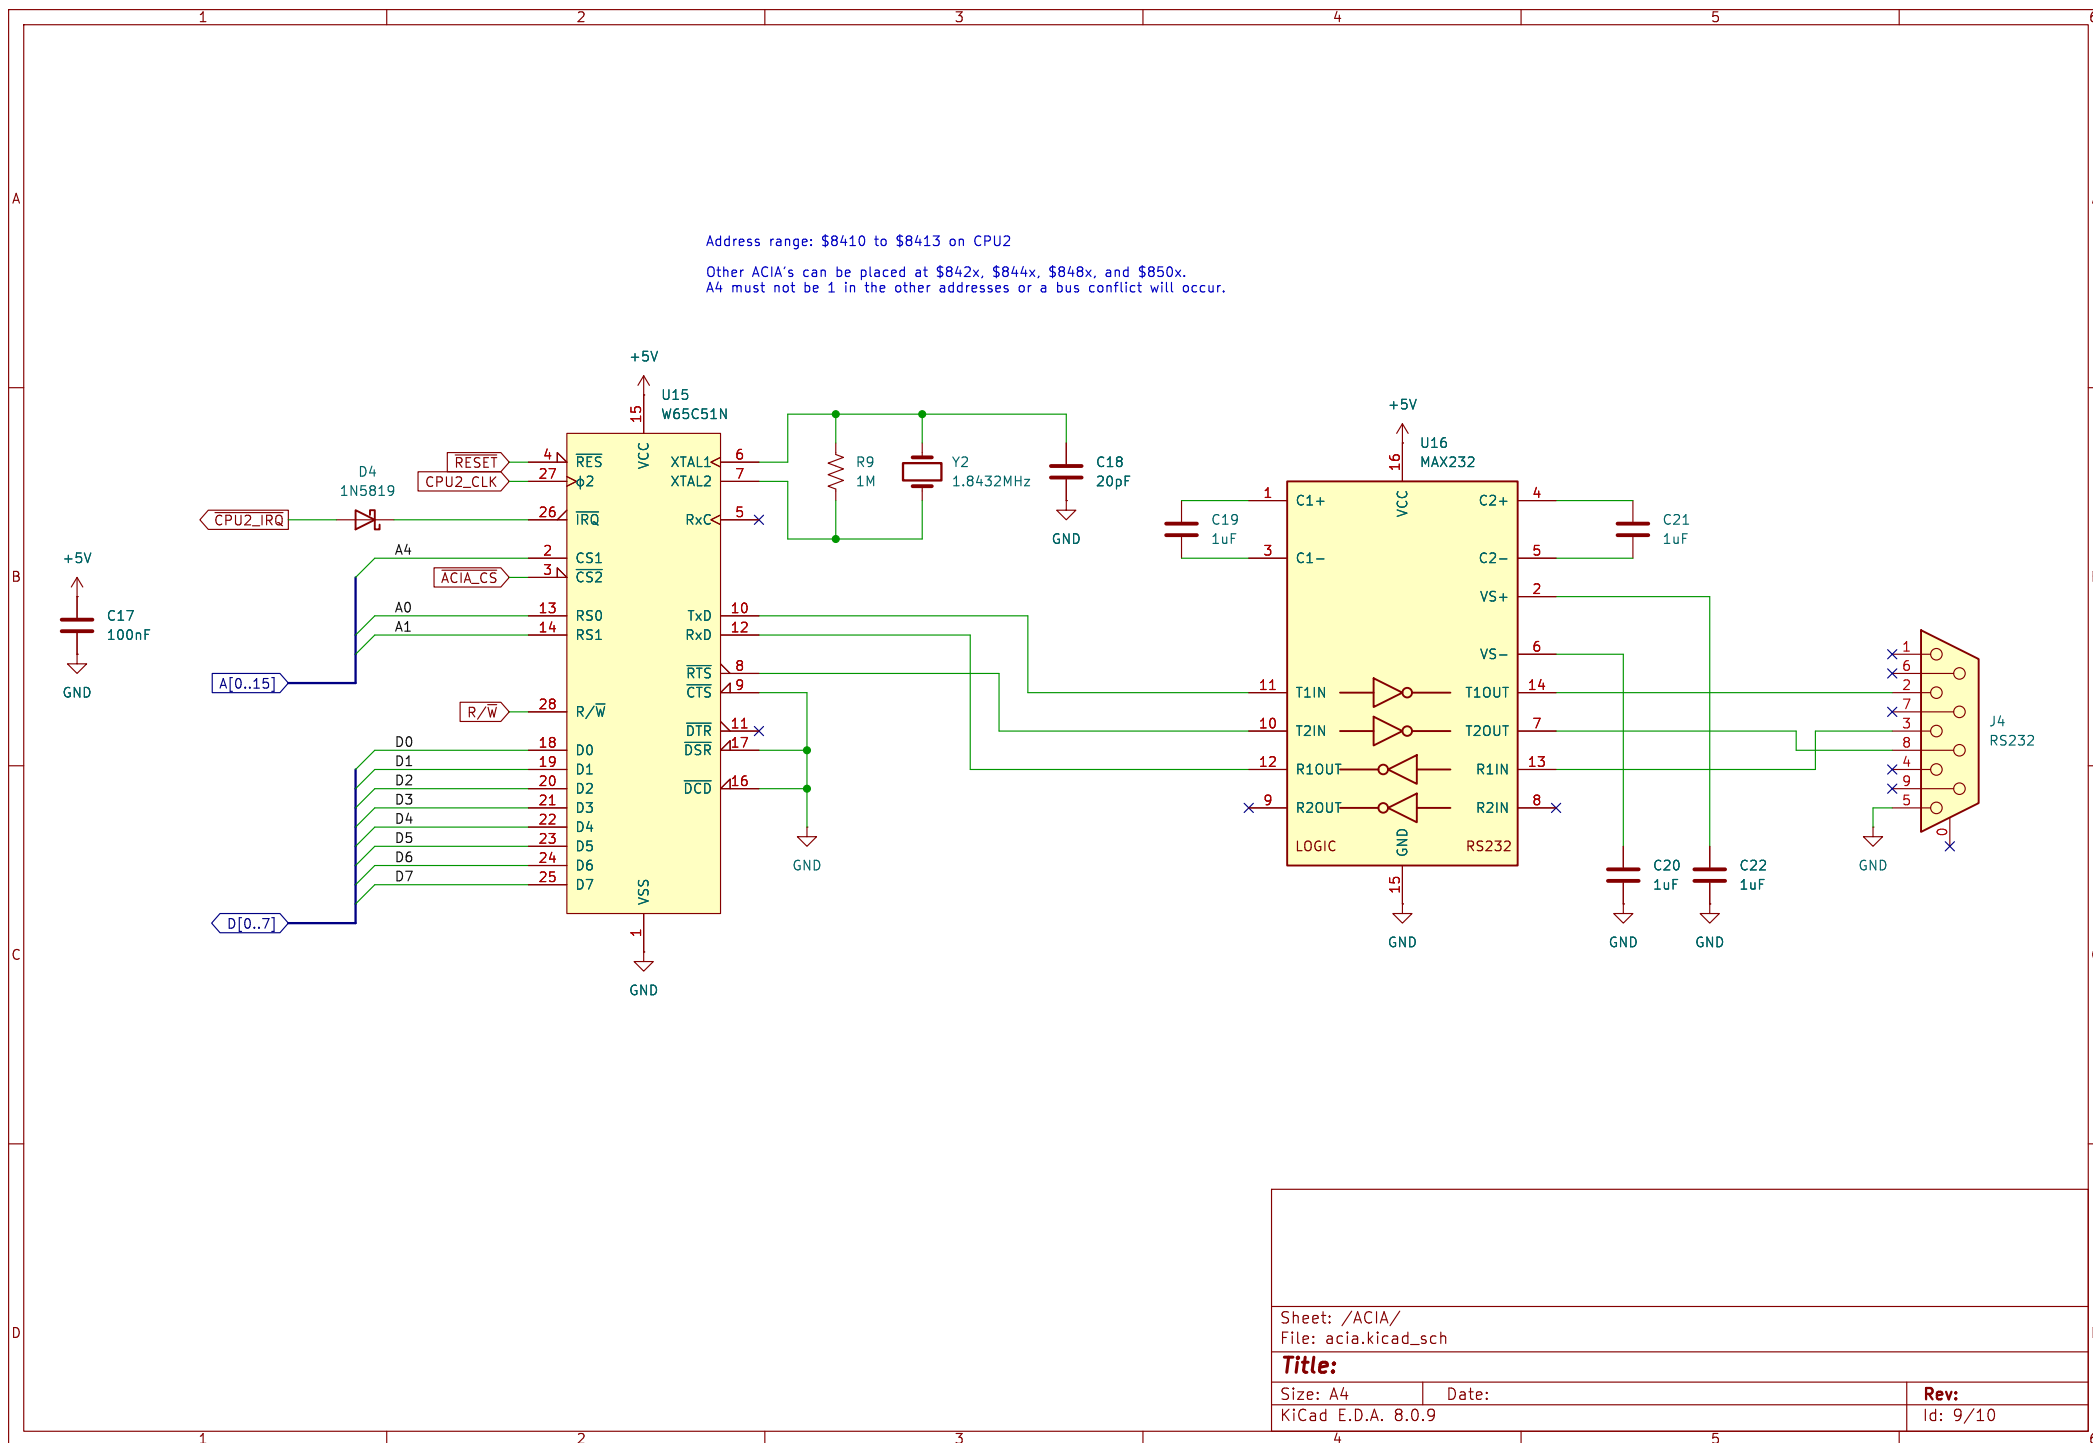

Address range \$8600 to \$86FF is used for Z80-style I/O.

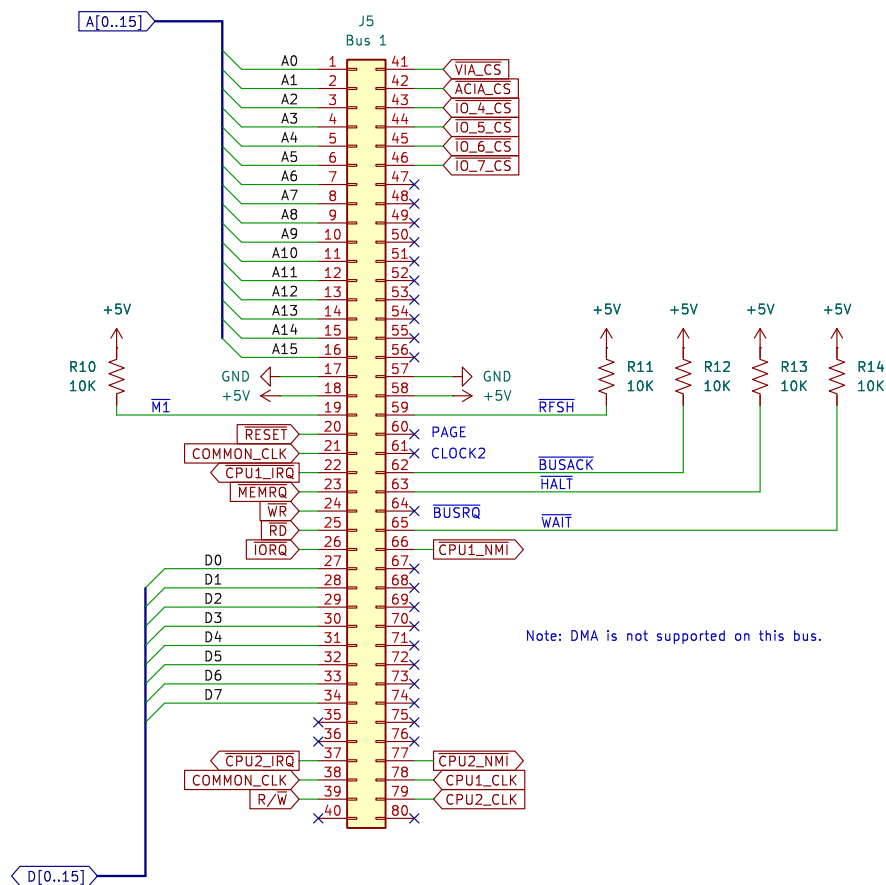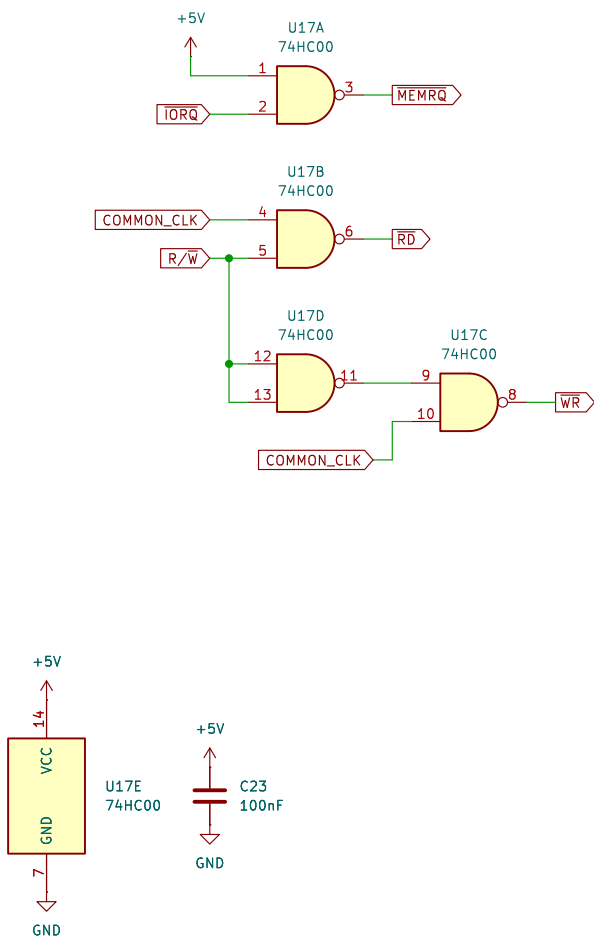

Sheet: /RCBus/
File: rcbus.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 8.0.9

Rev:

Id: 10/10