



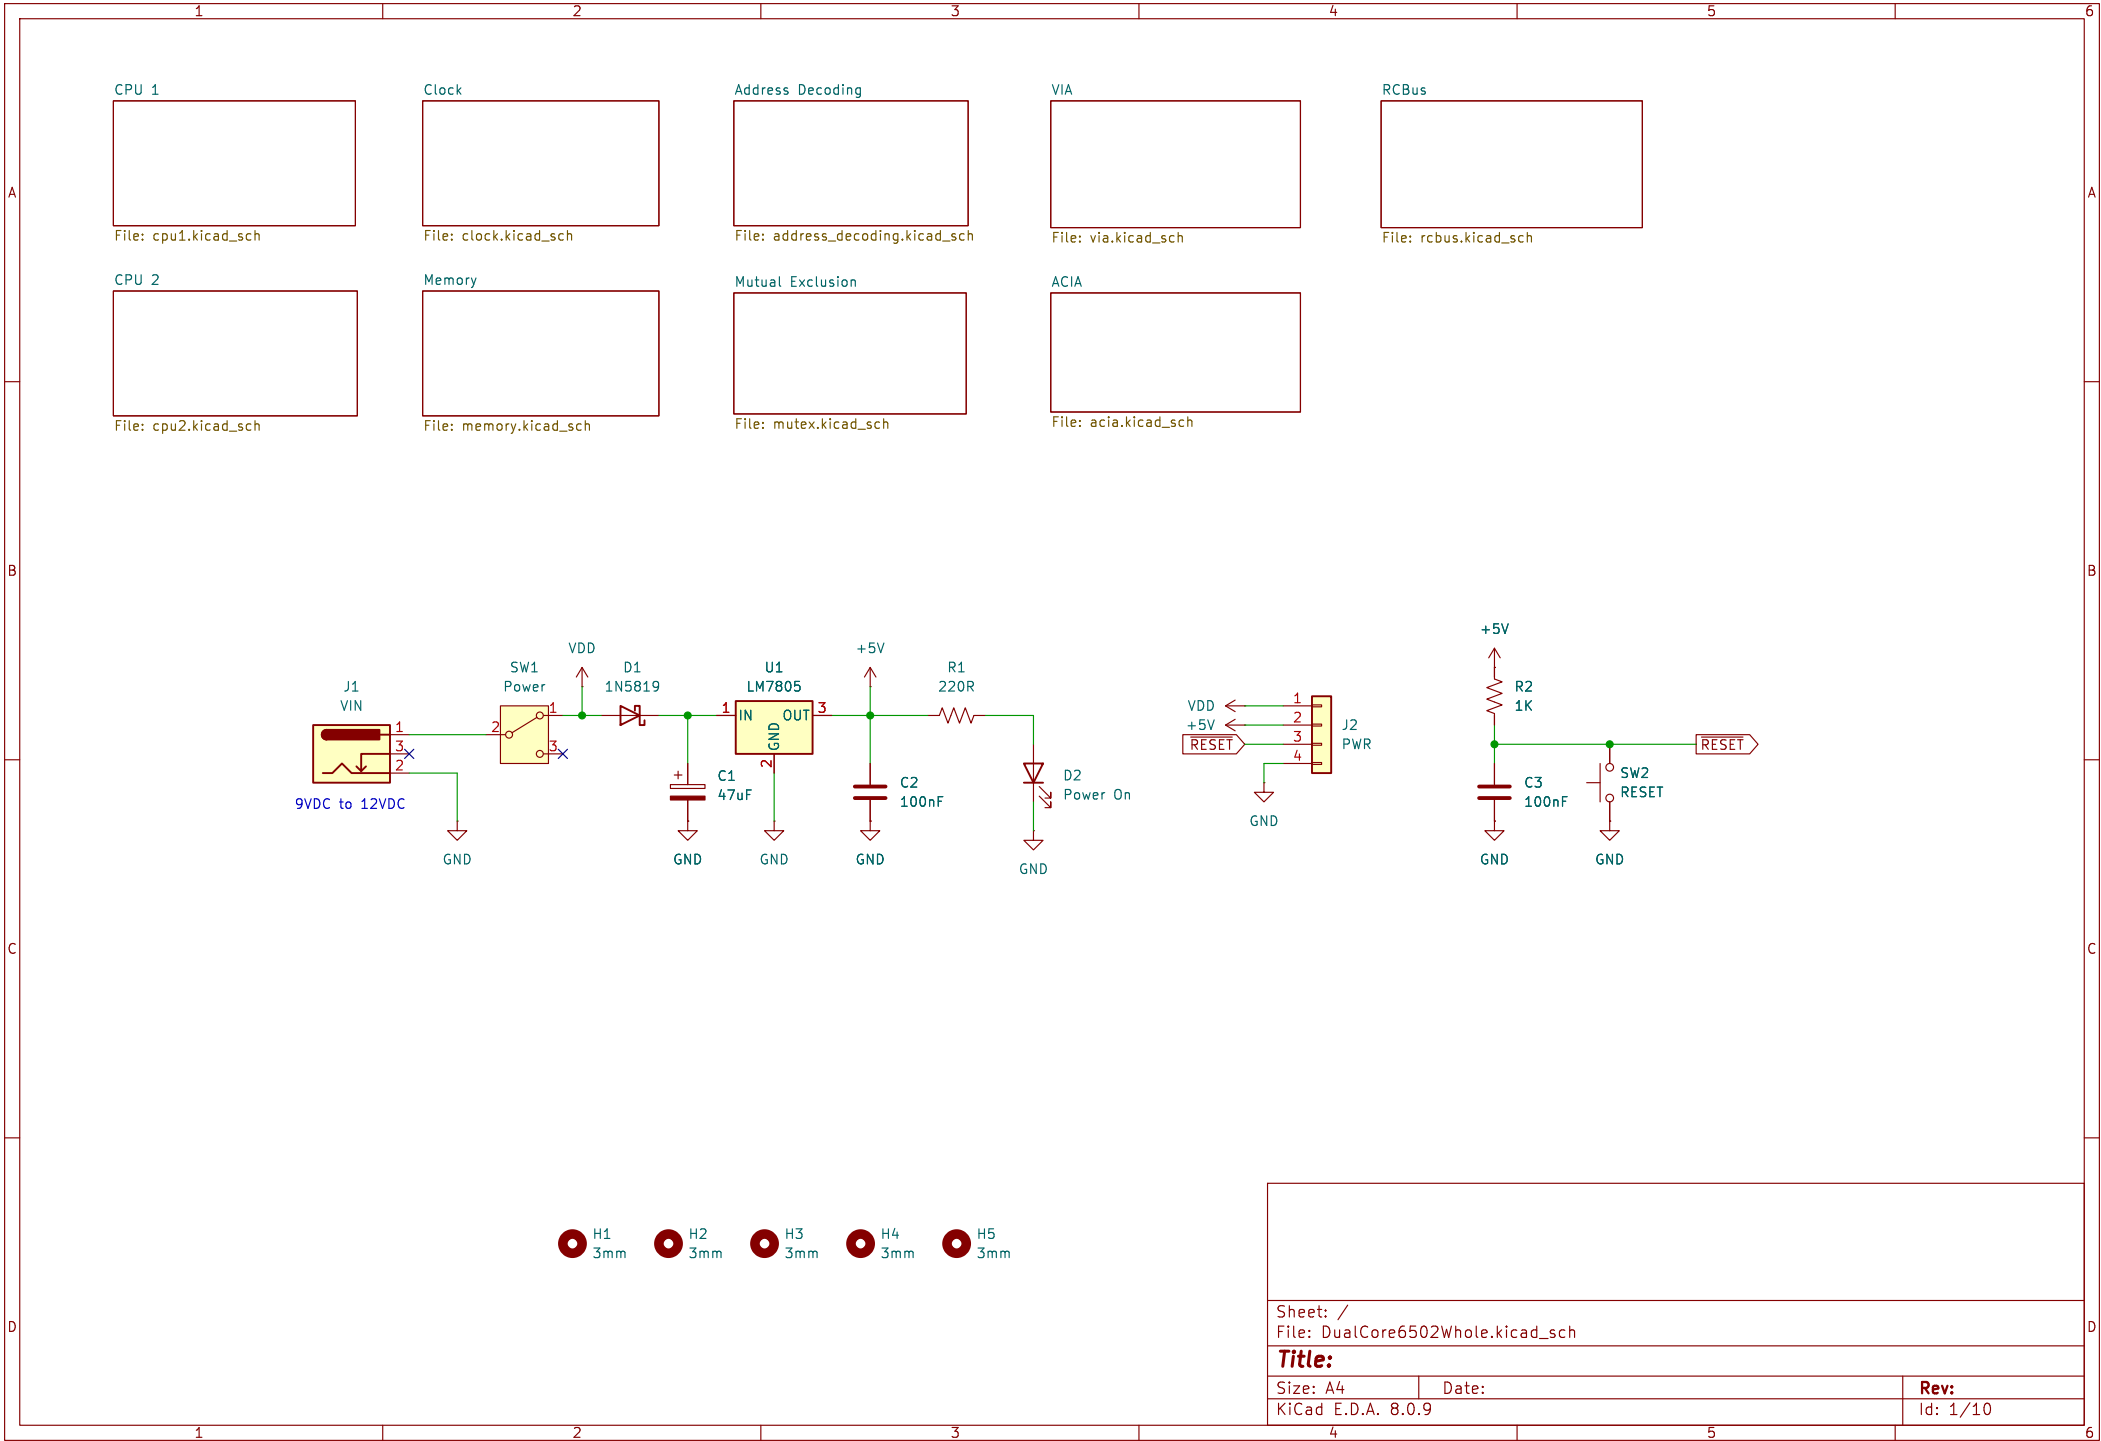

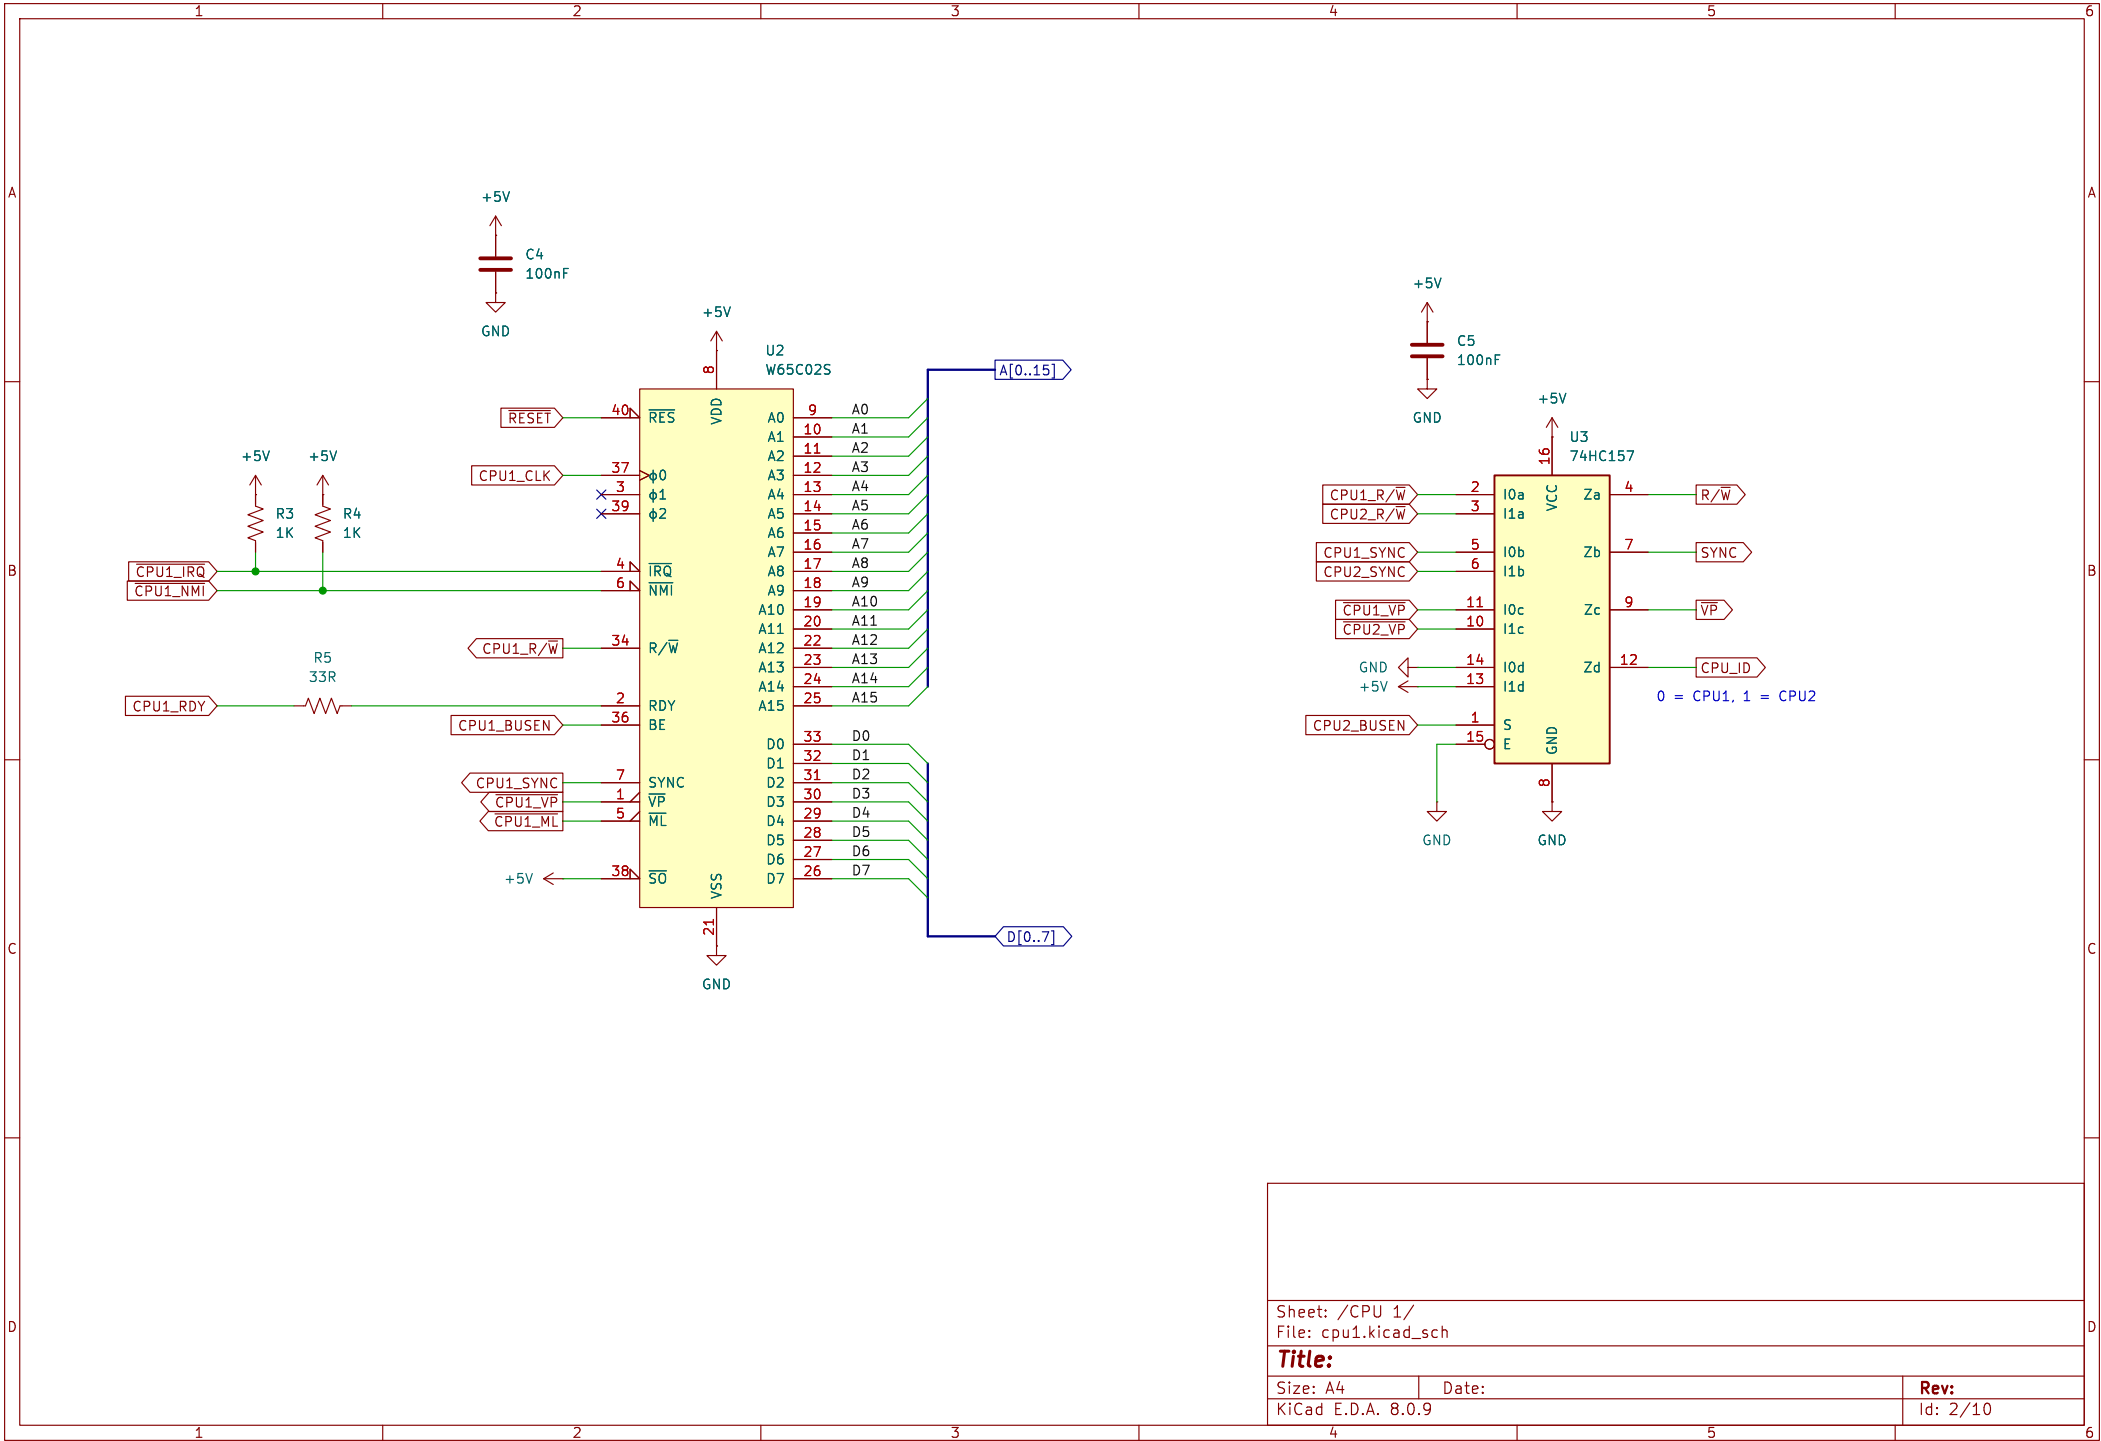

Sheet: /CPU 1/
File: cpu1.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 8.0.9

Rev:

Id: 2/10

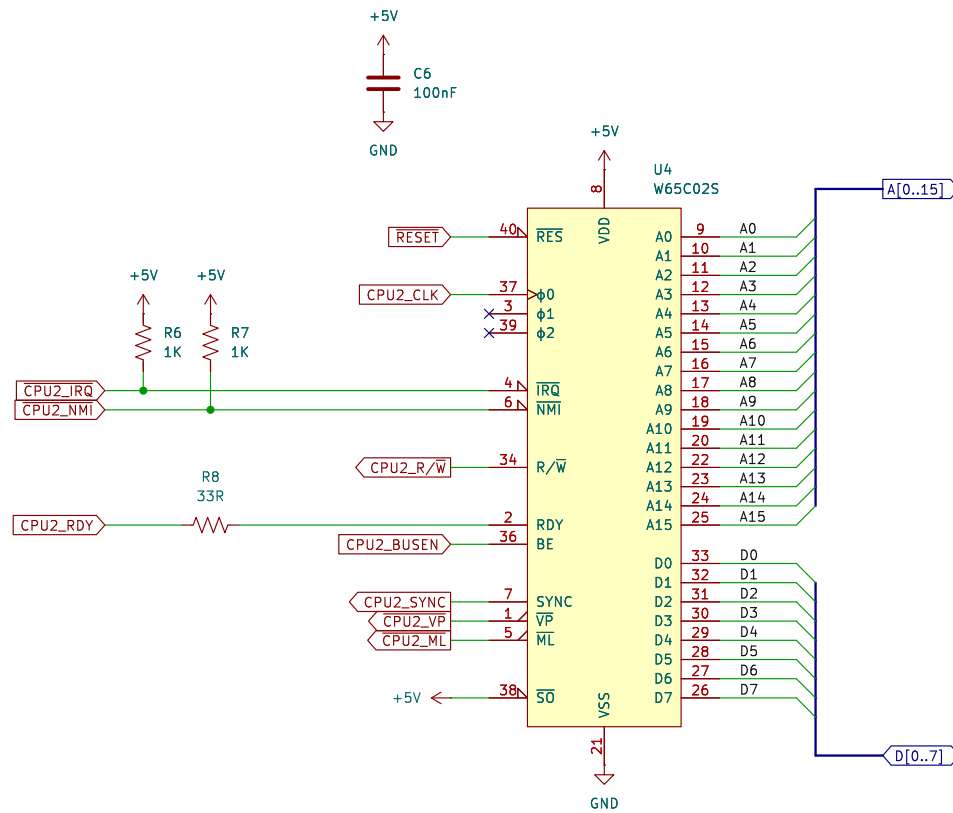

Sheet: /CPU 2/
File: cpu2.kicad_sch

Title:




Size: A4

Date:


KiCad E.D.A. 8.0.9

Rev:


Id: 3/10

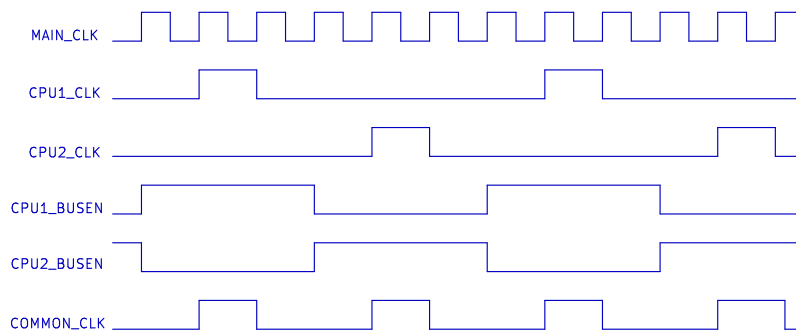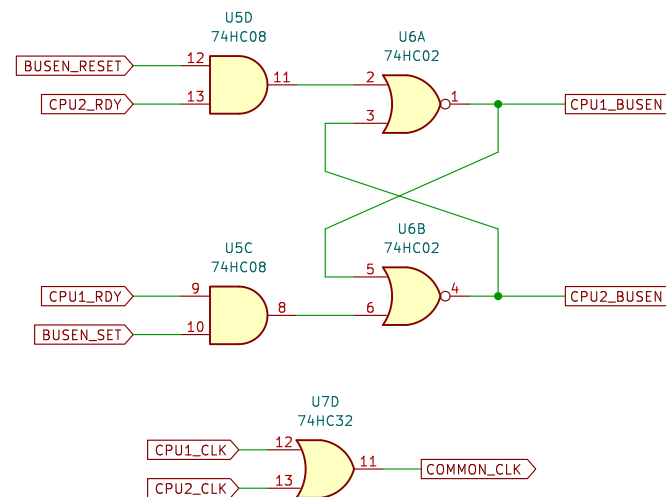

COMMON_CLK can be used to gate access to daughter chips on either clock.

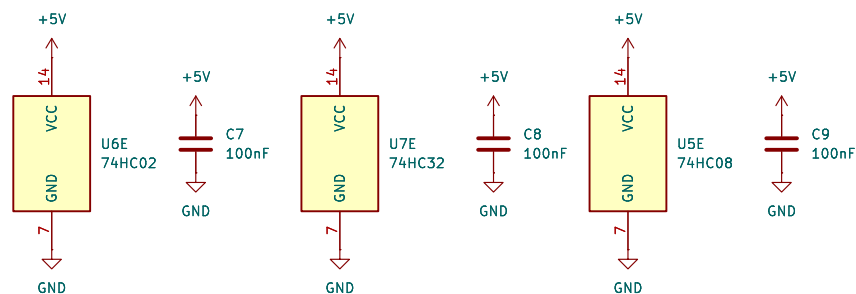

Sheet: /Clock/		
File: clock.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.9		Id: 4/10

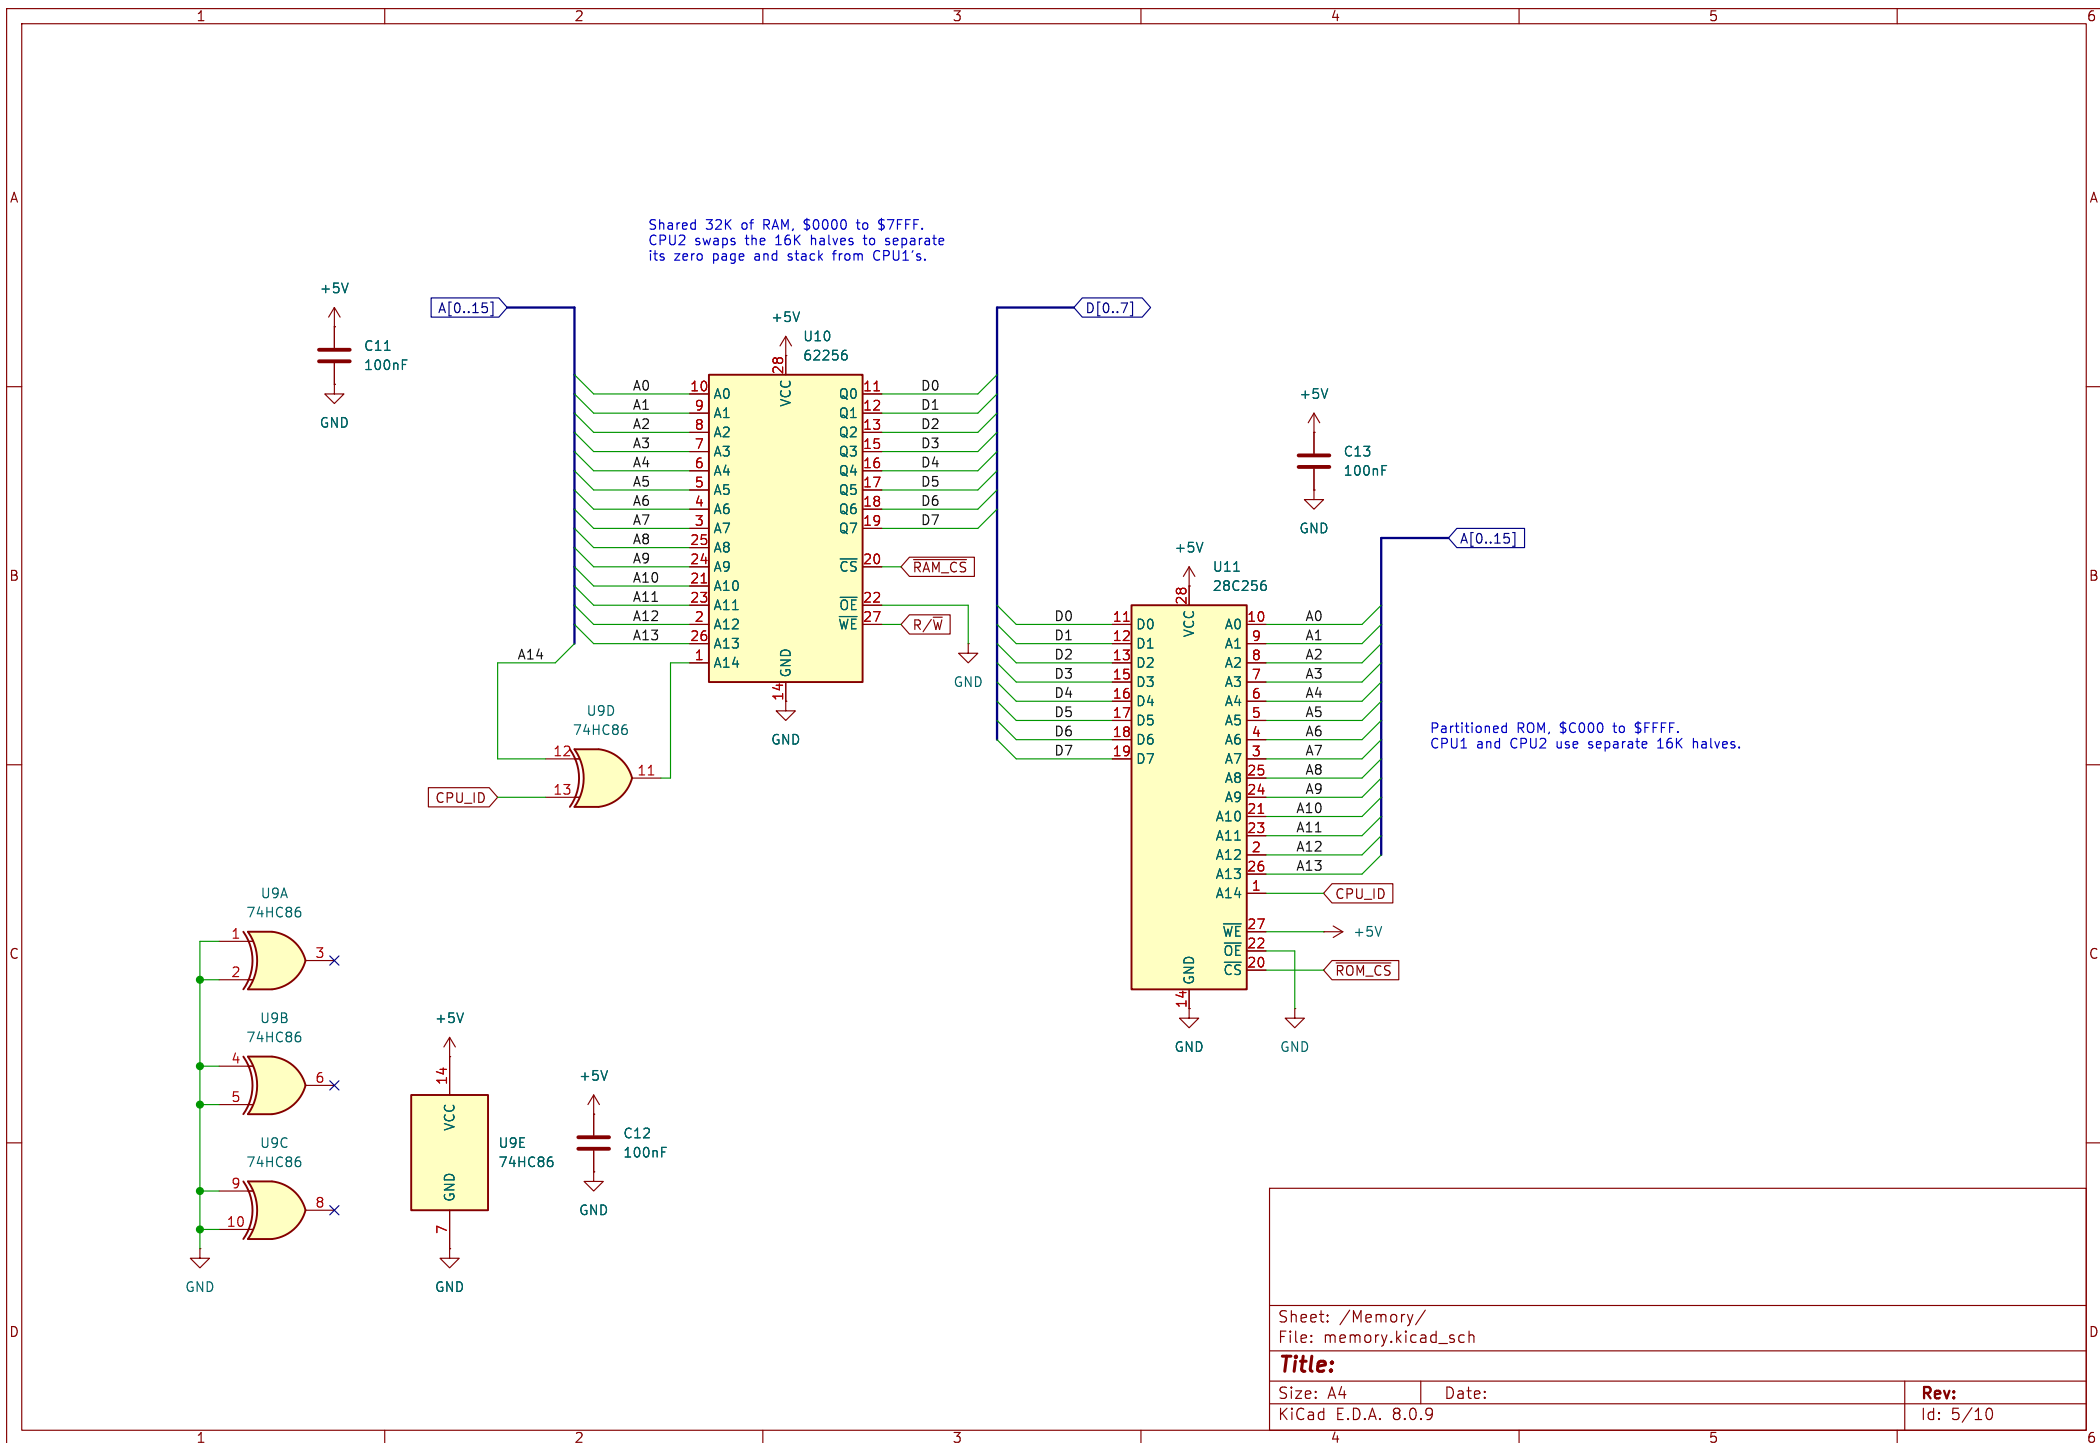

Sheet: /Memory/
File: memory.kicad_sch



Title:

Size: A4 Date:

KiCad E.D.A. 8.0.9

Rev:

Id: 5/10

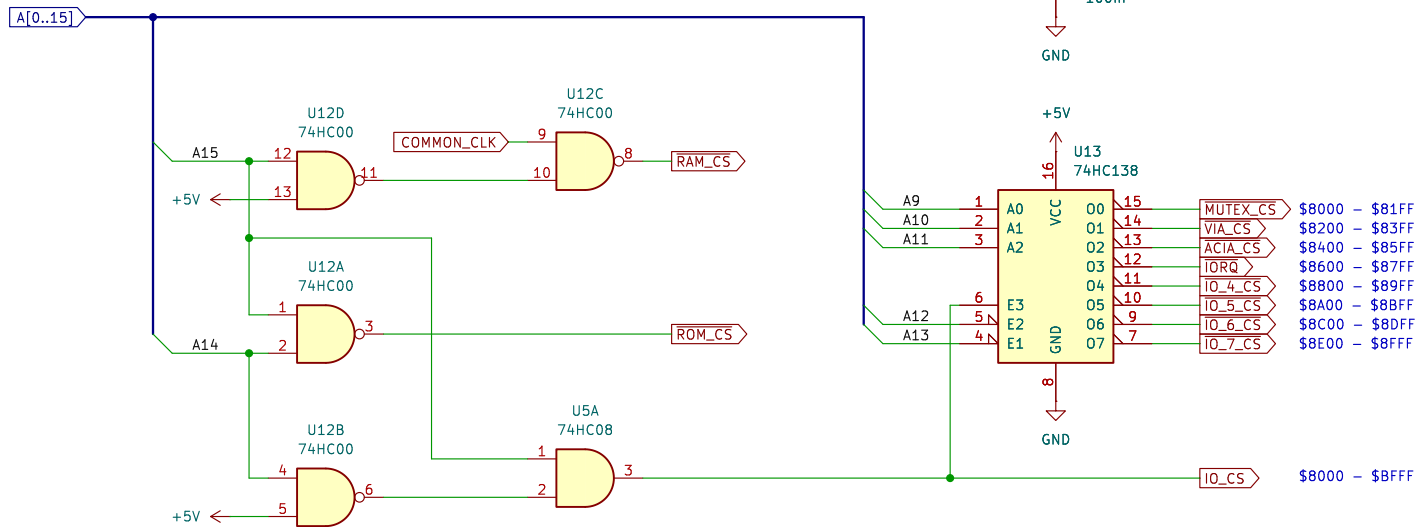

Sheet: /Address Decoding/
File: address_decoding.kicad_sch

Title:

Size: A4
KiCad E.D.A. 8.0.9

Date:



Rev:
Id: 6/10

```
mutex_init:
    lda $$ff
    sta $8000
    rts

mutex_lock:
    inc $8000
    beq mutex_locked
    dec $8000
    jmp mutex_lock
mutex_locked:
    rts


mutex_unlock:
    dec $8000
    rts
```

If a CPU is accessing the mutex counter for read-modify-write, disable the other CPU.

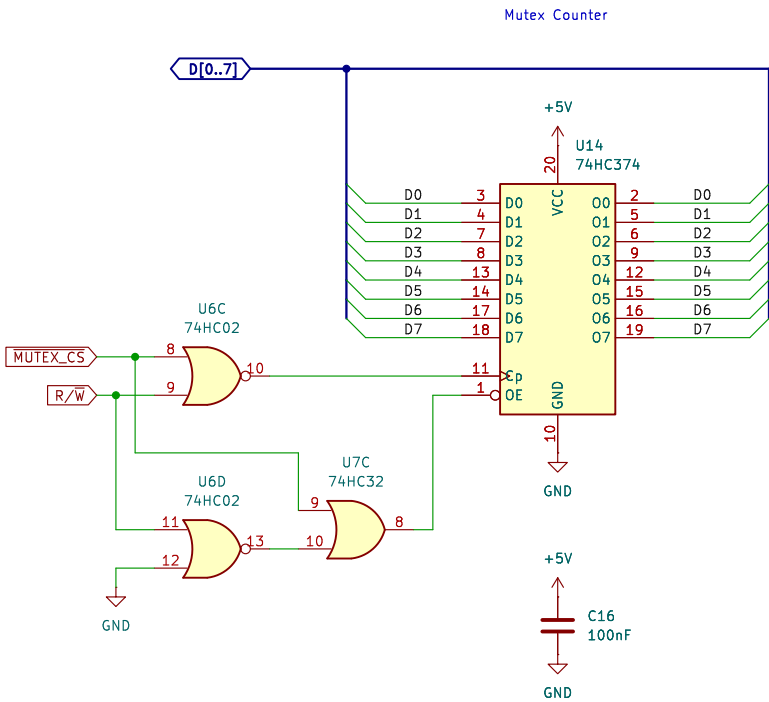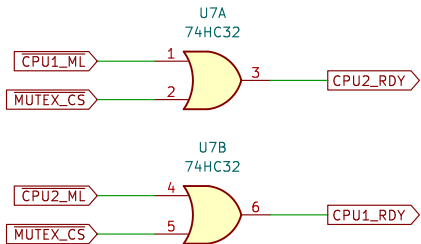

Address range: \$8210 to \$821F on CPU1

Other VIA's can be placed at \$822x, \$824x, \$828x, and \$830x.
A4 must not be 1 in the other addresses or a bus conflict will occur.

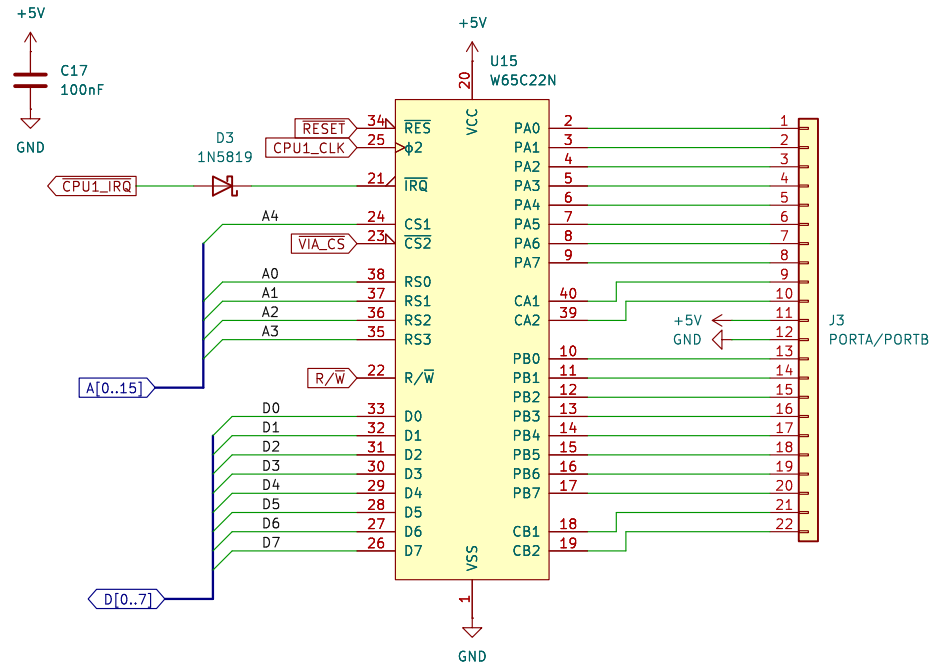


Sheet: /VIA/
File: via.kicad_sch

Title:



Size: A4
KiCad E.D.A. 8.0.9

Date:

Rev:
Id: 8/10

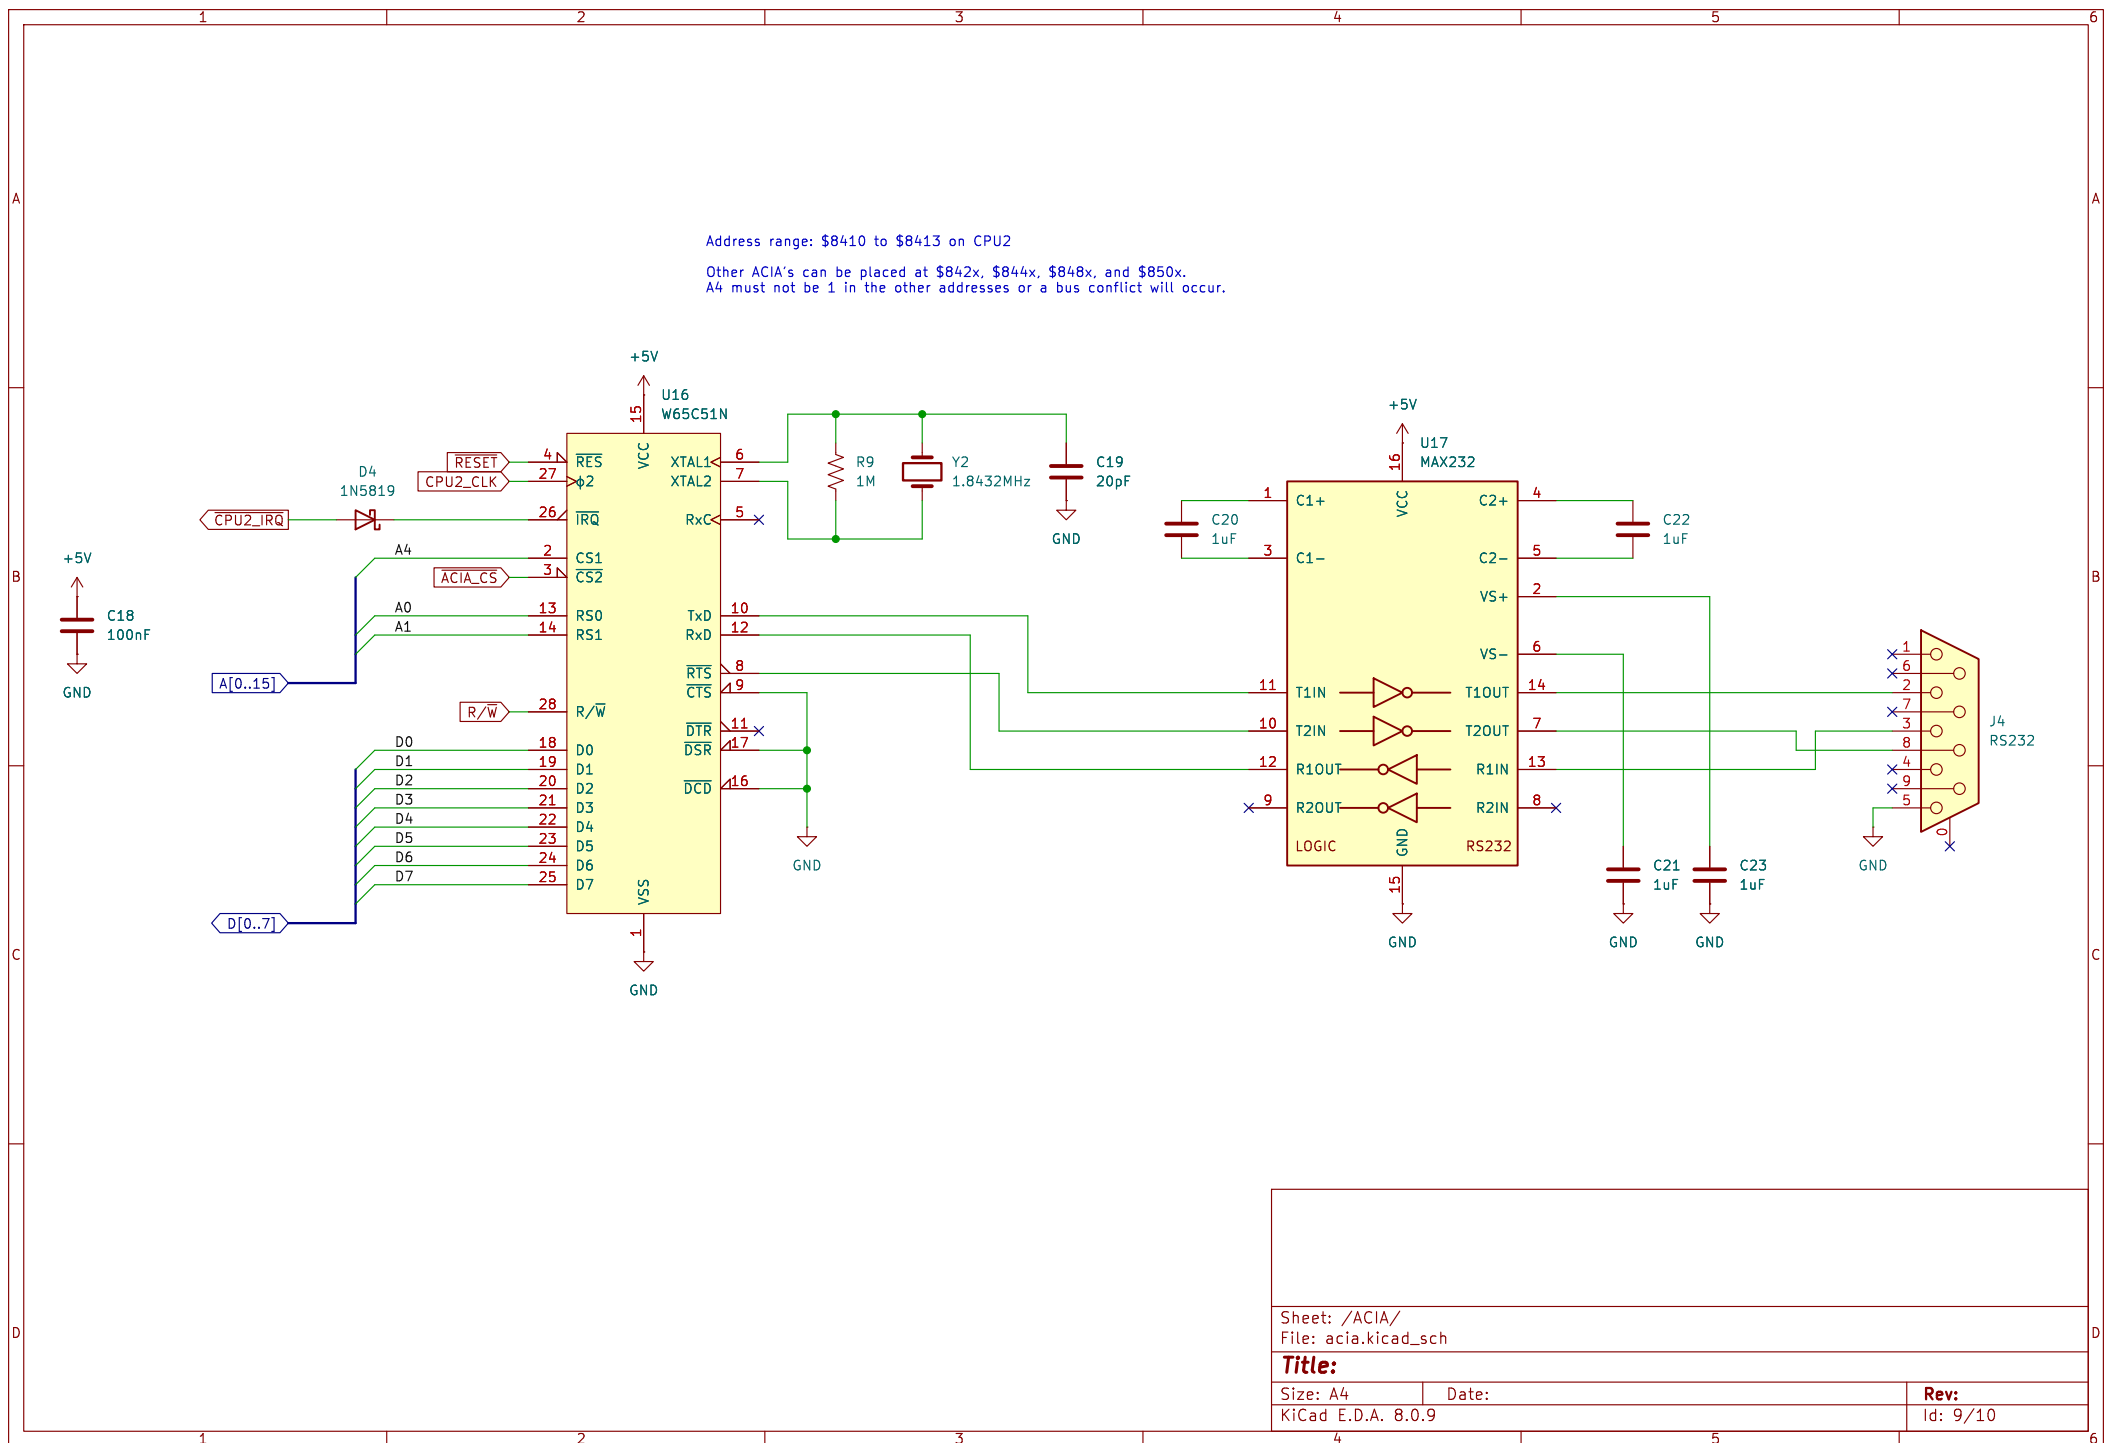

Address range \$8600 to \$86FF is used for Z80-style I/O.

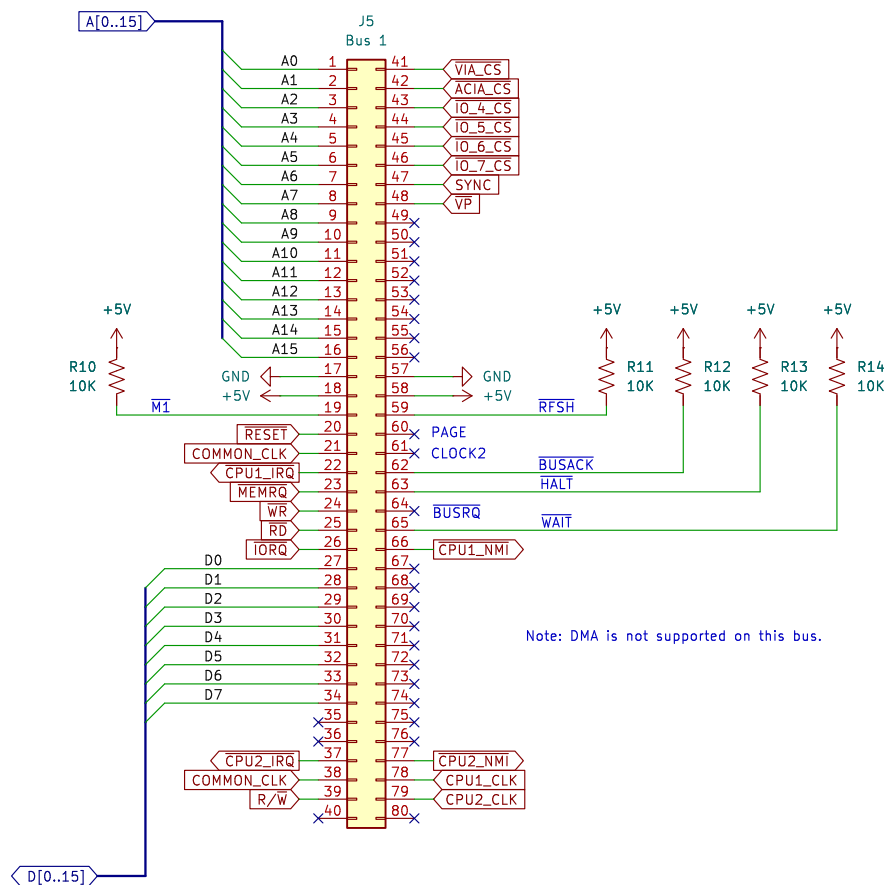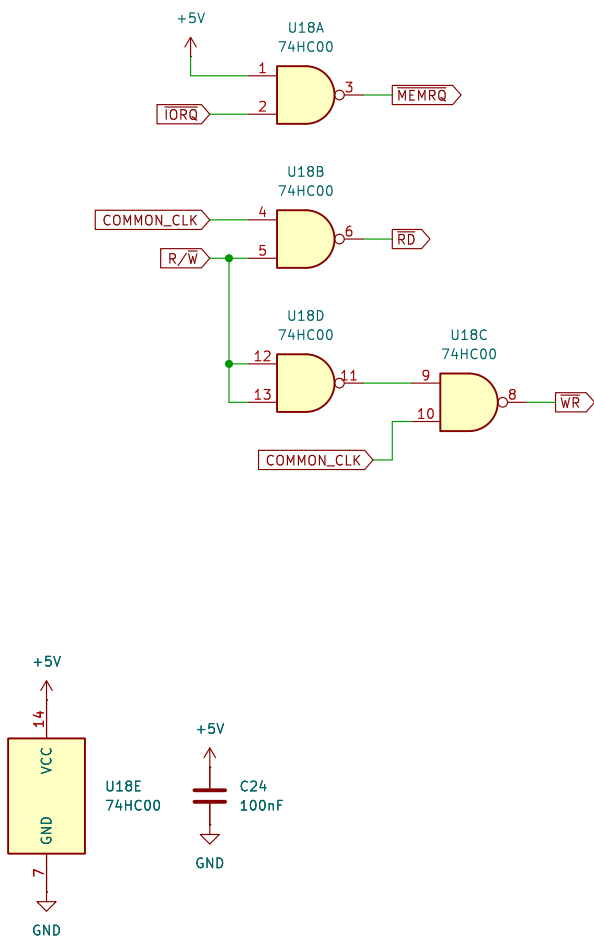

Note: DMA is not supported on this bus.

Sheet: /RCBus/
File: rcbus.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 8.0.9

Rev:

Id: 10/10