


Bike Corral Location Guidelines

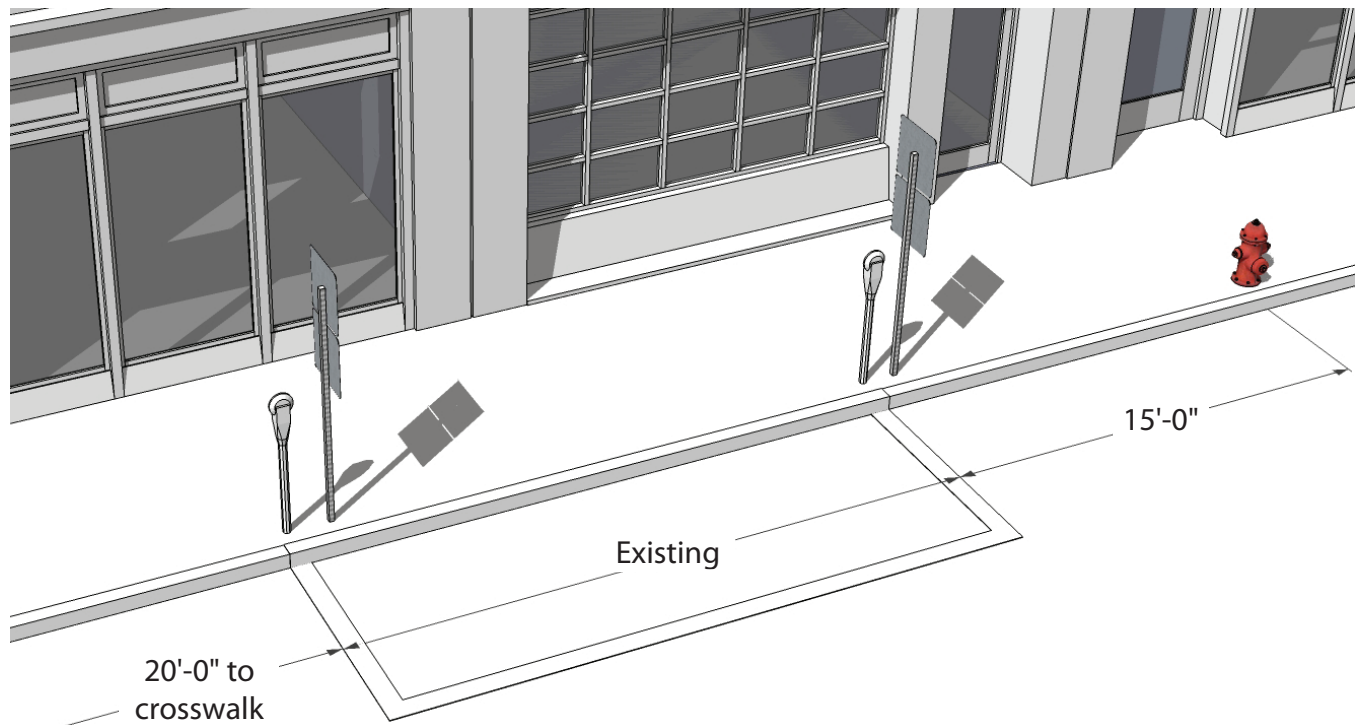

CITY OF PITTSBURGH ORDINANCE TITLE FIVE - TRAFFIC - ARTICLE VII - PARKING - CHAPTER 5 - SECTION 541.01


- Within 3-feet of public or private driveway
- Within 15-feet of a fire hydrant, on-street
- Within 5-feet of fire hydrant, on-sidewalk
- Within 20-feet of a crosswalk at an intersection
- Within 30-feet upon approach of stop sign or other traffic control signal
- At any place where official signs prohibit standing

BEST PRACTICES GUIDELINES

- At least 5-feet to any electrical, water or sewer utility
- Must not extend into travel lane
- Location nearest to street corner provides benefits to both pedestrians and motorists
- Inline locations should be chosen in front of businesses with a high degree of customer turn-over

Note: Proposed bike corrals should be installed at existing on-street parking metered locations, based on the assumption that existing metered spaces comply with City of Pittsburgh requirements

Bike Corral Design Toolkit

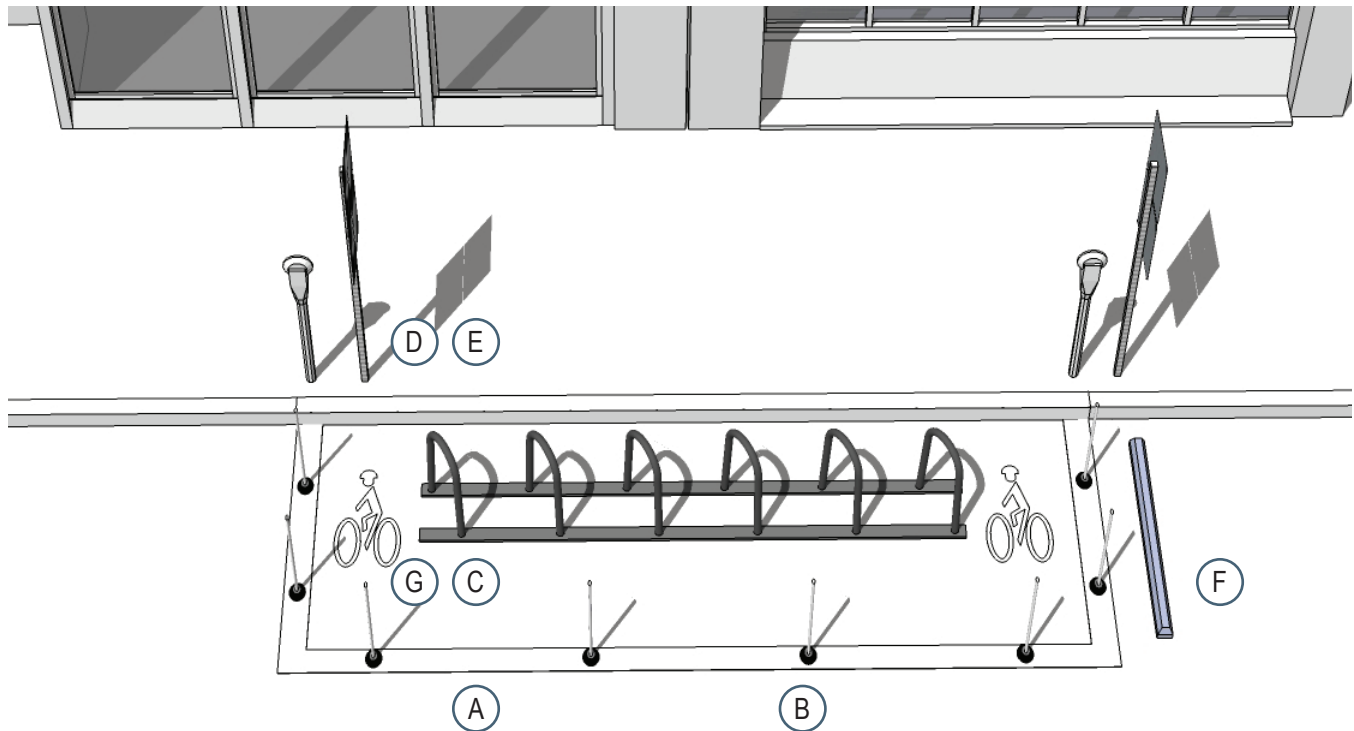

TYPICAL CORRAL DESIGN ELEMENTS

- (A) Solid White Thermo Plastic Reflective Tape / Paint
- (B) 28-inch Fluorescent White Flexible Bollards with Reflective Band
- (C) Staple (U-Shaped) Bike Racks, angled 60 or 90 degrees to curb

OPTIONAL DESIGN ELEMENTS

- (D) Bicycle Parking Sign
- (E) Curb Painting
- (F) 5-foot Concrete Parking Block, Painted
- (G) On-street Bicycle Decal, Painted

CLEARANCES / NOTES

- Typical corral dimension: 20-feet by 7-feet (or area of existing on-street parking space)
- 6 Staple (U-Shaped) Racks per corral to provide 12 bike parking spaces
- Minimum 30-inches clearance from the curb to centerline of rack
- Minimum 30-inches clearance between inline racks
- 48-inches clearance at access aisles, marked with painted bike decal, optional
- Galvanized finish on racks recommended

Note: Refer to DPW specifications for applicable guidelines and regulations