



USB-C 5 V POWER ONLY / PROTECTION

[illegible]

Do not attach provider credentials. GPIO6 only drives a local transistor gate; timeout/reset state is OFF

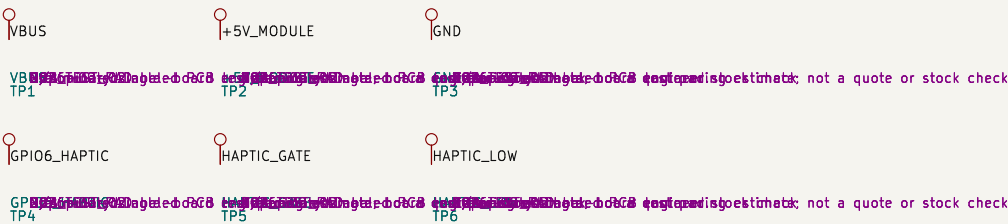

current, inrush, motor current, vibration, RF, thermals, and enclosure fit require physical validation.

ERC/DRC are tool evidence only; no fabrication or physical validation claimed
 Manufacturer/MPN/Datasheet properties are the BOM source of truth
 500 mA input ceiling; haptic load <=150 mA; verify module current on bench
 USB 5 V SELV only; optional carrier; unmodified Waveshare RF module
Open hardware design — [rwrfre/AgentPing](#)

Sheet: /
 File: agentping-carrier.kicad_sch

<i>Title: AgentPing Waveshare ESP32-C6 Touch AMOLED 1.64 carrier</i>		
Size: A3	Date: 2026-09-02	Rev: A0
KiCad E.D.A. 9.0.9.1—unknown		Id: 1/1