


PASSIVE KNOWN-LOOPBACK HARNESS – DISCONNECTED, DE-ENERGIZED USE ONLY

One-to-one A:01↔B:01 through A:16↔B:16; no power injection or active circuitry. Mating-face orientation/key verification remains an issue #4 physical fixture gate.


J1

Bank A mating housing

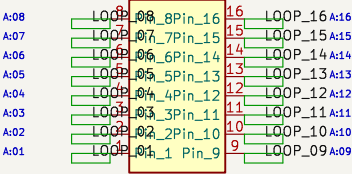

J2

Bank B mating housing

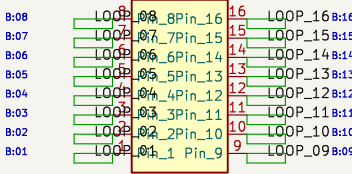

Static electrical definition – physical fixture pending

Sheet: /
File: known-loopback.kicad_sch

Title: PinPath known-loopback adapter harness

Size: A4
KiCad E.D.A. 9.0.9.1-unknown

Date: 2026-09-02

Rev: rev-a-candidate
Id: 1/1