




PINPATH – DISCONNECTED, DE-ENERGIZED PASSIVE ASSEMBLIES ONLY







Never connect mains, Pwr, battery/battery packs, powered USB through a test bank, vehicle, medical/other medical wiring, or any energized circuit.
Protection and prechecks reduce ordinary fault stress; they do not authorize live testing or create cable-certification, hgap, insulation, or precision-resistance capability.

USB / controller / controls / debug








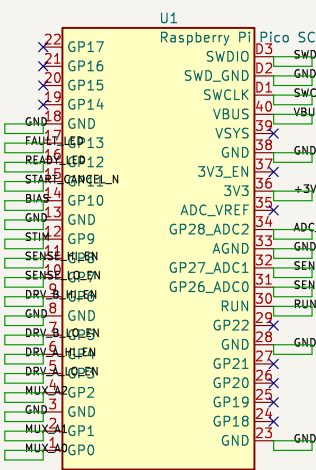


READY 0 (green is supplemental)

FAULT 1 (red is supplemental; distinct cap)





Stimulus and sense muxes – active-high enables have external 100k pulldowns



Bank A protected endpoint networks

Bank B protected endpoint networks



All electrical limits remain unvalidated; firmware, as an authorized state until controlled bench characterization.

Open hardware – static analysis only

Static analysis only

Title: PinPath rev-A candidate carrier schematic

Static analysis only

Static analysis only

Rev: rev-A candidate