


option:
 use separeate 5V→2.5V LDO
 for ADC_REF and as POTI supply.
 reduces part count and noise because
 the 3V3 rail has changing loads, for
 example flashing LEDs.

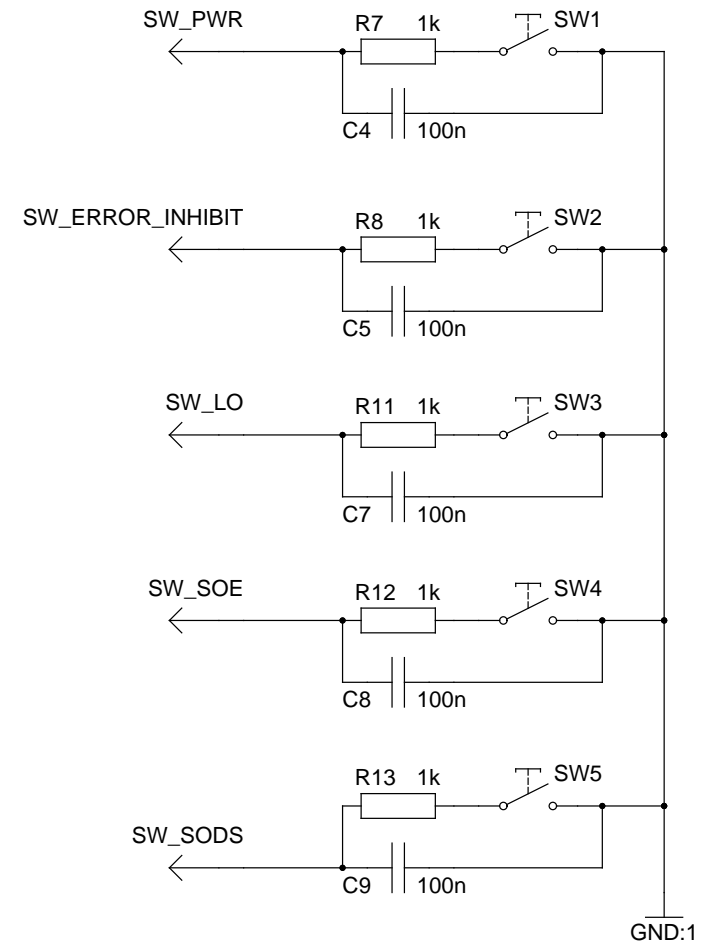

TITLE

FILE:

PAGE

OF

REVISION:

DRAWN BY: