



HK 150

MOBILE GLYCOL HEATING SYSTEM



FEATURES

- 2-700 FT HOSES (MADE UP OF 1-700FT, 1-500FT, & 1-200FT)
 - THAW UP TO 2,800 FT²
 - CURE UP TO 5,600 FT²
- TEMPORARY HEAT UP TO 6,200 FT²
 - 50+ HRS RUN TIME
- COMPACT DESIGN (124"X72"X70")
- LIFTING HOOKS & FORKLIFT POCKETS (STANDARD)
 - POWERED REEL WITH FREEWHEEL FEATURE
- ON BOARD AIR COMPRESSOR FOR EVACUATING HOSES


WWW.TAMARACK-INDUSTRIES.COM

WWW.HEAT-KING.CA




**Tamarack
Industries**

DOUBLE LOOP TECHNOLOGY

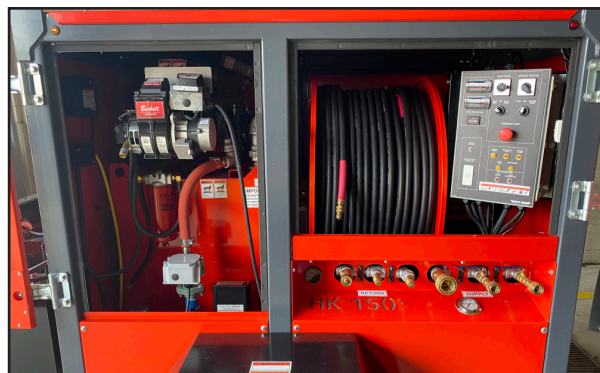

By using shorter hoses, more fluid, and higher efficiency pumps with increased flow, the Heat King provides more consistent temperature to the field for better concrete curing and ground thawing results.

HEAT KING ADVANTAGE

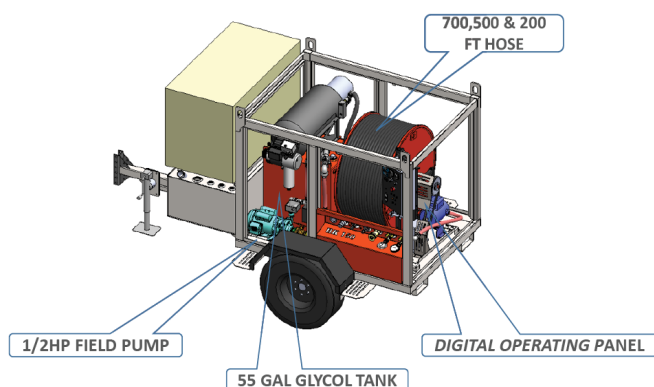

- Glycol gets up to operating temperature faster than competitors (designated circulation pump pulls from the reservoir and doesn't have to push cold glycol through the field hoses).
- Glycol can be blown out of the field hoses and stored in the reservoir, eliminating the need to store it in a container. This is convenient when abandoning the hoses in concrete or for space heating set-ups and take-downs.
- Tying into existing manifolds such as in-floor heating.
- Oil and gas applications such as tank heating and having the ability to retrieve the glycol from steam coils.
- Glycol can be left in the field hoses or in the reservoir.

HK 150 SPECIFICATIONS

• Hose	1 - 700 ft, 1-500 ft, 1-200 ft (5/8" Hose)	• Interior Lights	Standard for ease of night operation
• Hose	Unspool with one person	• Mud Tray	Added under the reel to catch mud debris
• Supply Manifold	2 - 1/2" quick connect & 1-1" quick connect	• Heater Capacity Diesel	150,000 BTU/H Heating Fuel Input
• Return Manifold	2 - 1/2" quick connect & 1-1" quick connect	• Glycol Tank	55 US GAL
• Ground Thawing Capacity	2,800 ft ²	• Electrical Requirements	1 - 120V AC 20A Circuits
• Concrete Curing Capacity	5,600 ft ²	• Generator (Optional)	1 - 7 kw or 1- 6 kw MQ
• Temporary Heating Capacity	6,200 ft ² (Varies with R-Value)	• Axle	1 - 4,400lb Leaf Springs, Electric Brakes
• Field Pump	1/2 Hp Centrifugal	• Hitch	2 5/16" Ball (Pintle also available)
• Circulating Pump	1/2 Hp Centrifugal	• Dimensions	124"x72"x70" (Including Heater Vent)
• Fuel Tank	70 US Gal.	• Weight (Fuel Empty/Full)	3,204 lbs/ 3,703 lbs
• Run Time	50+ Hours	• Fuel Consumption	HK 150= 1.1 GPH, Genset=0.55 GPH
• Larger	Higher capacity & better towing		
• Flo Indicator	Ensures proper operation		

Printed in Canada- 2026
Specifications subject to change without notice.