

1 Part 1: Phase Estimation Using PLL

1.1 Manual PLL

1. - No narrative required for this section.

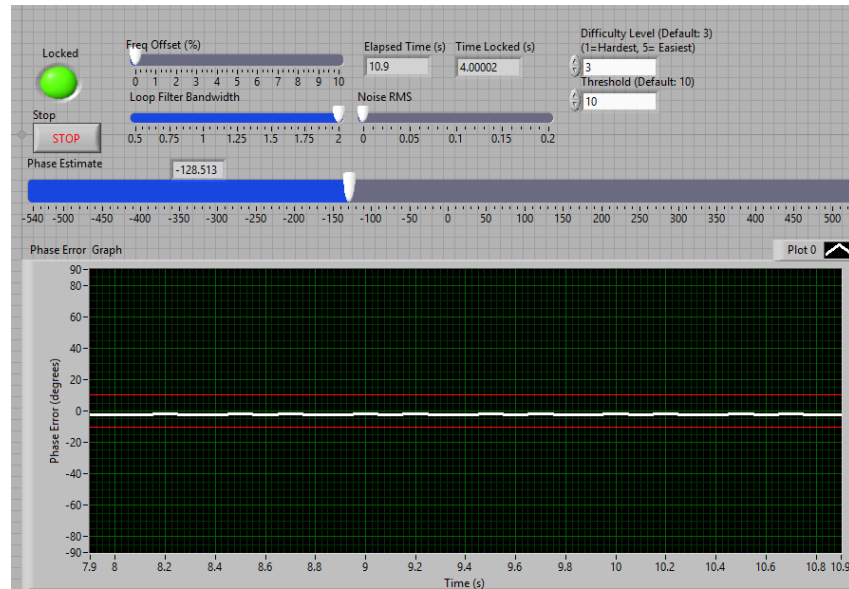


Figure 1: 1.1 - Output of Phase Detector with Freq. Offset = 0Hz, Bandwidth = 2, Noise = 0

1.2 Write-Up

1 - Insert