


Project:	Type:
Product Code:	Date:

V021026

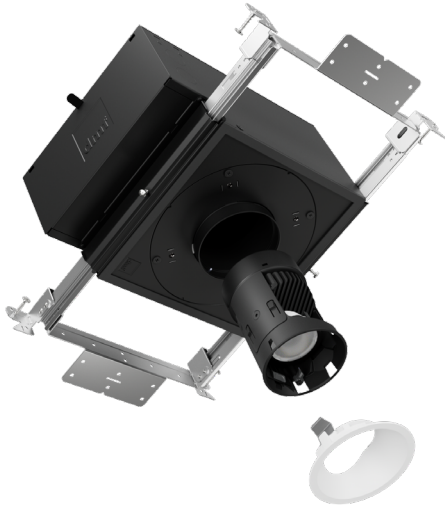

Artafex 2" Round Adjustable

SMALL APERTURE Delivers the ultimate in quiet ceiling designs

PRECISION LOCK COLLAR Eliminates over-cutting and ensures perfect cutout

ARCHITECTURE-GRADE Deep die-cast aluminum knife edge trim provide unmatched precision and exceptionally easy installation

DIMMING COMPATIBILITY GUARANTEED In-house designed integrated driver ensures seamless compatibility with every major lighting control system

INSTALLATION

Ceiling Thickness

New Construction: 1/2" up to 1 1/4"
Remodel, Digital Modules: 1/2" up to 1 1/4"

Ceiling Material

Drywall, Millwork

TRIMS

Style

Standard Micro Flange, Flangeless, Pinhole

Finish

White, Black, Bronze, Clear Diffuse,
Custom Color (RAL Colors)

Premium Metalized Finish

Brass, Copper, Graphite

LIGHT OUTPUT & DISTRIBUTION

Module

Adjustable

Adjustment

360° directional aim, 35° tilt

Lumens (Power)

750 lm (12.5W)

Color Quality

True Spectrum®

Color Temperature

Tunable White (4000K–1800K)

Beam Spread



30°
Spot



40°
Flood



50° x 30°
Linear Spread



50°
Wide Flood

POWER & CONTROLS

Input Voltage

120V

Dimming

PhaseX (0.1%)

RATINGS & CERTIFICATIONS



IC (Insulation Contact) Rated ¹



ASTM E283 Certified Air Tight



Chicago Plenum



UL Listed for Damp Location



RoHS Compliant

WARRANTY

10 year limited warranty; 50,000 hours



PRODUCT BUILDER

ROUND HOUSING

EXAMPLE: X2NCR

PRODUCT CODE		INSTALLATION		SHAPE	
X2				R	
X2	2" Housing	NC	New Construction	R	Round
		CP	Chicago Plenum		
		RD	Remodel, Digital Modules (DALI/PhaseX)		

GATEWAY

EXAMPLE: ART-GWX

PRODUCT CODE	
ART-GWX	
ART-GWX	DMX Input

MODULE

EXAMPLE: ART2A07TT1SPX

PRODUCT CODE		LUMENS		COLORMETRIC		CCT		BEAM SPREAD		DIMMING	
ART2A		07		T		T1				X	
ART2A	Adjustable	07	750 lm	T	True Spectrum®	T1	Tunable White (4000K–1800K)	SP	Spot (30°)	X	PhaseX
								FL	Flood (40°)		
								WF	Wide Flood (50°)		
								LS	Linear Spread (50°x30°)		

ROUND TRIM

EXAMPLE: X2TRASWHMF

PRODUCT CODE		FINISH		OPTION	
X2TRAS	2" Standard ¹	WH	White	[Blank]	(Pinhole Only)
X2TRAP	2" Pinhole ²	BK	Black	MF	Micro Flange
		BZ	Bronze	FL	Flangeless ⁵
		CW	Clear Diffuse, White Flange ³		
		CC	Custom Colors (RAL Colors)		
		PREMIUM METALIZED FINISH			
		BR	Brass ⁴		
		CO	Copper ⁴		
		GR	Graphite ⁴		

¹ Only available in Micro Flange and Flangeless option² Only available in White or Black finish; Not available in Micro Flange option³ Only available in Standard Micro Flange option⁴ Only available in Standard style⁵ Not available in Clear Diffuse finish; Requires Flangeless Mud or Wood Kit in New Construction housings

PRODUCT BUILDER



OPTICS

XAXOP	Bundled Adjustable Optics Kit <i>(Includes Spot, Flood, Wide Flood and Linear Spread)</i>
XAXSP	Spot (30°) Optic
XAXFL	Flood (40°) Optic
XAXWF	Wide Flood (50°) Optic
XAXLS	Linear Spread (50°x30°) Optic
XAXHD	High Diffusion Front Lens <i>(Can be paired with all beam spreads to provide extra diffusion; Only available as an optical accessory)</i>
XAXCL	Clear Front Lens <i>(Can be paired with all beam spreads to decrease diffusion and define edges; Only available as an optical accessory)</i>

ACCESSORIES

X2KRMUD	Flangeless Mud Kit <i>(Required for New Construction installation of Flangeless Trim in drywall ceiling)</i>
X2KRWOOD	Wood Kit <i>(Required for New Construction installation in wood ceiling)</i>
X2KRTEMPLATE	Router Template <i>(Recommended for routing 3 3/16" [81mm] cutout in wood ceiling)</i>

GATEWAY

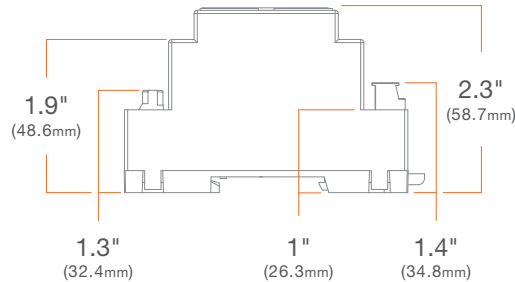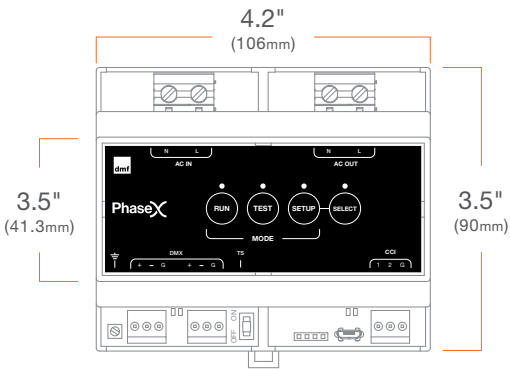

DMX Input ART-GWX

SUMMARY

The ART-GWX is a Gateway for use with Artafex PhaseX enabled fixtures. It provides full control of up to 64 PhaseX lighting fixtures connected over standard electrical wiring. The ART-GWX interfaces to lighting control systems using the industry standard DMX/RDM protocol unlocking the benefits of digital control and tunable white lighting.

FEATURES:

- Digital control of up to 64 fixtures over standard AC wiring
- Ultra reliable, 2-way communication
- Integration using DMX/RDM protocol
- Direct Integration to Crestron Home via DMX-C
(Requires DIN-GWDL Gateway from Crestron)

ELECTRICAL RATINGS:

- Input Voltage: 120VAC, 60Hz
- Max Output Current: 8A

ELECTRICAL CONNECTIONS

- AC Input: Screw terminals for AC Line and Neutral. Max 12 AWG wire.
- AC Output Terminal: Screw terminals for AC Line Out and Neutral Out. Max 12 AWG wire.
- DMX Input: (2) 3-position pluggable terminal block. (DMX+, DMX-, G)
- USB: Micro-USB connection for use with PhaseX Commissioning Utility
- Contact Closure: 2 x contact closure inputs. (CCI1, CC2, G)
(Reserved for future use)

ENVIRONMENTAL: 32 – 104°F (0 – 40°C)


ENCLOSURE:

- DIN Rail mount
- Black ABS plastic

COMPLIANCE:

- UL508, UL8750
- For installation within an electrical enclosure

MODULE

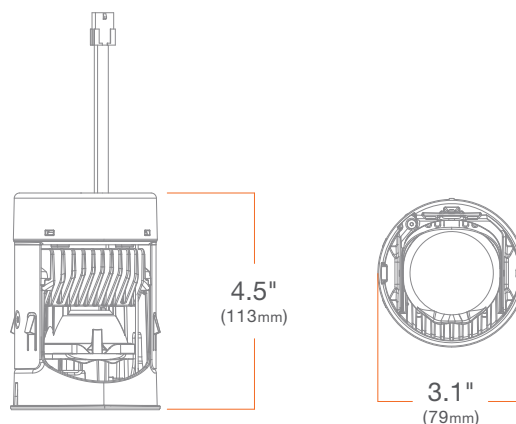

SUMMARY

	TUNABLE WHITE
CCT	4000K - 1800K
LUMENS (POWER)	750 lm (12.5W)
EFFICACY	56 lm/W
COLOR QUALITY	True Spectrum® 93 CRI, 3-step SDCM
BEAM SPREAD	Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50° x 30°)
DIMMING	PhaseX
LED CHIP	Bridgelux
LISTINGS	ENERGY STAR® qualified*, California Title 24 2019–2022 JA8-E compliant, UL Listed for Damp Location, UL Certified US-CA, Declare, RoHS compliant
ADJUSTMENT	360° directional aim, 35° tilt
SLOPE CEILING COMPATIBILITY	Up to 35°

* Refer to ENERGY STAR Certified light fixtures database

ADDITIONAL

INPUT VOLTAGE: 120V, 60Hz

MAX INPUT CURRENT (120V): 0.11 amps

CONNECTOR: 6-pin Molex




POWER FACTOR: Greater than 0.9

TOTAL HARMONIC DISTORTION: Less than 20%

AMBIENT OPERATING TEMPERATURE: -20°C to 40°C

WARRANTY: 10 year limited warranty; 50,000 hours at 70% lumen maintenance

HOUSING

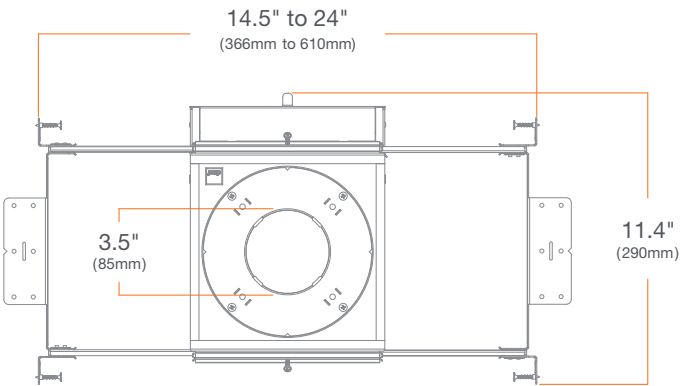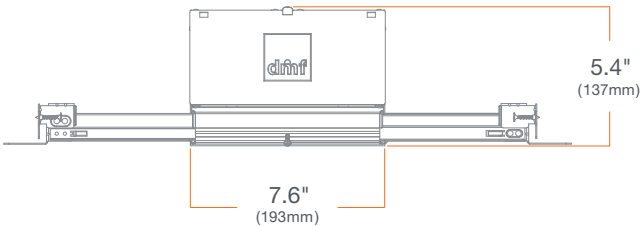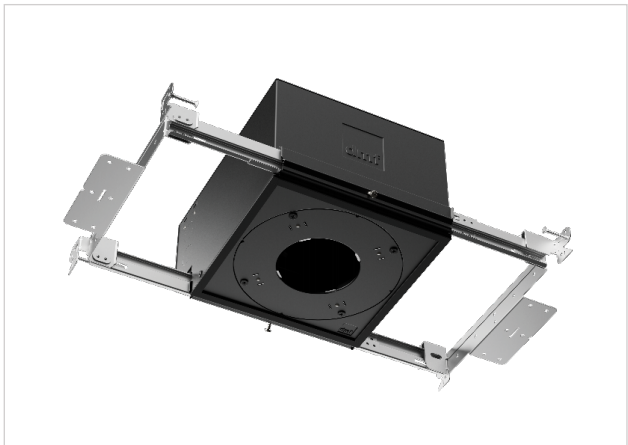

New Construction **X2NCR** Chicago Plenum **X2CPR**

SUMMARY

JUNCTION BOX: Equipped with 10 knockouts: four 1/2" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Adjustable Bar Hangers for 14 1/2" to 24" joist spacing, when bar hangers are broken down, up to 10.5" of joist spacing. Compatible with traditional joists, Armstrong TM ceiling, Hat Channel and T-Bar. Vertical adjustment (1/2"-1 1/4") through installation of the round collar.

CEILING: 1/2" up to 1 1/4"

CUTOUT: 3 1/4" (82mm) round opening

LISTINGS: Chicago Plenum, ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims.

HOUSING



Remodel, Digital Modules (DALI/PhaseX)

X2RDR


SUMMARY

JUNCTION BOX: Equipped with four knockouts: two 1/2" trade size knockouts and two romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.

CEILING:

- Drywall: 1/2" - 1 1/4" (12mm-32mm)
- Wood Ceiling: 1/2" - 1" (12mm-25mm)
- Acoustic Ceiling Tiles: 5/8" - 1 1/4" (16mm-32mm)

CUTOUT: 3 1/4" (82mm) round opening

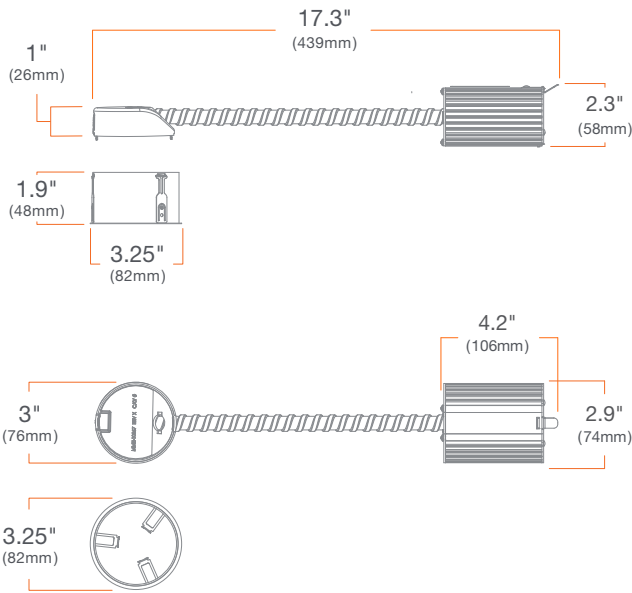

Total Height in Plenum



TRIMS




SUMMARY

CONSTRUCTION: Die-cast aluminum
FINISH: Wet paint
INSTALLATION: Precision Lock Collar included with Flanged or Micro Flange Trim and Flangeless Mud or Wood Kit


Standard Micro Flange

X2TRASWHMF

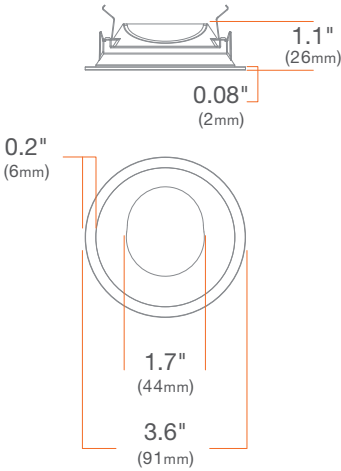


Standard Flangeless

X2TRASWHFL

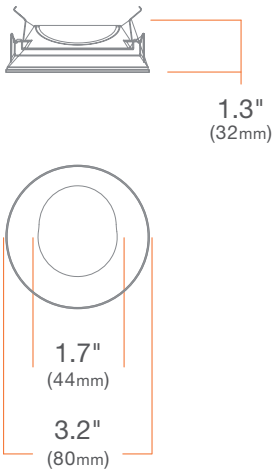


Pinhole

X2TRAPWH

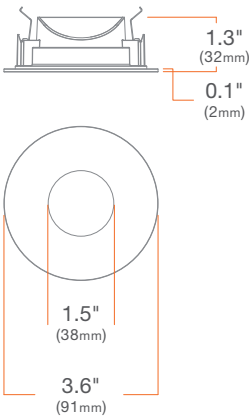

Pinhole Flangeless

X2TRAPWHFL

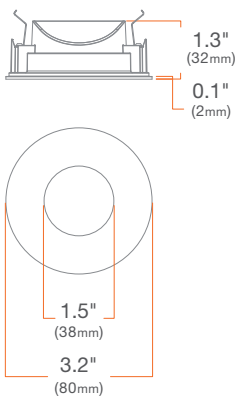

ACCESSORIES




Flangeless Mud Kit

X2KRMUD

SUMMARY: Flangeless Mud Kit (Required for New Construction installation of Flangeless Trim in drywall ceiling)


CEILING: 1/2" up to 1 1/4"

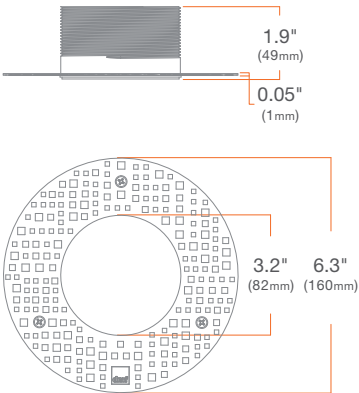

Router Template

X2KRTEMPLATE

SUMMARY: Router Template (Recommended for routing 3 3/16" [81mm] cutout in wood ceiling)

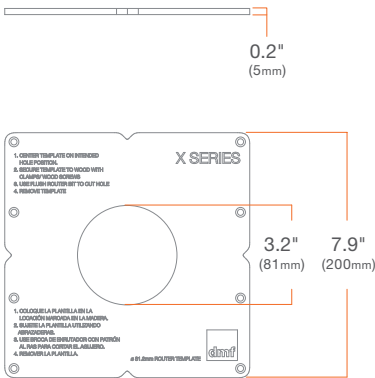


Wood Kit

X2KRWOOD

SUMMARY: Wood Kit (Required for New Construction installation in wood ceiling. Must be mounted on wood before installation to ceiling.)


CEILING: 1/2" up to 1 1/4"

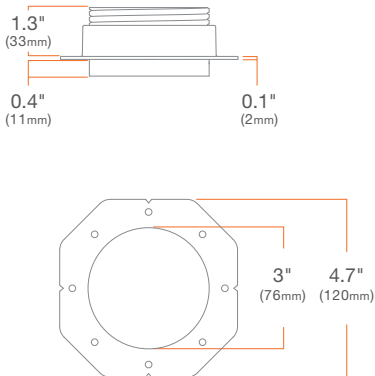

PHOTOMETRY

750 lm, Tunable White (4000K-1800K), Spot **ART2A-07TT1SPX**
2" Standard Micro Flange Trim, White **X2TRASWHMF**

Candela Distribution

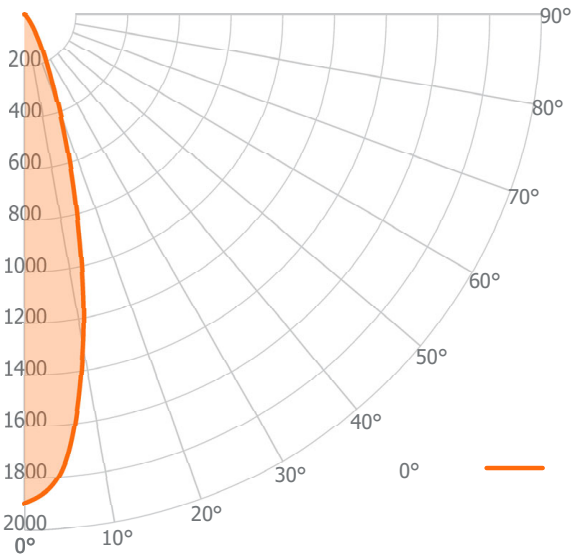

Luminous Intensity

	0°
0°	1898
5°	1757
10°	1306
15°	772
20°	391
25°	201
30°	106
35°	58
40°	31
45°	18
50°	11
55°	8
60°	7
65°	6
70°	5
75°	3
80°	2
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	464	87%
0° - 40°	502	94%
0° - 60°	524	98%
0° - 90°	535	100%
0° - 180°	535	100%


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	210.9 fc	1.4 ft
6 ft	52.7 fc	2.8 ft
9 ft	23.4 fc	4.3 ft
12 ft	13.2 fc	5.7 ft

Input Watts: 12.0 W
Lumens: 535 lm
Efficacy: 45 lm/W
Beam Angle: 27°

750 lm, Tunable White (4000K-1800K), Flood **ART2A-07TT1FLX**
2" Standard Micro Flange Trim, White **X2TRASWHMF**

Candela Distribution

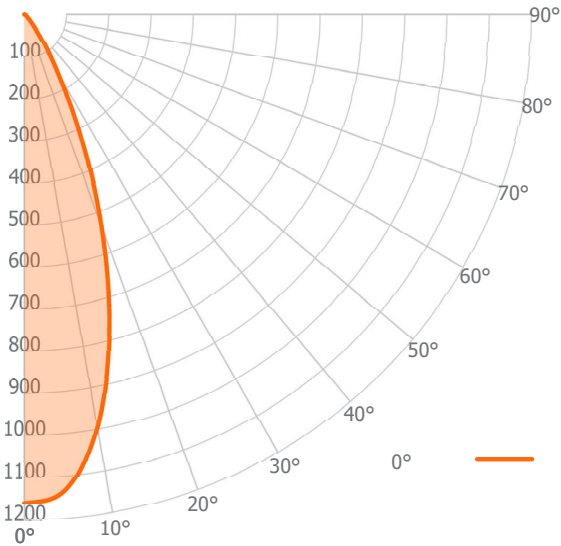

Luminous Intensity

	0°
0°	1160
5°	1132
10°	996
15°	778
20°	535
25°	314
30°	159
35°	74
40°	36
45°	19
50°	10
55°	7
60°	6
65°	5
70°	4
75°	3
80°	2
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	461	85%
0° - 40°	512	94%
0° - 60°	535	98%
0° - 90°	545	100%
0° - 180°	545	100%

Illuminance Chart


Distance from LED	Foot Candles	Diameter
3 ft	128.9 fc	2.1 ft
6 ft	32.2 fc	4.1 ft
9 ft	14.3 fc	6.2 ft
12 ft	8.1 fc	8.3 ft

Input Watts: 12.0 W
Lumens: 545 lm
Efficacy: 45 lm/W
Beam Angle: 38°

PHOTOMETRY

750 lm, Tunable White (4000K-1800K), Wide Flood ART2A-07TT1WFX
 2" Standard Micro Flange Trim, White X2TRASWHMF

Candela Distribution

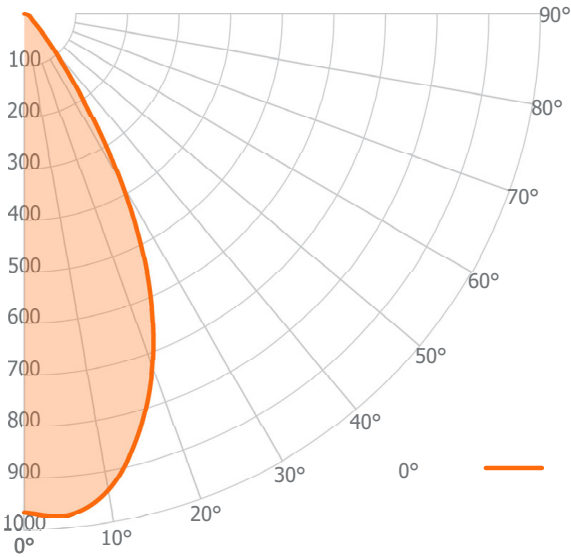

Luminous Intensity

	0°
0°	967
5°	976
10°	937
15°	848
20°	727
25°	569
30°	378
35°	189
40°	86
45°	43
50°	24
55°	18
60°	14
65°	12
70°	9
75°	6
80°	4
85°	2
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	582	74%
0° - 40°	708	91%
0° - 60°	762	97%
0° - 90°	782	100%
0° - 180°	782	100%


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	107.4 fc	3.1 ft
6 ft	26.9 fc	6.1 ft
9 ft	11.9 fc	9.2 ft
12 ft	6.7 fc	12.3 ft

Input Watts: 9.0 W
 Lumens: 782 lm
 Efficacy: 87 lm/W
 Beam Angle: 54°

750 lm, Tunable White (4000K-1800K), Linear Spread ART2A-07TT1LSX
 2" Standard Micro Flange Trim, White X2TRASWHMF

Candela Distribution

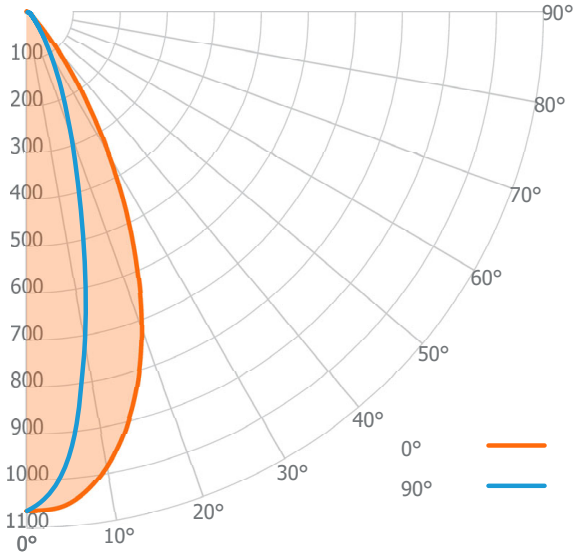

Luminous Intensity

	0°
0°	1065
5°	1052
10°	986
15°	872
20°	718
25°	533
30°	352
35°	203
40°	100
45°	43
50°	22
55°	15
60°	13
65°	11
70°	8
75°	6
80°	4
85°	2
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	401	77%
0° - 40°	472	91%
0° - 60°	505	97%
0° - 90°	519	100%
0° - 180°	519	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	118.3 fc	2.8 ft
6 ft	29.6 fc	5.6 ft
9 ft	13.1 fc	8.4 ft
12 ft	7.4 fc	11.2 ft

Input Watts: 12.0 W
 Lumens: 519 lm
 Efficacy: 43 lm/W
 Beam Angle: 50° x 27°