

|               |       |
|---------------|-------|
| Project:      | Type: |
| Product Code: | Date: |

V021026



## Artafex 2" Round Downlight

**SMALL APERTURE** Delivers the ultimate in quiet ceiling designs

**PRECISION LOCK COLLAR** Eliminates over-cutting and ensures perfect cutout

**ARCHITECTURE-GRADE** Deep die-cast aluminum knife edge trim provide unmatched precision and exceptionally easy installation

**DIMMING COMPATIBILITY GUARANTEED** In-house designed integrated driver ensures seamless compatibility with every major lighting control system

### INSTALLATION

#### Ceiling Thickness

New Construction: 1/2" up to 1 1/4"

Remodel, Digital Modules: 1/2" up to 1 1/4"

#### Ceiling Material

Drywall, Millwork

### TRIMS

#### Style

Standard Micro Flange, Flangeless, Wall Wash, Pinhole, Hyperbolic

#### Finish

White, Black, Bronze, Clear Diffuse, Custom Color (RAL Colors)

#### Premium Metalized Finish

Brass, Copper, Graphite

### LIGHT OUTPUT & DISTRIBUTION

#### Module

Downlight

#### Lumens (Power)

1000 lm (14.5W)

#### Color Quality

True Spectrum®

#### Color Temperature

 Tunable White (4000K–1800K)

#### Beam Spread

 30° Spot

 40° Flood

 50° x 30° Linear Spread

 50° Wide Flood

### POWER & CONTROLS

#### Input Voltage

120V

#### Dimming

PhaseX (0.1%)

### RATINGS & CERTIFICATIONS

 IC (Insulation Contact) Rated

 ASTM E283 Certified Air Tight

 Chicago Plenum

 UL Listed for Wet Location <sup>1</sup>

 RoHS Compliant

 NSF Listed <sup>2</sup>

<sup>1</sup> Flanged trims Only, under covered areas Only

<sup>2</sup> White and Black finish Only

### WARRANTY

10 year limited warranty; 50,000 hours



## PRODUCT BUILDER

## ROUND HOUSING

EXAMPLE: X2NCR

| PRODUCT CODE |            | INSTALLATION |                                        | SHAPE |       |
|--------------|------------|--------------|----------------------------------------|-------|-------|
| X2           |            |              |                                        | R     |       |
| X2           | 2" Housing | NC           | New Construction                       | R     | Round |
|              |            | CP           | Chicago Plenum                         |       |       |
|              |            | RD           | Remodel, Digital Modules (DALI/PhaseX) |       |       |

## GATEWAY

EXAMPLE: ART-GWX

| PRODUCT CODE |           |
|--------------|-----------|
| ART-GWX      |           |
| ART-GWX      | DMX Input |

## MODULE

EXAMPLE: ART2D10TT1SPX

| PRODUCT CODE |           | LUMENS |         | COLORMETRIC |                | CCT |                               | BEAM SPREAD |                         | DIMMING |         |
|--------------|-----------|--------|---------|-------------|----------------|-----|-------------------------------|-------------|-------------------------|---------|---------|
| ART2D        |           | 10     |         | T           |                | T1  |                               |             |                         | X       |         |
| ART2D        | Downlight | 10     | 1000 lm | T           | True Spectrum® | T1  | Tunable White (4000K - 1800K) | SP          | Spot (30°)              | X       | Phase X |
|              |           |        |         |             |                |     |                               | FL          | Flood (40°)             |         |         |
|              |           |        |         |             |                |     |                               | WF          | Wide Flood (50°)        |         |         |
|              |           |        |         |             |                |     |                               | LS          | Linear Spread (50°x30°) |         |         |

## ROUND TRIM

EXAMPLE: X2TRDSWHMF

| PRODUCT CODE |                            | FINISH                   |                                          | OPTION  |                              |
|--------------|----------------------------|--------------------------|------------------------------------------|---------|------------------------------|
| X2TRDS       | 2" Standard                | WH                       | White                                    | [Blank] | (Pinhole or Hyperbolic Only) |
| X2TRDW       | 2" Wall Wash <sup>1</sup>  | BK                       | Black                                    | MF      | Micro Flange                 |
| X2TRDP       | 2" Pinhole <sup>2</sup>    | BZ                       | Bronze                                   | FL      | Flangeless <sup>5</sup>      |
| X2TRDH       | 2" Hyperbolic <sup>2</sup> | CW                       | Clear Diffuse, White Flange <sup>3</sup> |         |                              |
|              |                            | CC                       | Custom Color (RAS Colors)                |         |                              |
|              |                            | PREMIUM METALIZED FINISH |                                          |         |                              |
|              |                            | BR                       | Brass <sup>4</sup>                       |         |                              |
|              |                            | CO                       | Copper <sup>4</sup>                      |         |                              |
|              |                            | GR                       | Graphite <sup>4</sup>                    |         |                              |

<sup>1</sup> Recommended with Wide Flood beam spread; Not available in Bronze finish

<sup>2</sup> Only available in White or Black finish; Not available in Micro Flange option

<sup>3</sup> Only available in Micro Flange (Standard or Wall Wash) option

<sup>4</sup> Only available in Standard style

<sup>5</sup> Not available in Clear Diffuse finish; Requires Flangeless Mud or Wood Kit in New Construction housings

## PRODUCT BUILDER

### OPTICS



|             |                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DXOP</b> | Bundled Downlight Optics Kit <i>(Includes Spot, Flood, Wide Flood and Linear Spread)</i>                                                     |
| <b>DXSP</b> | Spot (30°) Optic                                                                                                                             |
| <b>DXFL</b> | Flood (40°) Optic                                                                                                                            |
| <b>DXWF</b> | Wide Flood (50°) Optic                                                                                                                       |
| <b>DXLS</b> | Linear Spread (50°x30°) Optic                                                                                                                |
| <b>DXHD</b> | High Diffusion Front Lens <i>(Can be paired with all beam spreads to provide extra diffusion; Only available as an optical accessory)</i>    |
| <b>DXCD</b> | Clear Front Lens <i>(Can be paired with all beam spreads to decrease diffusion and define edges; Only available as an optical accessory)</i> |

### ACCESSORIES

|                     |                                                                                                                                       |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>X2KRMUD</b>      | Flangeless Mud Kit <i>(Required for New Construction installation of Flangeless Trim in drywall ceiling)</i>                          |
| <b>X2KRWOOD</b>     | Wood Kit <i>(Required for New Construction installation in wood ceiling)</i>                                                          |
| <b>X2KRTEMPLATE</b> | Router Template <i>(Recommended for routing 3 3/16" [81mm] cutout in wood ceiling)</i>                                                |
| <b>X2KRRETRO6</b>   | 6" to 2" Retrofit Conversion Kit <i>(Requires drywall plaster to upgrade an existing fixture from 6" to 2")</i> <sup>1</sup>          |
| <b>X2KRRETRO45</b>  | 4" or 5" to 2" Round Conversion Kit <i>(Requires drywall plaster to upgrade an existing fixture from 4" or 5" to 2")</i> <sup>1</sup> |
| <b>X2CREXT</b>      | Drywall Extension Collar <i>(New Construction only, for ceilings up to 3")</i>                                                        |
| <b>X2KRWOODXL</b>   | Wood Extension Collar <i>(New Construction only, for ceilings up to 3")</i>                                                           |

<sup>1</sup> For more detailed Information, please refer to [Retrofit Conversion Kits spec sheet](#)

## GATEWAY

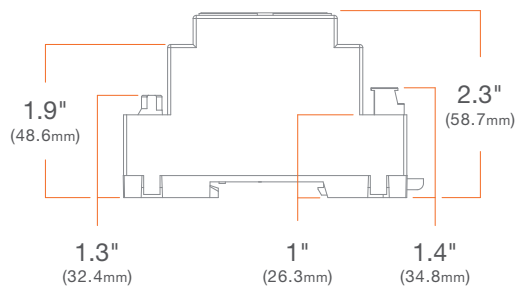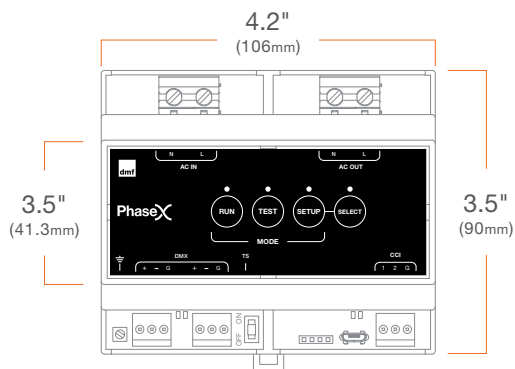DMX Input **ART-GWX**

## SUMMARY

The ART-GWX is a Gateway for use with Artafex PhaseX enabled fixtures. It provides full control of up to 64 PhaseX lighting fixtures connected over standard electrical wiring. The ART-GWX interfaces to lighting control systems using the industry standard DMX/RDM protocol unlocking the benefits of digital control and tunable white lighting.

## FEATURES:

- Digital control of up to 64 fixtures over standard AC wiring
- Ultra reliable, 2-way communication
- Integration using DMX/RDM protocol
- Direct Integration to Crestron Home via DMX-C  
(Requires DIN-GWDL Gateway from Crestron)

## ELECTRICAL RATINGS:

- Input Voltage: 120VAC, 60Hz
- Max Output Current: 8A

## ELECTRICAL CONNECTIONS

- AC Input: Screw terminals for AC Line and Neutral. Max 12 AWG wire.
- AC Output Terminal: Screw terminals for AC Line Out and Neutral Out. Max 12 AWG wire.
- DMX Input: (2) 3-position pluggable terminal block. (DMX+, DMX-, G)
- USB: Micro-USB connection for use with PhaseX Commissioning Utility
- Contact Closure: 2 x contact closure inputs. (CCI1, CC2, G)  
(Reserved for future use)

**ENVIRONMENTAL:** 32 – 104°F (0 – 40°C)


## ENCLOSURE:

- DIN Rail mount
- Black ABS plastic

## COMPLIANCE:

- UL508, UL8750
- For installation within an electrical enclosure

## MODULE

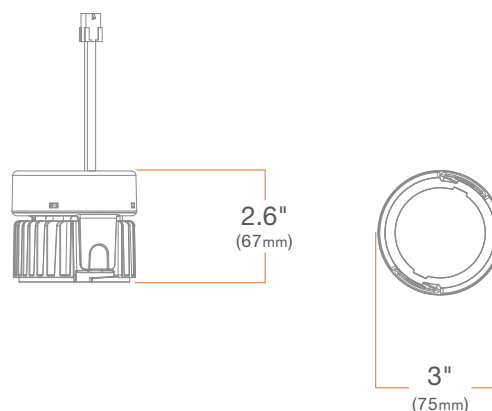

## SUMMARY

|                       | TUNABLE WHITE                                                                                                                                                                                              |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CCT                   | 4000K - 1800K                                                                                                                                                                                              |
| LUMENS (POWER)        | 1000 lm (14.5W)                                                                                                                                                                                            |
| EFFICACY              | 70 lm/W                                                                                                                                                                                                    |
| WIDTH FOR WOOD COLLAR | 4 3/4"                                                                                                                                                                                                     |
| COLOR QUALITY         | True Spectrum® 93 CRI, 3-step SDCM                                                                                                                                                                         |
| BEAM SPREAD           | Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50° x 30°)                                                                                                                                       |
| DIMMING               | PhaseX                                                                                                                                                                                                     |
| LED CHIP              | Bridgelux                                                                                                                                                                                                  |
| LISTINGS              | ENERGY STAR® qualified <sup>1</sup> , California Title 24 2019–2022 JA8-E compliant, UL Listed for Wet Location <sup>2</sup> , UL Certified US-CA, Declare, RoHS compliant, NSF/ANSI 2 Listed <sup>3</sup> |

<sup>1</sup> Refer to ENERGY STAR Certified light fixtures database

<sup>2</sup> With flanged trims, under covered areas only

<sup>3</sup> In accordance to NSF/ANSI 2 for Splash Zone having designated trim finishes

## ADDITIONAL

**INPUT VOLTAGE:** 120V, 60Hz

**MAX INPUT CURRENT (120V):** 0.13 amps

**CONNECTOR:** 6-pin Molex



**POWER FACTOR:** Greater than 0.9

**TOTAL HARMONIC DISTORTION:** Less than 20%

**AMBIENT OPERATING TEMPERATURE:** -20°C to 40°C

**WARRANTY:** 10 year limited warranty; 50,000 hours at 70% lumen maintenance

# HOUSING

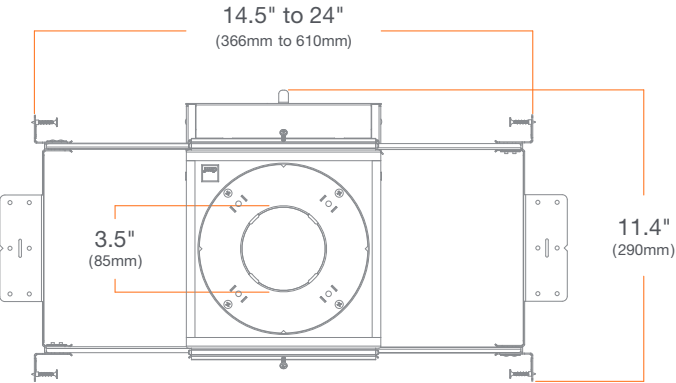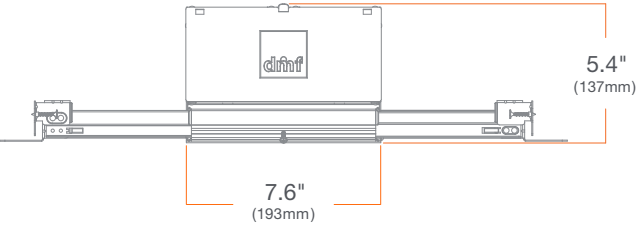

**New Construction** X2NCR  
**Chicago Plenum** X2CPR

## SUMMARY

**JUNCTION BOX:** Equipped with 10 knockouts: four 1/2" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.

**MOUNTING:** Adjustable Bar Hangers for 14.5" to 24" joist spacing, when bar hangers are broken down, up to 10.5" of joist spacing. Compatible with traditional joists, Armstrong™ ceiling, Hat Channel and T-Bar. Vertical adjustment (1/2"-1 1/4") through installation of the round collar.

**CEILING:** 1/2" up to 1 1/4"

**CUTOUT:** 3 1/4" (82mm) round opening

**LISTINGS:** Chicago Plenum, ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims or Hexcell Louver.

HOUSING



Remodel, Digital Modules (DALI/PhaseX)

X2RDR


SUMMARY

**JUNCTION BOX:** Equipped with four knockouts: two 1/2" trade size knockouts and two romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.

**CEILING:**

- Drywall: 1/2" - 1 1/4" (12mm-32mm)
- Wood Ceiling: 1/2" - 1" (12mm-25mm)
- Acoustic Ceiling Tiles: 5/8" - 1 1/4" (16mm-32mm)

**CUTOUT:** 3 1/4" (82mm) round opening

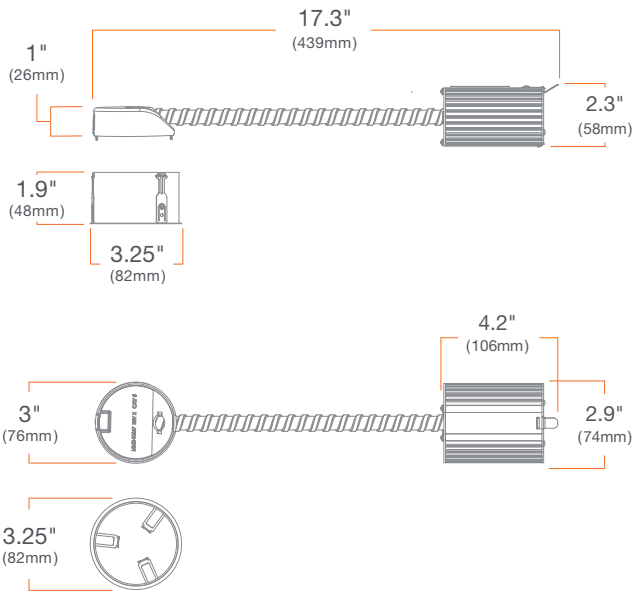

Total Height in Plenum



| Trim      | A              |
|-----------|----------------|
| Wall Wash | 5.4" [137 mm]  |
| Others    | 5.25" [133 mm] |

TRIMS




SUMMARY

- CONSTRUCTION:** Die-cast aluminum
- FINISH:** Wet paint
- DECORATIVE:** Acrylic diffuser
- INSTALLATION:** Precision Lock Collar included with Flanged or Micro Flange Trim and Flangeless Mud or Wood Kit


Standard Micro Flange

X2TRDSWHMF

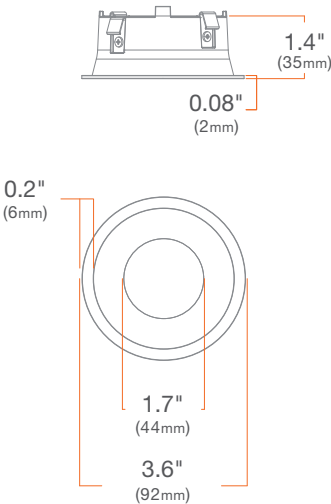


Standard Flangeless

X2TRDSWHFL

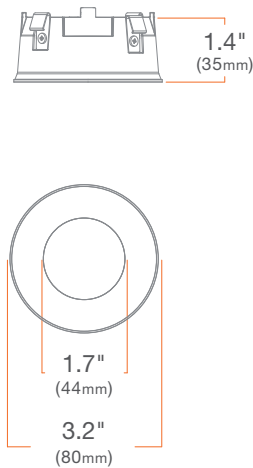


Wall Wash Micro Flange

X2TRDWWHMF

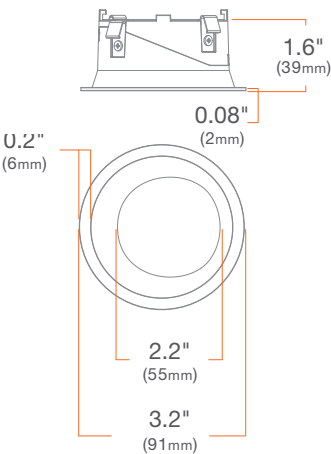

Wall Wash Flangeless


X2TRDWWHFL

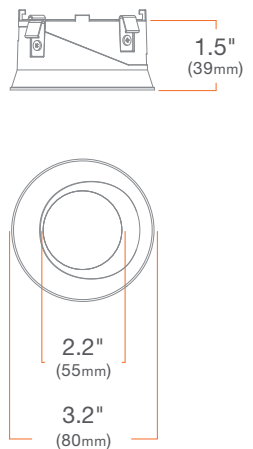





### Pinhole

X2TRDPWH

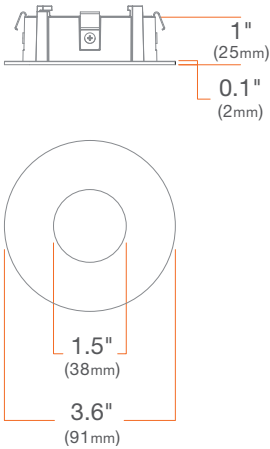


### Pinhole Flangeless

X2TRDPWHFL

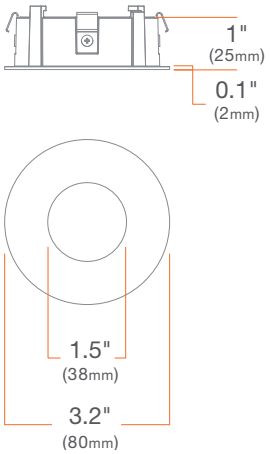


### Hyperbolic

X2TRDHW

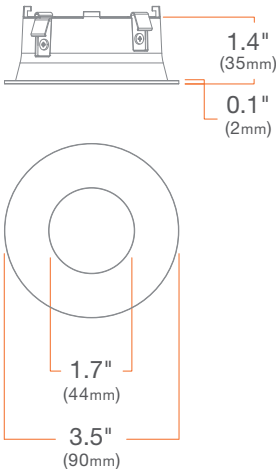

### Hyperbolic Flangeless

X2TRDHWFL

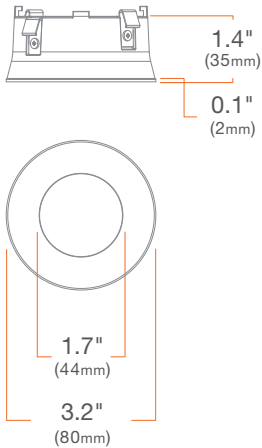

ACCESSORIES




Flangeless Mud Kit

X2KRMUD

**SUMMARY:** Flangeless Mud Kit (Required for New Construction installation of Flangeless Trim in drywall ceiling)


**CEILING:** 1/2" up to 1 1/4"

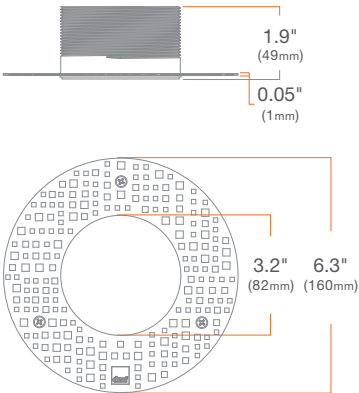

Router Template

X2KRTEMPLATE

**SUMMARY:** Router Template (Recommended for routing 3 3/16" [81mm] cutout in wood ceiling)

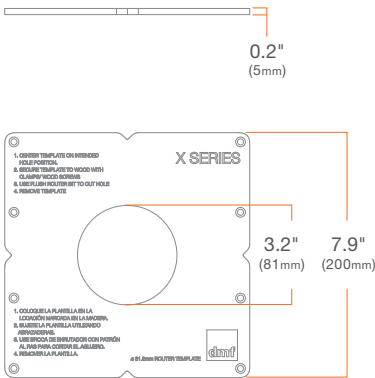


Extension Collar

X2CREXT

**SUMMARY:** Extension Collar for drywall ceiling with flanged trims

**CEILING:** 1/2" up to 3"

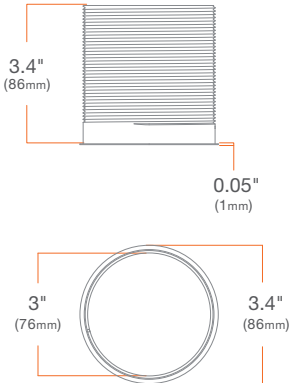

ACCESSORIES





Wood Kit

X2KRWOOD

**SUMMARY:** Wood Kit (Required for New Construction installation in wood ceiling. Must be mounted on wood before installation to ceiling.)

**CEILING:** 1/2" up to 1"





Wood Extension Collar

X2KRWOODXL

**SUMMARY:** Extension Collar for wood ceiling (Must be mounted on the wood prior to ceiling installation.)

**CEILING:** 1/2" up to 3"




PHOTOMETRY

1000 lm, Tunable White (4000K-1800K), Spot **ART2D-10TT1SPX**

2" Standard Micro Flange Trim, White **X2TRDSWHMF**

Candela Distribution

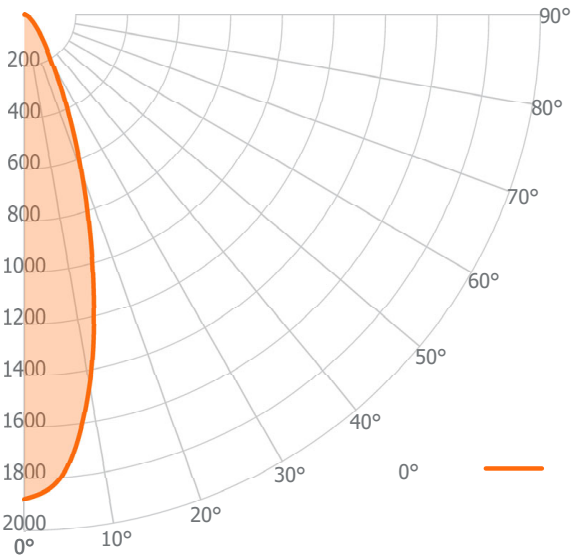

Luminous Intensity

|     | 0°   |
|-----|------|
| 0°  | 1878 |
| 5°  | 1783 |
| 10° | 1459 |
| 15° | 1029 |
| 20° | 651  |
| 25° | 387  |
| 30° | 221  |
| 35° | 143  |
| 40° | 95   |
| 45° | 65   |
| 50° | 46   |
| 55° | 32   |
| 60° | 25   |
| 65° | 19   |
| 70° | 14   |
| 75° | 10   |
| 80° | 6    |
| 85° | 3    |
| 90° | 1    |

Zonal Lumen Summary

| Zone      | Lumens | Luminaire % |
|-----------|--------|-------------|
| 0° - 30°  | 623    | 75%         |
| 0° - 40°  | 715    | 86%         |
| 0° - 60°  | 797    | 96%         |
| 0° - 90°  | 830    | 100%        |
| 0° - 180° | 830    | 100%        |

Illuminance Chart


| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3 ft              | 208.7 fc     | 1.7 ft   |
| 6 ft              | 52.2 fc      | 3.5 ft   |
| 9 ft              | 23.2 fc      | 5.2 ft   |
| 12 ft             | 13.0 fc      | 7.0 ft   |

Input Watts: **14.0 W**  
 Lumens: **830 lm**  
 Efficacy: **59 lm/W**  
 Beam Angle: **32°**

1000 lm, Tunable White (4000K-1800K), Flood **ART2D-10TT1FLX**

2" Standard Micro Flange Trim, White **X2TRDSWHMF**

Candela Distribution

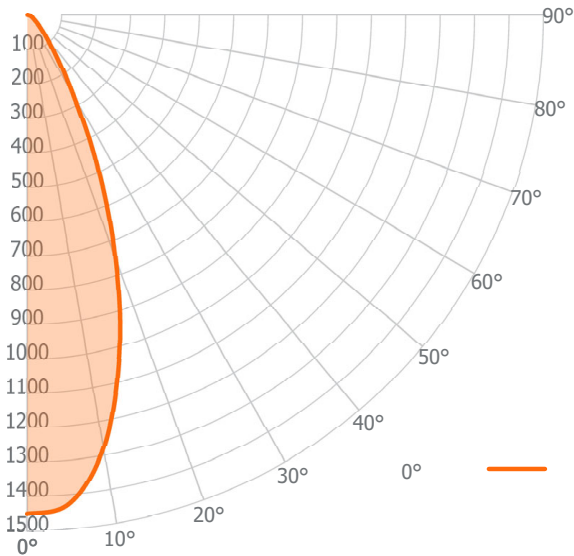

Luminous Intensity

|     | 0°   |
|-----|------|
| 0°  | 1451 |
| 5°  | 1425 |
| 10° | 1279 |
| 15° | 1034 |
| 20° | 752  |
| 25° | 481  |
| 30° | 269  |
| 35° | 152  |
| 40° | 91   |
| 45° | 58   |
| 50° | 39   |
| 55° | 26   |
| 60° | 20   |
| 65° | 16   |
| 70° | 12   |
| 75° | 8    |
| 80° | 5    |
| 85° | 3    |
| 90° | 1    |

Zonal Lumen Summary

| Zone      | Lumens | Luminaire % |
|-----------|--------|-------------|
| 0° - 30°  | 634    | 76%         |
| 0° - 40°  | 735    | 88%         |
| 0° - 60°  | 807    | 97%         |
| 0° - 90°  | 834    | 100%        |
| 0° - 180° | 834    | 100%        |

Illuminance Chart


| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3 ft              | 161.2 fc     | 2.2 ft   |
| 6 ft              | 40.3 fc      | 4.5 ft   |
| 9 ft              | 17.9 fc      | 6.7 ft   |
| 12 ft             | 10.1 fc      | 9.0 ft   |

Input Watts: **14.0 W**  
 Lumens: **834 lm**  
 Efficacy: **60 lm/W**  
 Beam Angle: **41°**

PHOTOMETRY

1000 lm, Tunable White (4000K-1800K), Wide Flood ART2D-10TT1WFX  
 2" Standard Micro Flange Trim, White X2TRDSWHMF

Candela Distribution

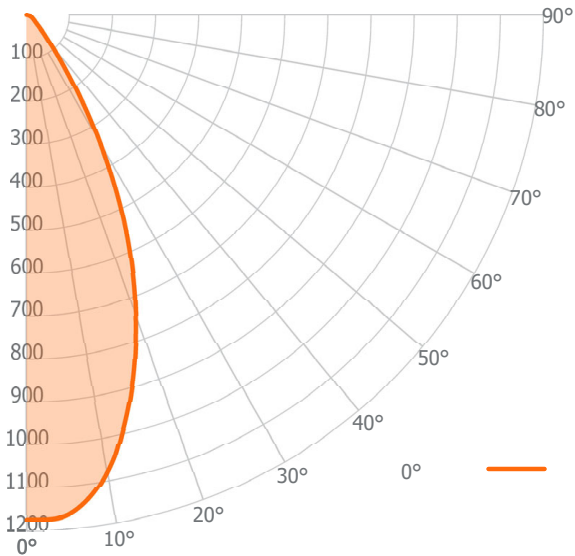

Luminous Intensity

|     | 0°   |
|-----|------|
| 0°  | 1175 |
| 5°  | 1165 |
| 10° | 1081 |
| 15° | 927  |
| 20° | 743  |
| 25° | 545  |
| 30° | 342  |
| 35° | 177  |
| 40° | 91   |
| 45° | 52   |
| 50° | 32   |
| 55° | 23   |
| 60° | 19   |
| 65° | 15   |
| 70° | 11   |
| 75° | 8    |
| 80° | 5    |
| 85° | 3    |
| 90° | 1    |

Zonal Lumen Summary

| Zone      | Lumens | Luminaire % |
|-----------|--------|-------------|
| 0° - 30°  | 609    | 74%         |
| 0° - 40°  | 728    | 89%         |
| 0° - 60°  | 793    | 97%         |
| 0° - 90°  | 819    | 100%        |
| 0° - 180° | 819    | 100%        |


Illuminance Chart

| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3 ft              | 130.6 fc     | 2.7 ft   |
| 6 ft              | 32.6 fc      | 5.3 ft   |
| 9 ft              | 14.5 fc      | 8.0 ft   |
| 12 ft             | 8.2 fc       | 10.6 ft  |

Input Watts: 14.0 W  
 Lumens: 819 lm  
 Efficacy: 59 lm/W  
 Beam Angle: 48°

1000 lm, Tunable White (4000K-1800K), Linear Spread ART2D-10TT1LSX  
 2" Standard Micro Flange Trim, White X2TRDSWHMF

Candela Distribution

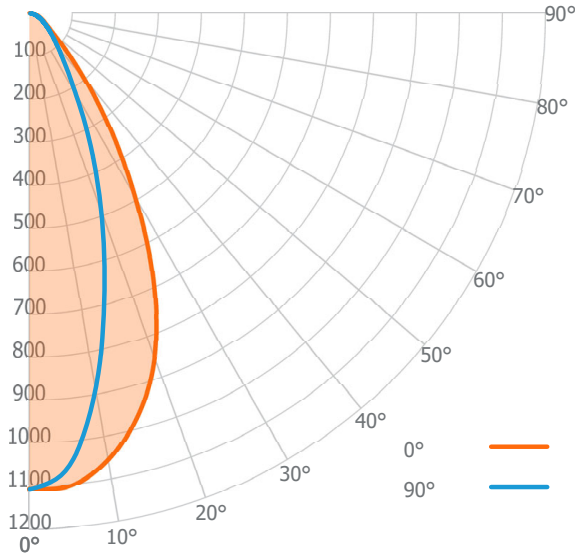

Luminous Intensity

|     | 0°   |
|-----|------|
| 0°  | 1109 |
| 5°  | 1104 |
| 10° | 1056 |
| 15° | 972  |
| 20° | 853  |
| 25° | 683  |
| 30° | 492  |
| 35° | 329  |
| 40° | 201  |
| 45° | 119  |
| 50° | 74   |
| 55° | 51   |
| 60° | 39   |
| 65° | 30   |
| 70° | 22   |
| 75° | 15   |
| 80° | 9    |
| 85° | 4    |
| 90° | 1    |

Zonal Lumen Summary

| Zone      | Lumens | Luminaire % |
|-----------|--------|-------------|
| 0° - 30°  | 523    | 66%         |
| 0° - 40°  | 653    | 82%         |
| 0° - 60°  | 755    | 95%         |
| 0° - 90°  | 796    | 100%        |
| 0° - 180° | 796    | 100%        |

Illuminance Chart

| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3 ft              | 123.2 fc     | 3.2 ft   |
| 6 ft              | 30.8 fc      | 6.5 ft   |
| 9 ft              | 13.7 fc      | 9.7 ft   |
| 12 ft             | 7.7 fc       | 13.0 ft  |

Input Watts: 14.0 W  
 Lumens: 796 lm  
 Efficacy: 57 lm/W  
 Beam Angle: 57° x 36°