

Project:	Type:
Product Code:	Date:

V021026



Artafex 2" Square Downlight

SMALL APERTURE Delivers the ultimate in quiet ceiling designs

PRECISION LOCK COLLAR Eliminates over-cutting and ensures perfect cutout

ARCHITECTURE-GRADE Deep die-cast aluminum knife edge trim provide unmatched precision and exceptionally easy installation

DIMMING COMPATIBILITY GUARANTEED In-house designed integrated driver ensures seamless compatibility with every major lighting control system

INSTALLATION

Ceiling Thickness

New Construction: 1/2" up to 1 1/4"

Remodel, Digital Modules: 1/2" up to 1 1/4"

Ceiling Material

Drywall, Millwork, Acoustic Ceiling Tiles

TRIMS

Style

Standard Micro Flange, Flangeless, Wall Wash, Pinhole

Finish

White, Black, Bronze, Clear Diffuse, Custom Color (RAL Colors)

Premium Metalized Finish

Brass, Copper, Graphite

LIGHT OUTPUT & DISTRIBUTION

Module

Downlight

Lumens (Power)

1000 lm (14.5W)

Color Quality

True Spectrum®

Color Temperature

 Tunable White (4000K–1800K)

Beam Spread

 30° Spot

 40° Flood

 50° x 30° Linear Spread

 50° Wide Flood

POWER & CONTROLS

Input Voltage

120V

Dimming

PhaseX (0.1%)

RATINGS & CERTIFICATIONS

 IC (Insulation Contact) Rated

 ASTM E283 Certified Air Tight

 Chicago Plenum

 UL Listed for Wet Location ¹

 RoHS Compliant

 NSF Listed ²

¹ Flanged Trims Only, under covered area Only

² White and Black Finish Only

WARRANTY

10 year limited warranty; 50,000 hours



PRODUCT BUILDER

SQUARE HOUSING

EXAMPLE: X2NCS

PRODUCT CODE		INSTALLATION		SHAPE	
X2				S	
X2	2" Housing	NC	New Construction	S	Square
		CP	Chicago Plenum		
		RD	Remodel, Digital Modules (DALI/PhaseX)		

GATEWAY

EXAMPLE: ART-GWX

PRODUCT CODE	
ART-GWX	
ART-GWX	DMX Input

MODULE

EXAMPLE: ART2D10TT1SPX

PRODUCT CODE		LUMENS		COLORMETRIC		CCT		BEAM SPREAD		DIMMING	
ART2D		10		T		T1				X	
ART2D	Downlight	10	1000 lm	T	True Spectrum®	T1	Tunable White (4000K - 1800K)	SP	Spot (30°)	X	PhaseX
								FL	Flood (40°)		
								WF	Wide Flood (50°)		
								LS	Linear Spread (50°x30°)		

SQUARE TRIM

EXAMPLE: X2TSDSWHMF

PRODUCT CODE		FINISH		OPTION	
X2TSDS	2" Standard	WH	White	[Blank]	(Wall Wash and Pinhole Only)
X2TSDW	2" Wall Wash ¹	BK	Black	MF	Micro Flange
X2TSDP	2" Pinhole ²	BZ	Bronze	FL	Flangeless ⁵
		CW	Clear Diffuse, White Flange ³		
		CC	Custom (RAL Colors)		
		PREMIUM METALIZED FINISH			
		BR	Brass ⁴		
		CO	Copper ⁴		
		GR	Graphite ⁴		

¹ Recommended with Wide Flood beam spread² Only available in White or Black finish; Not available in Micro Flange option³ Only available in Standard Micro Flange option⁴ Only available in Standard style⁵ Not available in Clear Diffuse finish; Requires Flangeless Mud or Wood Kit in New Construction housings

PRODUCT BUILDER

OPTICS



XDOP	Bundled Downlight Optics Kit <i>(Includes Spot, Flood, Wide Flood and Linear Spread)</i>
XDSP	Spot (30°) Optic
XDFL	Flood (40°) Optic
DXWF	Wide Flood (50°) Optic
DXLS	Linear Spread (50°x30°) Optic
DXHD	High Diffusion Front Lens <i>(Can be paired with all beam spreads to provide extra diffusion; Only available as an optical accessory)</i>
DXCD	Clear Front Lens <i>(Can be paired with all beam spreads to decrease diffusion and define edges; Only available as an optical accessory)</i>

ACCESSORIES

X2SMUD	Flangeless Mud Kit <i>(Required for New Construction installation of Flangeless Trim in drywall ceiling)</i>
X2SWOOD	Wood Kit <i>(Required for New Construction installation in wood ceiling)</i>
X2KSTEMPLATE	Router Template <i>(Recommended for routing 3 1/4" [82mm] cutout in wood ceiling)</i>
X2KSRETRO6	6" to 2" Retrofit Conversion Kit <i>(Requires drywall plaster to upgrade an existing fixture from 6" to 2")</i> ¹

¹ For more detailed Information, please refer to [Retrofit Conversion Kits spec sheet](#)

GATEWAY

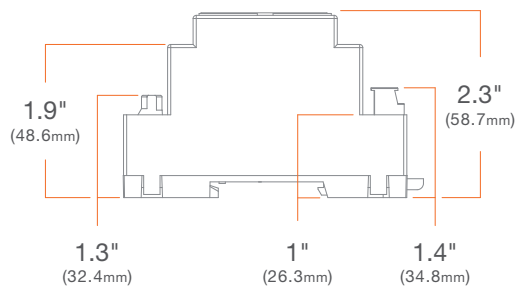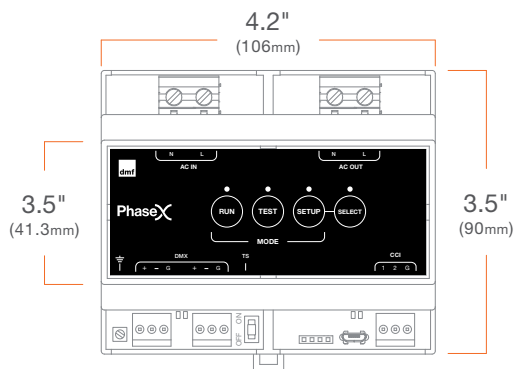DMX Input **ART-GWX**

SUMMARY

The ART-GWX is a Gateway for use with Artafex PhaseX enabled fixtures. It provides full control of up to 64 PhaseX lighting fixtures connected over standard electrical wiring. The ART-GWX interfaces to lighting control systems using the industry standard DMX/RDM protocol unlocking the benefits of digital control and tunable white lighting.

FEATURES:

- Digital control of up to 64 fixtures over standard AC wiring
- Ultra reliable, 2-way communication
- Integration using DMX/RDM protocol
- Direct Integration to Crestron Home via DMX-C
(Requires DIN-GWDL Gateway from Crestron)

ELECTRICAL RATINGS:

- Input Voltage: 120VAC, 60Hz
- Max Output Current: 8A

ELECTRICAL CONNECTIONS

- AC Input: Screw terminals for AC Line and Neutral. Max 12 AWG wire.
- AC Output Terminal: Screw terminals for AC Line Out and Neutral Out. Max 12 AWG wire.
- DMX Input: (2) 3-position pluggable terminal block. (DMX+, DMX-, G)
- USB: Micro-USB connection for use with PhaseX Commissioning Utility
- Contact Closure: 2 x contact closure inputs. (CCI1, CC2, G)
(Reserved for future use)

ENVIRONMENTAL: 32 – 104°F (0 – 40°C)


ENCLOSURE:

- DIN Rail mount
- Black ABS plastic

COMPLIANCE:

- UL508, UL8750
- For installation within an electrical enclosure

MODULE

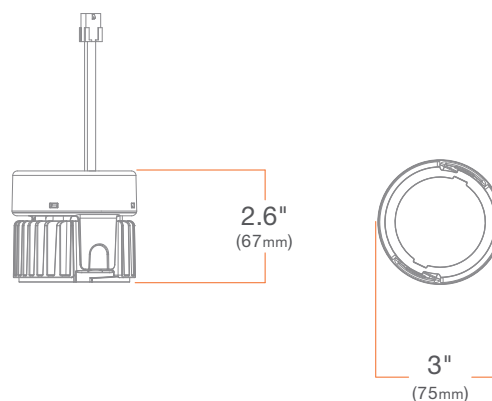

SUMMARY

TUNABLE WHITE




CCT	4000K - 1800K
LUMENS (POWER)	1000 lm (14.5W)
EFFICACY	70 lm/W
WIDTH FOR WOOD COLLAR	4 3/4"
COLOR QUALITY	True Spectrum® 93 CRI, 3-step SDCM
BEAM SPREAD	Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50° x 30°)
DIMMING	PhaseX
LED CHIP	Bridgelux
LISTINGS	ENERGY STAR® qualified ¹ , California Title 24 2019–2022 JA8-E compliant, UL Listed for Wet Location ² , UL Certified US-CA, Declare, RoHS compliant, NSF/ANSI 2 Listed ³

¹ Refer to ENERGY STAR Certified light fixtures database² With flanged trims, under covered areas only³ In accordance to NSF/ANSI 2 for Splash Zone having designated trim finishes

ADDITIONAL

INPUT VOLTAGE: 120V, 60Hz**MAX INPUT CURRENT (120V):** 0.13 amps**CONNECTOR:** 6-pin Molex**POWER FACTOR:** Greater than 0.9**TOTAL HARMONIC DISTORTION:** Less than 20%**AMBIENT OPERATING TEMPERATURE:** -20°C to 40°C**WARRANTY:** 10 year limited warranty; 50,000 hours at 70% lumen maintenance

HOUSING

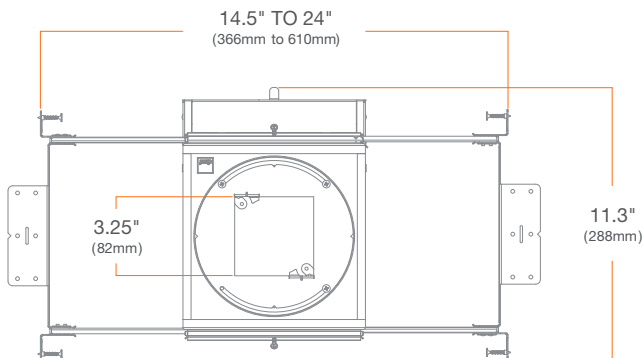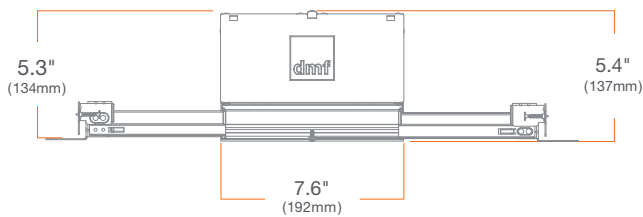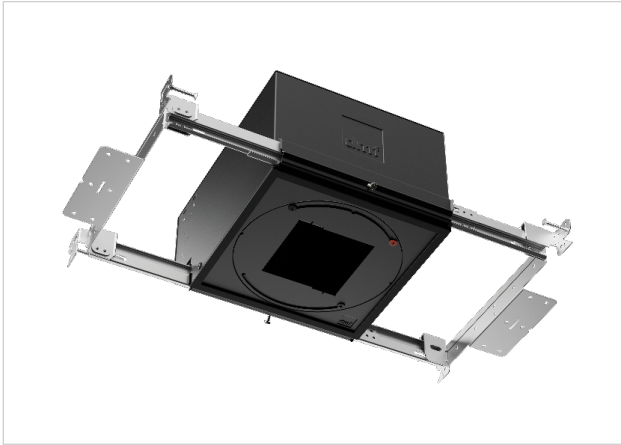

New Construction **X2NCS** Chicago Plenum **X2CPS**

SUMMARY

JUNCTION BOX: Equipped with 10 knockouts: four 1/4" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Adjustable Bar Hangers for 14 1/2" to 24" joist spacing, when bar hangers are broken down, up to 10.5" of joist spacing. Compatible with traditional joists, Armstrong TM ceiling, Hat Channel and T-Bar. Vertical adjustment (1/2"-1 1/4") through installation of the square collar.

CEILING: 1/2" up to 1 1/4"

CUTOUT: 3 1/4" (82mm) square opening

LISTINGS: Chicago Plenum, ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims or hex louver.

HOUSING



Remodel, Digital Modules (DALI/PhaseX)

X2RDS


SUMMARY

JUNCTION BOX: Equipped with four knockouts: two 1/2" trade size knockouts and two romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.

CEILING:

- Drywall: 1/2" - 1 1/4" (12mm-32mm)
- Wood Ceiling: 1/2" - 1" (12mm-25mm)
- Acoustic Ceiling Tiles: 5/8" - 1 1/4" (16mm-32mm)

CUTOUT: 3 1/4" (82mm) round opening

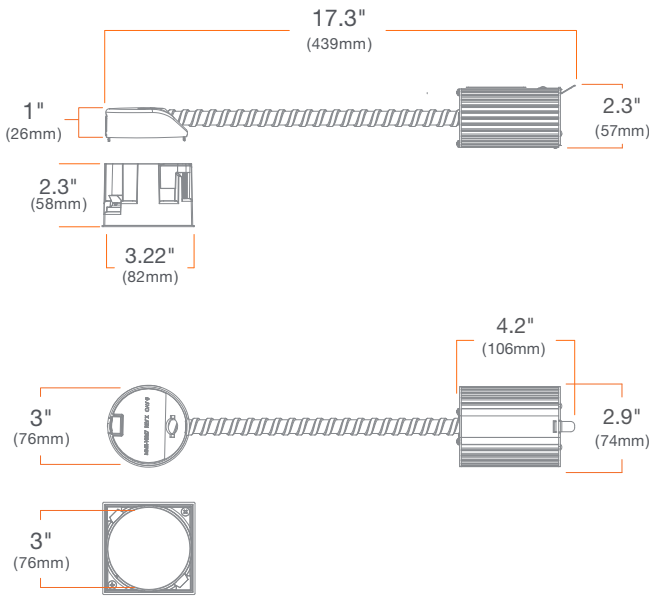

Total Height in Plenum



TRIMS




SUMMARY

- CONSTRUCTION:** Die-cast aluminum
- FINISH:** Wet paint
- DECORATIVE:** Acrylic diffuser
- INSTALLATION:** Precision Lock Collar included with Micro Flange Trim and Flangeless Mud or Wood Kit


Standard Micro Flange

X2TSDSWHMF

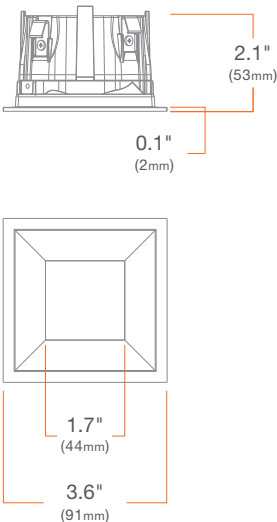


Standard Flangeless

X2TSDSWHFL

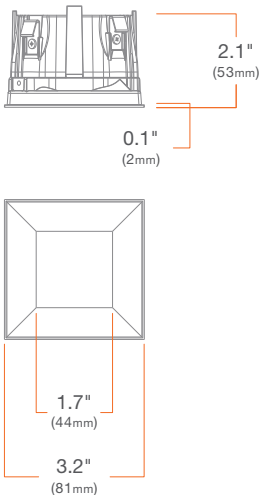


Wall Wash Micro Flange

X2TSDWWHMF

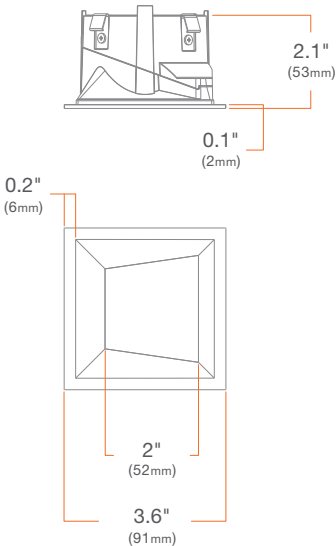


Wall Wash Flangeless

X2TSDWWHFL

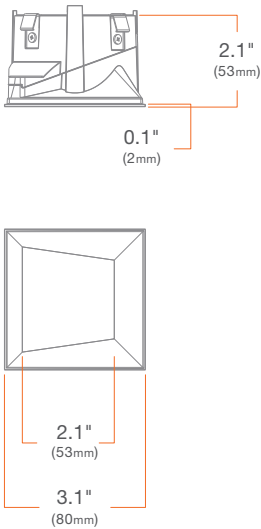


Pinhole

X2TSDPWH

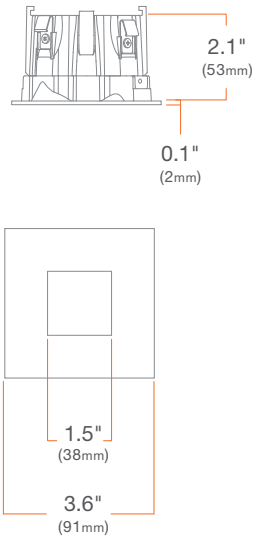

Pinhole Flangeless

X2TSDPWHFL

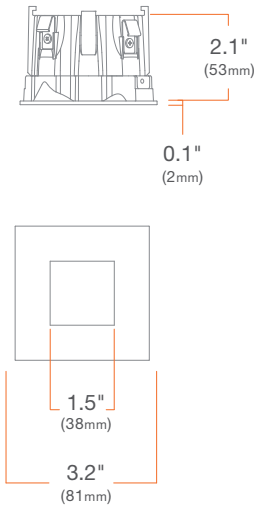

ACCESSORIES




Flangeless Mud Kit

X2KSMUD

SUMMARY: Flangeless Mud Kit (Required for New Construction installation of Flangeless Trim in drywall ceiling)

CEILING: 1/2" up to 1 1/4"

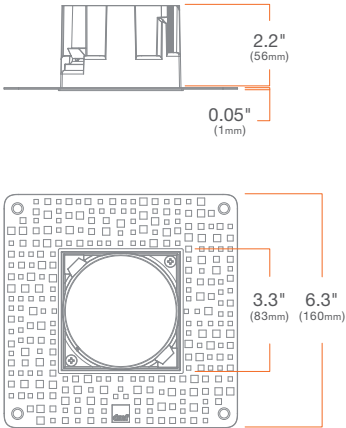


Wood Kit

X2KSWOOD

SUMMARY: Wood Kit (Required for New Construction installation of all trims in wood ceiling. Must be mounted to wood prior to ceiling installation.)


CEILING: 1/2" up to 1"

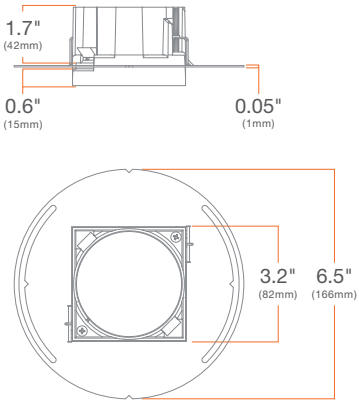

Router Template

X2KSTEMPLATE


SUMMARY: Router Template (Recommended for routing 3 1/4" [82mm] cutout in wood ceiling)

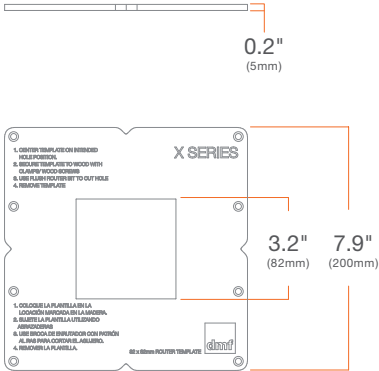

PHOTOMETRY

1000 lm, Tunable White (4000K-1800K), Spot **ART2D-10TT1SPX**
 2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

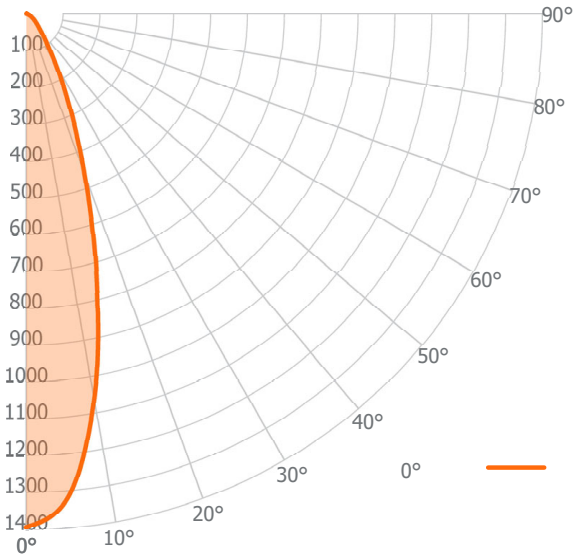

Luminous Intensity

	0°
0°	1393
5°	1316
10°	1063
15°	737
20°	462
25°	277
30°	162
35°	96
40°	62
45°	43
50°	32
55°	23
60°	16
65°	11
70°	6
75°	3
80°	2
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	450	77%
0° - 40°	513	88%
0° - 60°	569	97%
0° - 90°	584	100%
0° - 180°	584	100%


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	154.8 fc	1.7 ft
6 ft	38.7 fc	3.4 ft
9 ft	17.2 fc	5.1 ft
12 ft	9.7 fc	6.8 ft

Input Watts: **14.0 W**
 Lumens: **584 lm**
 Efficacy: **42 lm/W**
 Beam Angle: **31°**

1000 lm, Tunable White (4000K-1800K), Flood **ART2D-10TT1FLX**
 2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

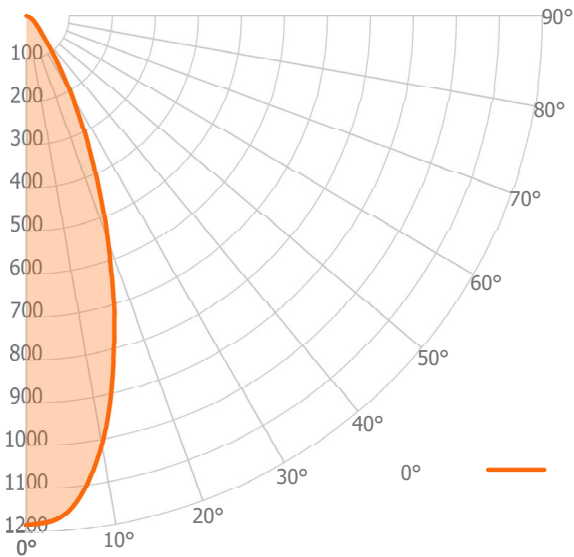

Luminous Intensity

	0°
0°	1184
5°	1155
10°	1013
15°	790
20°	556
25°	355
30°	208
35°	116
40°	67
45°	43
50°	30
55°	21
60°	15
65°	10
70°	6
75°	3
80°	2
85°	1
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	486	77%
0° - 40°	562	89%
0° - 60°	616	98%
0° - 90°	631	100%
0° - 180°	631	100%

Illuminance Chart


Distance from LED	Foot Candles	Diameter
3 ft	131.6 fc	2.1 ft
6 ft	32.9 fc	4.2 ft
9 ft	14.6 fc	6.3 ft
12 ft	8.2 fc	8.4 ft

Input Watts: **14.0 W**
 Lumens: **631 lm**
 Efficacy: **45 lm/W**
 Beam Angle: **38°**

PHOTOMETRY

1000 lm, Tunable White (4000K-1800K), Wide Flood **ART2D-10TT1WFX**
 2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

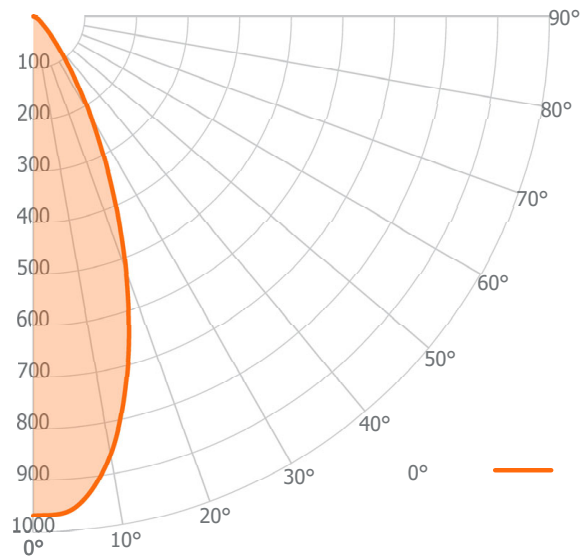

Luminous Intensity

	0°
0°	967
5°	954
10°	863
15°	706
20°	525
25°	354
30°	221
35°	128
40°	73
45°	43
50°	25
55°	18
60°	12
65°	8
70°	4
75°	2
80°	2
85°	1
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	444	75%
0° - 40°	528	89%
0° - 60°	579	98%
0° - 90°	591	100%
0° - 180°	591	100%


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	107.5 fc	2.3 ft
6 ft	26.9 fc	4.7 ft
9 ft	11.9 fc	7.0 ft
12 ft	6.7 fc	9.3 ft

Input Watts: **14.0 W**
 Lumens: **591 lm**
 Efficacy: **42 lm/W**
 Beam Angle: **42°**

1000 lm, Tunable White (4000K-1800K), Linear Spread **ART2D-10TT1LSX**
 2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

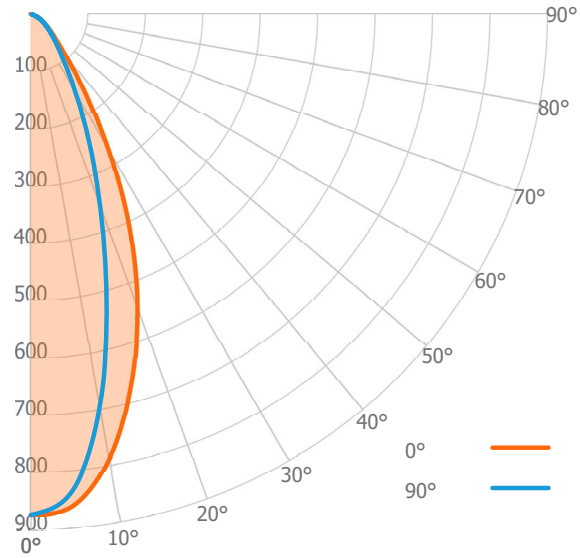

Luminous Intensity

	0°
0°	875
5°	861
10°	789
15°	675
20°	545
25°	408
30°	272
35°	164
40°	99
45°	65
50°	45
55°	32
60°	22
65°	14
70°	8
75°	4
80°	3
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	360	70%
0° - 40°	434	85%
0° - 60°	495	97%
0° - 90°	512	100%
0° - 180°	512	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	97.2 fc	2.7 ft
6 ft	24.3 fc	5.3 ft
9 ft	10.8 fc	8.0 ft
12 ft	6.1 fc	10.6 ft

Input Watts: **14.0 W**
 Lumens: **512 lm**
 Efficacy: **37 lm/W**
 Beam Angle: **48° x 34°**