

Project:	Type:
Product Code:	Date:

V022626



2" Retrofit Conversion Kits

SMALL APERTURE Delivers the ultimate in quiet ceiling designs by converting existing 4", 5", or 6" housings to 2" fixtures

PRECISION LOCK COLLAR Ensures flush and secure fit

ARCHITECTURE-GRADE Deep die-cast aluminum knife edge trim provide unmatched precision and performance

DIMMING COMPATIBILITY GUARANTEED
 Bespoke integrated driver ensures seamless compatibility with every major lighting control system

INSTALLATION

Application *

- Retrofit:
- 6" to 2" Round Conversion
- 4" or 5" to 2" Round Conversion
- 6" to 2" Square Conversion

* Can be used in an existing housing having min volume 50 cubic inch or larger. Minimum housing depth required for installation is 5"

Ceiling Material

Drywall

TRIMS

Style

Standard Micro Flange, Flangeless, Hyperbolic

Finish

White, Black, Bronze, Clear Diffuse

Premium Metalized Finish

Brass, Copper, Graphite

LIGHT OUTPUT & DISTRIBUTION

Module

Downlight

Lumens (Power)

750 lm (9.5W), 1000 lm (12.5W)

Color Quality

True Spectrum®

Color Temperature

- 2700K
- 3000K
- 3500K
- 4000K
- Warm Dim (3000K–1800K)

Beam Spread

- 20° Narrow Spot
- 30° Spot
- 40° Flood
- 50° Wide Flood
- 50° x 30° Linear Spread

POWER & CONTROLS

Input Voltage

120 / 277V

Dimming

TRIAC/ELV (1%, 120V only)

RATINGS & CERTIFICATIONS

- UL Listed for Wet Location ¹
- RoHS Compliant
- NSF Listed ²
- DarkSky Approved ³

¹ Flanged Trims, Under Covered Areas Only

² White and Black Finish Only

³ Downlight only, CCT less than or equal to 3000K, non-decorative trims only

WARRANTY

10 year limited warranty; 50,000 hours



PRODUCT BUILDER

MODULE

PRODUCT CODE		LUMENS		COLORMETRIC		CCT		BEAM SPREAD		DIMMING	
ART2D				T						T	
ART2D	Downlight	07	750 lm	T	True Spectrum®	27	2700K	NS	Narrow Spot (20°)	T	TRIAC/ELV
		10	1000 lm			30	3000K	SP	Spot (30°)		
						35	3500K	FL	Flood (40°)		
						40	4000K	WF	Wide Flood (50°)		
						3W	Warm Dim (3000K–1800K) ¹	LS	Linear Spread (50°x30°)		

¹ Only available in 1000 lm; Not available in Narrow Spot beam spread

ROUND RETROFIT KIT

PRODUCT CODE	
X2KRRETRO6	Retrofit Kit - 6" to 2" Round Conversion ²
X2KRRETRO45	Retrofit Kit - 4" or 5" to 2" Round Conversion ²

² Only for usage with Round trim

³ Only for usage with Square trim

SQUARE RETROFIT KIT

PRODUCT CODE	
X2KSRETRO6	
X2KSRETRO6	Retrofit Kit - 6" to 2" Square Conversion ³

ROUND TRIM

PRODUCT CODE		FINISH		OPTION	
X2TRDS	2" Round Standard Trim ⁴	WH	White	[Blank]	Flanged (Hyperbolic Only)
X2TRDH	2" Round Hyperbolic Trim ⁵	BK	Black	MF	Micro Flange
		BZ	Bronze	FL	Flangeless ⁸
		CW	Clear Diffuse, White Flange ⁶		
		PREMIUM METALIZED FINISH			
		BR	Brass ⁷		
		CO	Copper ⁷		
		GR	Graphite ⁷		

SQUARE TRIM

PRODUCT CODE		FINISH		OPTION	
X2TSDS					
X2TSDS	2" Square Standard Trim	WH	White	MF	Micro Flange
		BK	Black	FL	Flangeless ⁸
		BZ	Bronze		
		CW	Clear Diffuse, White Flange ⁶		
		PREMIUM METALIZED FINISH			
		BR	Brass ⁷		
		CO	Copper ⁷		
		GR	Graphite ⁷		

⁴ Only available in Micro Flange and Flangeless option

⁵ Not available in Micro Flange; Not available in Bronze or Clear Diffuse finish

⁶ Only available in Micro Flange option

⁷ Only available in Standard style

⁸ Not available in Clear Diffuse finish



PRODUCT BUILDER

OPTICAL ACCESSORIES

DXOP	Bundled Downlight Optics Kit <i>(Includes Narrow Spot, Spot, Flood, Wide Flood and Linear Spread)</i>
DXNS	Narrow Spot (20°) Optic
DXSP	Spot (30°) Optic
DXFL	Flood (40°) Optic
DXWF	Wide Flood (50°) Optic
DXLS	Linear Spread (50°x30°) Optic


ADAPTERS

CBL-10043	Edison to 6-Pin Molex (included with conversion kits)
CBL-10023	Ideal to Molex Adapter
DRD2X-QCM-GU	GU-24 Adapter ⁸
DRD2X-QCM-M	Male IDEAL PowerPlug [®] Adapter ⁸

⁸ Optional, must be purchased separately; Requires Molex to Ideal adapter for compatibility



MODULE

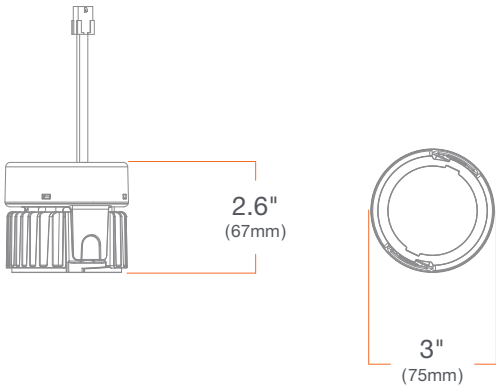

SUMMARY

	STATIC CCT	WARM DIM
CCT	2700K, 3000K, 3500K, 4000K	3000K - 1800K
LUMENS (POWER)	750 lm (9.5W), 1000 lm (12.5W)	1000 lm (12.5W)
EFFICACY	79 lm/W, 80 lm/W	80 lm/W
COLOR QUALITY	True Spectrum® 98 CRI, 2-step SDCM	True Spectrum® 93 CRI, 2-step SDCM
BEAM SPREAD	Narrow Spot (20°), Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50°x30°)	Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50°x30°)
DIMMING	TRIAC/ELV	TRIAC/ELV
LED CHIP	Cree	Bridgelux
LISTINGS	ENERGY STAR® qualified ¹ , California Title 24 2019–2022 JA8-E Compliant, UL Listed for Wet Location ² , UL Certified US-CA, Declare, RoHS compliant, NSF/ANSI 2 Listed ³ , Dark Sky Sompliant ⁴	

¹ Refer to ENERGY STAR Certified light fixtures database

² With Flanged trims, under covered areas only

³ In accordance to NSF/ANSI 2 for Splash Zone having designated trim finishes

⁴ Only applicable to CCT options less than or equal to 3000K and not compatible with decorative trims



ADDITIONAL

INPUT VOLTAGE: 120/277V, 50/60Hz	TOTAL HARMONIC DISTORTION: Less than 20%
MAX INPUT CURRENT (120V): 0.13 amps	AMBIENT OPERATING TEMPERATURE: -20°C to 40°C
MAX INPUT CURRENT (277V): 0.06 amps	WARRANTY: 10 year limited warranty; 50,000 hours at 70% lumen maintenance
CONNECTOR: 6-pin Molex	
POWER FACTOR: Greater than 0.9	

RETROFIT KITS



6" to 2" Round Conversion

X2KRRETRO6

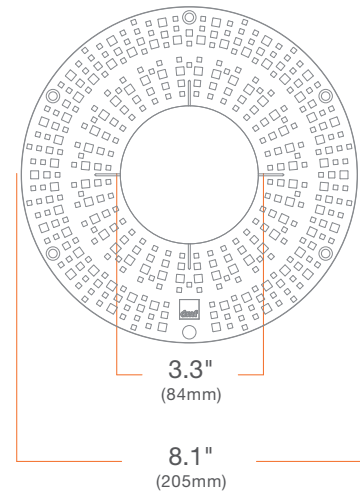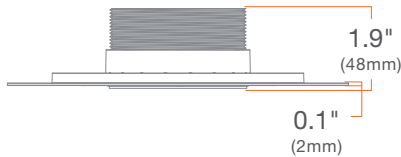



4" or 5" to 2" Round Conversion

X2KRRETRO45

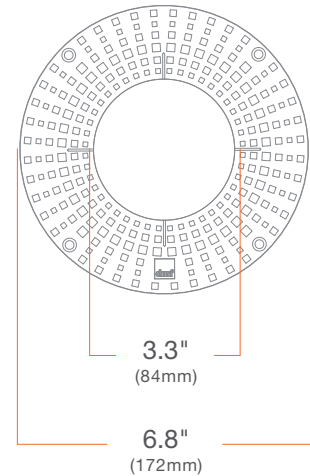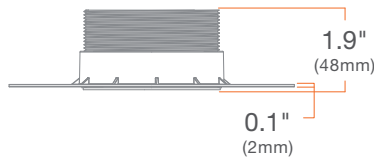

6" to 2" Square Conversion

X2KSRETRO6

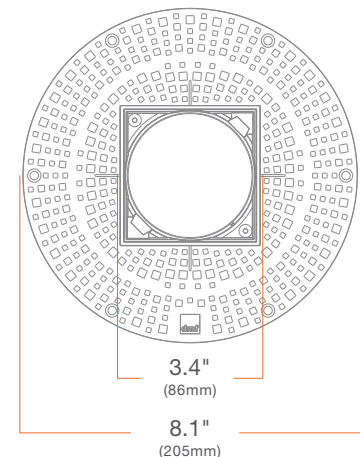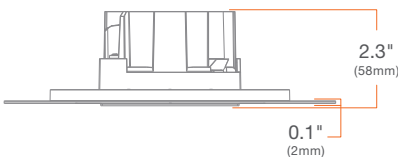

ROUND TRIMS



SUMMARY

CONSTRUCTION: Die-cast aluminum


FINISH: Wet paint

INSTALLATION: Precision Lock Collar included

WARRANTY: 1 year limited warranty


Standard Micro Flange

X2TRDSWHMF

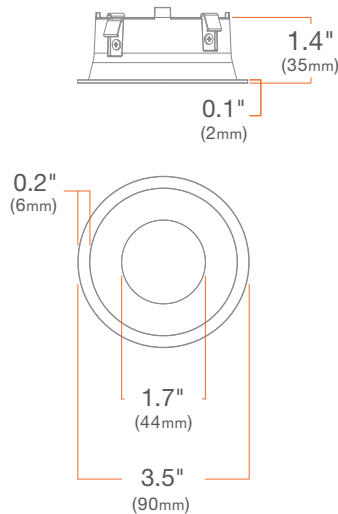


Standard Flangeless

X2TRDSWHFL

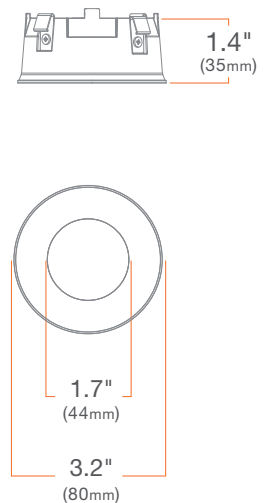


Hyperbolic

X2TRDHW

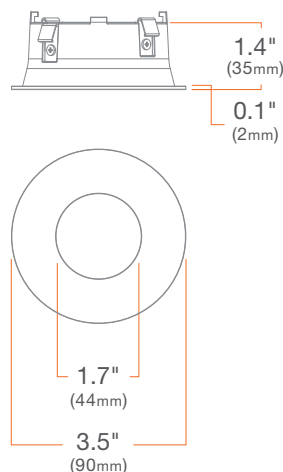

Hyperbolic Flangeless

X2TRDHWFL

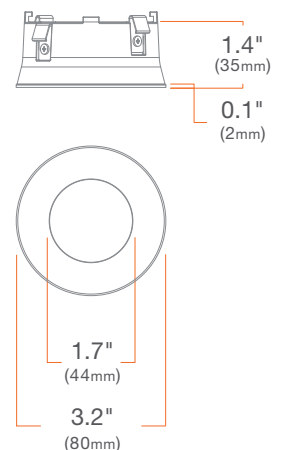

SQUARE TRIMS



SUMMARY

CONSTRUCTION: Die-cast aluminum



FINISH: Wet paint

INSTALLATION: Precision Lock Collar included with Micro Flange Trim and Flangeless

WARRANTY: 1 year limited warranty



Standard Micro Flange

X2TSDSWHMF



Standard Flangeless


X2TSDSWHFL



PHOTOMETRY - ROUND TRIM

1000 lm, 3000K, Narrow Spot **ART2D-10T30NST**2" Standard Micro Flange Trim, White **X2TRDSWHMF**

Candela Distribution

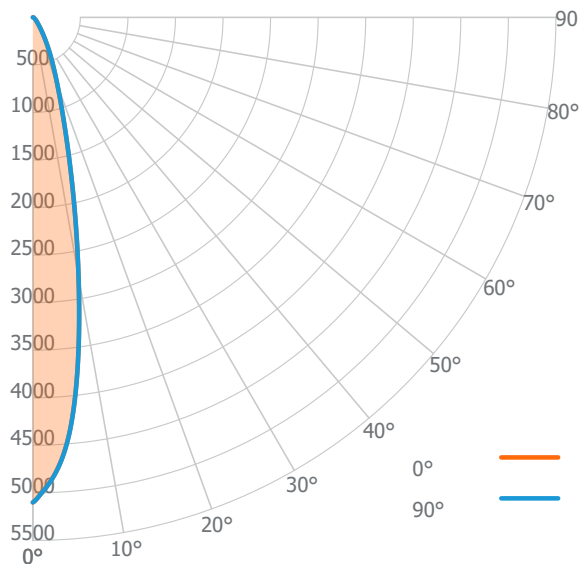

Luminous Intensity

	0°
0°	5100
5°	4394
10°	2768
15°	1418
20°	752
25°	432
30°	240
35°	133
40°	79
45°	53
50°	38
55°	27
60°	21
65°	16
70°	12
75°	9
80°	6
85°	3
90°	1

Zonal Lumen Summary


Zone	Lumens	Luminaire %
0° - 30°	917	86%
0° - 40°	991	92%
0° - 60°	1047	98%
0° - 90°	1072	100%
0° - 180°	1072	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	566.7 fc	1.1 ft
6 ft	141.7 fc	2.3 ft
9 ft	63.0 fc	3.4 ft
12 ft	35.4 fc	4.5 ft

Input Watts: **12.3 W**Lumens: **1072 lm**Efficacy: **87 lm/W**Beam Angle: **21°**1000 lm, 3000K, Spot **ART2D-10T30SPT**2" Standard Micro Flange Trim, White **X2TRDSWHMF**

Candela Distribution

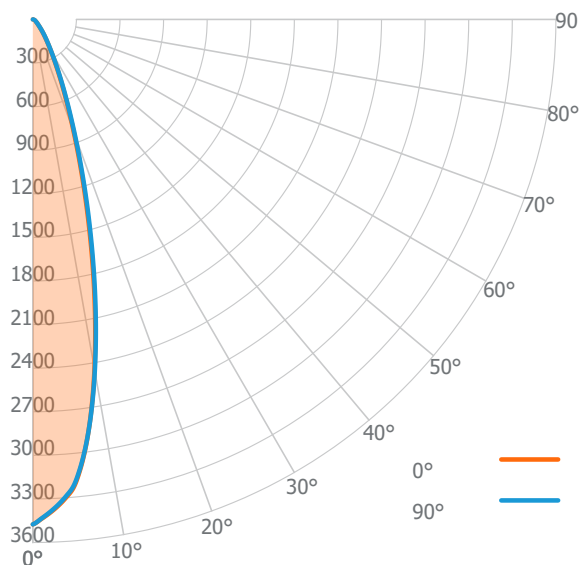

Luminous Intensity

	0°
0°	3475
5°	3232
10°	2444
15°	1510
20°	824
25°	444
30°	247
35°	146
40°	87
45°	55
50°	38
55°	27
60°	21
65°	17
70°	12
75°	9
80°	6
85°	3
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	855	84%
0° - 40°	937	92%
0° - 60°	994	98%
0° - 90°	1019	100%
0° - 180°	1019	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	386.1 fc	1.5 ft
6 ft	96.5 fc	2.9 ft
9 ft	42.9 fc	4.4 ft
12 ft	24.1 fc	5.9 ft


Input Watts: **12.0 W**Lumens: **1019 lm**Efficacy: **85 lm/W**Beam Angle: **27° x 28°**

PHOTOMETRY - ROUND TRIM

1000 lm, 3000K, Flood **ART2D-10T30FLT**

2" Standard Micro Flange Trim, White **X2TRDSWHMF**

Candela Distribution

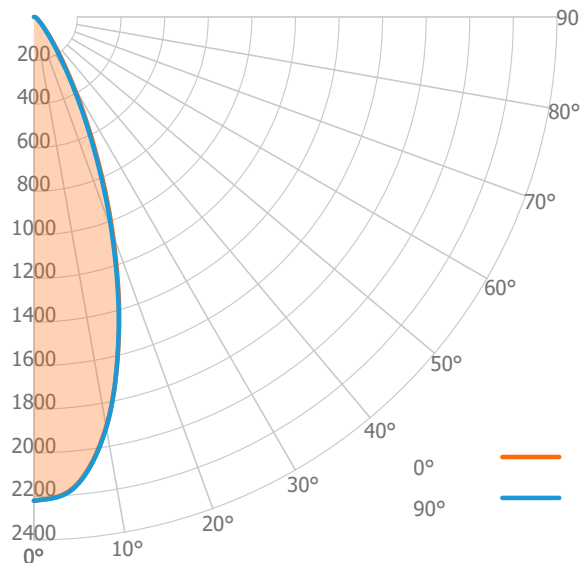

Luminous Intensity

	0°
0°	2220
5°	2162
10°	1910
15°	1507
20°	1057
25°	651
30°	358
35°	188
40°	101
45°	58
50°	36
55°	24
60°	19
65°	15
70°	11
75°	8
80°	5
85°	2
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	835	82%
0° - 40°	937	92%
0° - 60°	995	98%
0° - 90°	1017	100%
0° - 180°	1017	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	246.6 fc	2.1 ft
6 ft	61.7 fc	4.2 ft
9 ft	27.4 fc	6.3 ft
12 ft	15.4 fc	8.5 ft

Input Watts: **12.0 W**

Lumens: **1017 lm**


Efficacy: **85 lm/W**

Beam Angle: **39° x 38°**

1000 lm, 3000K, Wide Flood **ART2D-10T30WFT**

2" Standard Micro Flange Trim, White **X2TRDSWHMF**

Candela Distribution

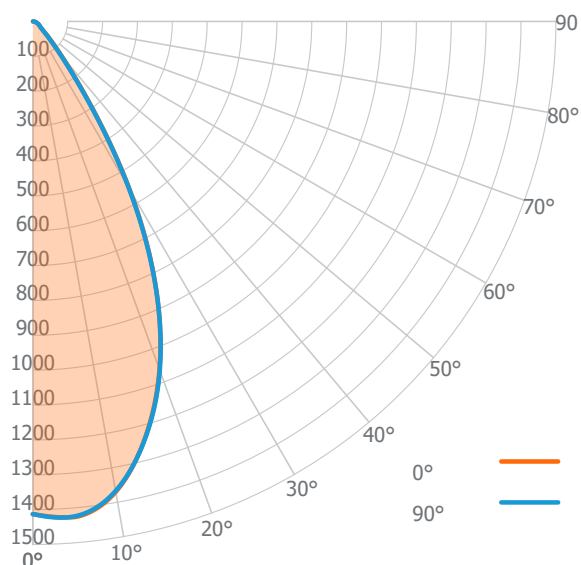

Luminous Intensity

	0°
0°	1413
5°	1426
10°	1370
15°	1240
20°	1062
25°	832
30°	552
35°	277
40°	126
45°	63
50°	35
55°	26
60°	21
65°	17
70°	13
75°	9
80°	6
85°	3
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	787	77%
0° - 40°	940	92%
0° - 60°	1001	98%
0° - 90°	1027	100%
0° - 180°	1027	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	157.0 fc	3.1 ft
6 ft	39.2 fc	6.2 ft
9 ft	17.4 fc	9.3 ft
12 ft	9.8 fc	12.3 ft

Input Watts: **12.0 W**

Lumens: **1027 lm**


Efficacy: **86 lm/W**

Beam Angle: **54° x 54°**

PHOTOMETRY - ROUND TRIM

1000 lm, 3000K, Linear Spread **ART2D-10T30LST**
2" Standard Micro Flange Trim, White **X2TRDSWHMF**

Candela Distribution

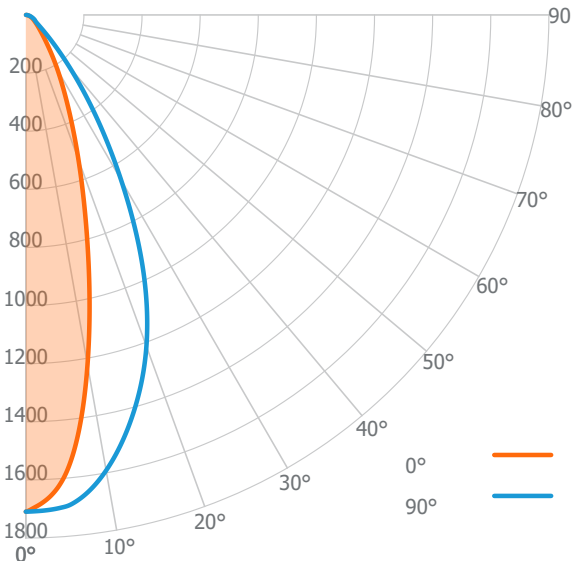

Luminous Intensity

	0°
0°	1709
5°	1584
10°	1223
15°	821
20°	530
25°	339
30°	219
35°	138
40°	90
45°	64
50°	47
55°	36
60°	29
65°	22
70°	16
75°	11
80°	7
85°	3
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	700	72%
0° - 40°	849	87%
0° - 60°	941	96%
0° - 90°	979	100%
0° - 180°	979	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	189.9 fc	1.6 ft
6 ft	47.5 fc	3.1 ft
9 ft	21.1 fc	4.7 ft
12 ft	11.9 fc	6.2 ft


Input Watts: **12.0 W**
Lumens: **979 lm**
Efficacy: **82 lm/W**
Beam Angle: **29° x 53°**

PHOTOMETRY - SQUARE TRIM

1000 lm, 3000K, Narrow Spot **ART2D-10T30NST**

2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

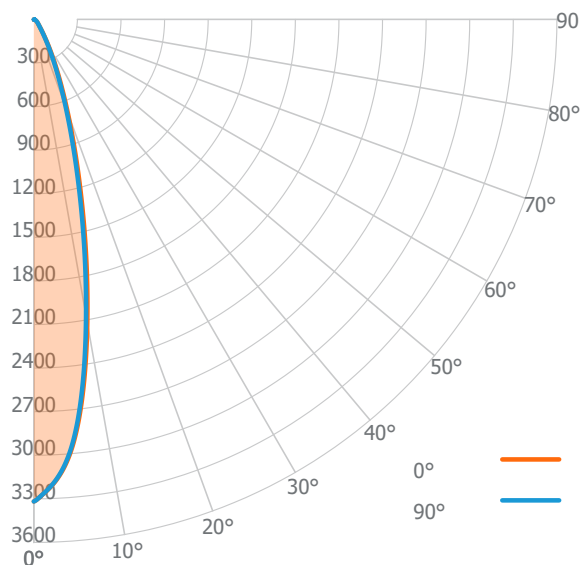

Luminous Intensity

	0°
0°	3318
5°	2972
10°	2119
15°	1258
20°	682
25°	360
30°	183
35°	97
40°	59
45°	42
50°	31
55°	23
60°	16
65°	11
70°	6
75°	3
80°	2
85°	1
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	708	87%
0° - 40°	760	93%
0° - 60°	803	98%
0° - 90°	816	100%
0° - 180°	816	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	368.7 fc	1.3 ft
6 ft	92.2 fc	2.7 ft
9 ft	41.0 fc	4.0 ft
12 ft	23.0 fc	5.3 ft

Input Watts: **12.3 W**

Lumens: **816 lm**


Efficacy: **66 lm/W**

Beam Angle: **25° x 24°**

1000 lm, 3000K, Spot **ART2D-10T30SPT**

2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

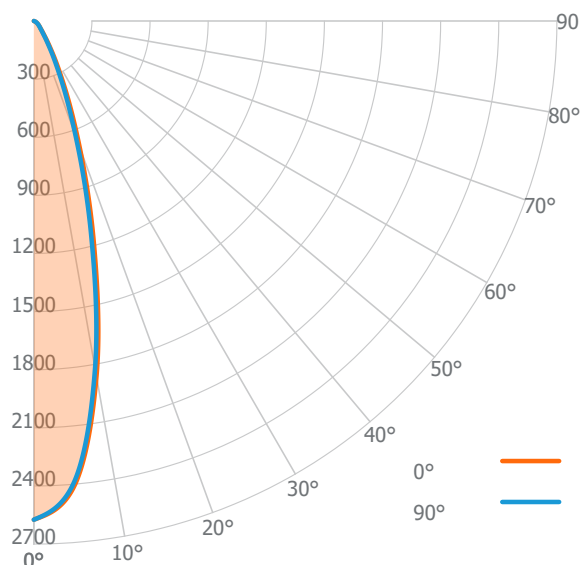

Luminous Intensity

	0°
0°	2574
5°	2408
10°	1863
15°	1203
20°	690
25°	374
30°	198
35°	106
40°	64
45°	44
50°	33
55°	24
60°	17
65°	11
70°	6
75°	3
80°	2
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	652	85%
0° - 40°	709	92%
0° - 60°	754	98%
0° - 90°	767	100%
0° - 180°	767	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	286.0 fc	1.5 ft
6 ft	71.5 fc	3.1 ft
9 ft	31.8 fc	4.6 ft
12 ft	17.9 fc	6.1 ft

Input Watts: **12.0 W**

Lumens: **767 lm**


Efficacy: **64 lm/W**

Beam Angle: **29° x 28°**

PHOTOMETRY - SQUARE TRIM

1000 lm, 3000K, Flood **ART2D-10T30FLT**2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

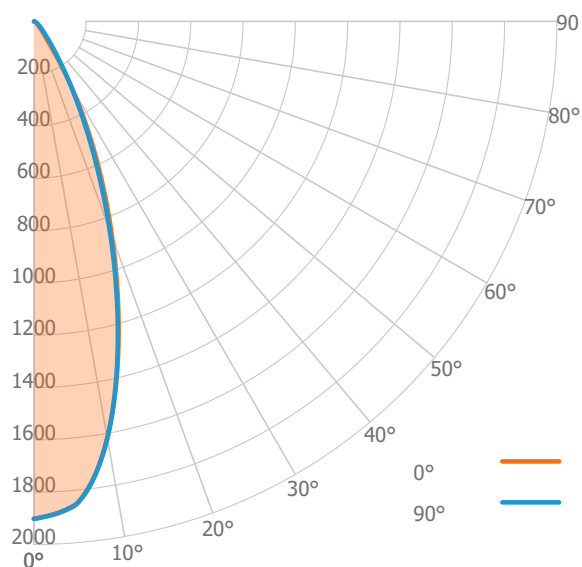

Luminous Intensity

	0°
0°	1902
5°	1855
10°	1620
15°	1252
20°	874
25°	546
30°	283
35°	99
40°	52
45°	30
50°	20
55°	14
60°	10
65°	7
70°	4
75°	2
80°	2
85°	1
90°	1

Zonal Lumen Summary


Zone	Lumens	Luminaire %
0° - 30°	693	85%
0° - 40°	763	94%
0° - 60°	801	99%
0° - 90°	813	100%
0° - 180°	813	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	211.3 fc	2.1 ft
6 ft	52.8 fc	4.1 ft
9 ft	23.5 fc	6.2 ft
12 ft	13.2 fc	8.2 ft

Input Watts: **12.0 W**Lumens: **813 lm**Efficacy: **68 lm/W**Beam Angle: **38° x 37°**1000 lm, 3000K, Wide Flood **ART2D-10T30WFT**2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

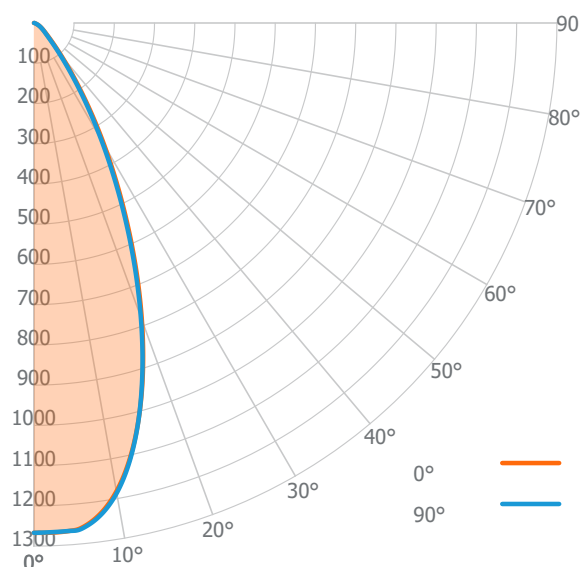

Luminous Intensity

	0°
0°	1267
5°	1263
10°	1182
15°	1011
20°	785
25°	549
30°	349
35°	199
40°	107
45°	60
50°	38
55°	27
60°	19
65°	12
70°	7
75°	4
80°	3
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	593	77%
0° - 40°	697	91%
0° - 60°	755	98%
0° - 90°	770	100%
0° - 180°	770	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	140.8 fc	2.6 ft
6 ft	35.2 fc	5.1 ft
9 ft	15.6 fc	7.7 ft
12 ft	8.8 fc	10.3 ft

Input Watts: **12.0 W**Lumens: **770 lm**Efficacy: **64 lm/W**Beam Angle: **46° x 46°**




PHOTOMETRY - SQUARE TRIM

1000 lm, 3000K, Linear Spread **ART2D-10T30LST**

2" Standard Micro Flange Trim, White **X2TSDSWHMF**

Candela Distribution

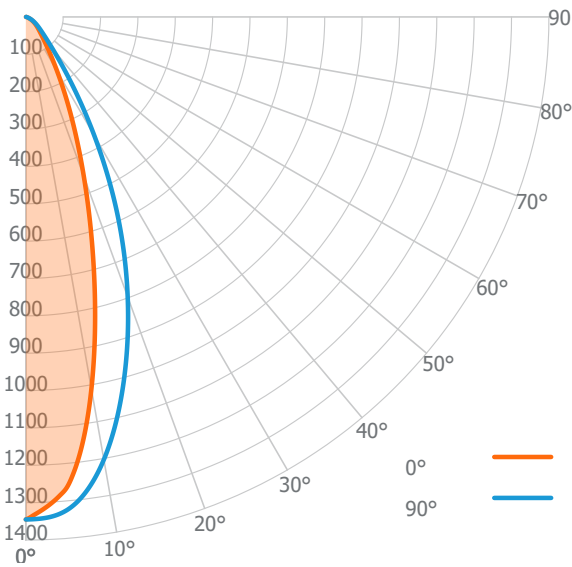

Luminous Intensity

	0°
0°	1345
5°	1264
10°	1011
15°	704
20°	454
25°	280
30°	168
35°	102
40°	68
45°	50
50°	38
55°	28
60°	20
65°	13
70°	7
75°	4
80°	2
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	507	76%
0° - 40°	591	88%
0° - 60°	652	97%
0° - 90°	670	100%
0° - 180°	670	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	149.5 fc	1.7 ft
6 ft	37.4 fc	3.3 ft
9 ft	16.6 fc	5.0 ft
12 ft	9.3 fc	6.7 ft

Input Watts: **12.0 W**

Lumens: **670 lm**

Efficacy: **56 lm/W**

Beam Angle: **31° x 46°**