


Project:	Type:
Product Code:	Date:

V022626

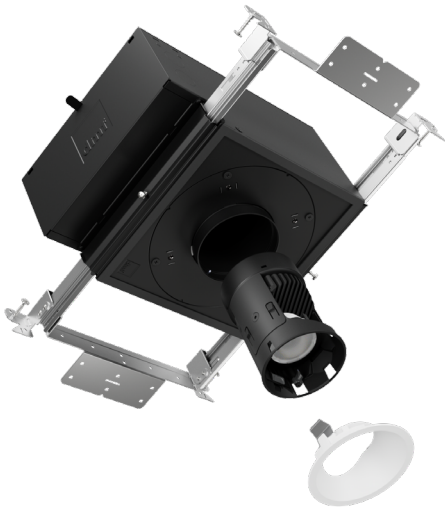

2" Round Adjustable

- SMALL APERTURE** Delivers the ultimate in quiet ceiling designs
- PRECISION LOCK COLLAR** Eliminates over-cutting and ensures perfect cutout
- ARCHITECTURE-GRADE** Deep die-cast aluminum knife edge trim provide unmatched precision and exceptionally easy installation
- DIMMING COMPATIBILITY GUARANTEED** In-house designed integrated driver ensures seamless compatibility with every major lighting control system

INSTALLATION

Ceiling Thickness

New Construction: 1/2" up to 1 1/4"
 Remodel: 1/2" up to 1 1/4"

Ceiling Material

Drywall, Millwork, Acoustic Ceiling Tiles

TRIMS

Style

Standard Micro Flange, Flangeless, Pinhole

Finish

White, Black, Bronze, Clear Diffuse, Custom Color (RAL Colors)

Premium Metalized Finish

Brass, Copper, Graphite

SPECIALTY LENS

Hexcell Louver

LIGHT OUTPUT & DISTRIBUTION

Module

Adjustable

Adjustment

360° directional aim, 35° tilt

Lumens (Power)

750 lm (9.5W), 1000 lm (12.5W)

Color Quality

True Spectrum®

Color Temperature

- 2700K 3000K 3500K
- 4000K Warm Dim (3000K–1800K)
- Tunable White (4000K–1800K)

Beam Spread

- 20° Narrow Spot
- 30° Spot
- 40° Flood
- 50° Wide Flood
- 50°x30° Linear Spread

POWER & CONTROLS

Input Voltage

120 / 277V

Dimming

TRIAC/ELV (1%, 120V only), DALI-2 (0.1%)

RATINGS & CERTIFICATIONS

- IC (Insulation Contact) Rated ¹
- ASTM E283 Certified Air Tight
- Chicago Plenum
- UL Listed for Damp Location
- RoHS Compliant
- DarkSky Approved ²

¹ New Construction only; IC for Roll, Batt, Loose Fill and Spray Foam see Housing section for details
² Downlight only, CCT less than or equal to 3000K, non-decorative trims only

WARRANTY

10 year limited warranty; 50,000 hours



PRODUCT BUILDER

ROUND HOUSINGEXAMPLE: X2NCR

PRODUCT CODE		INSTALLATION		SHAPE	
X2				R	
X2	2" Housing	NC	New Construction	R	Round
		CP	Chicago Plenum		
		RM	Remodel ¹		
		RD	Remodel, Digital Modules (DALI/PhaseX) ²		

¹ Non-IC installation only, Flanged and Micro Flange trims only;
 Not available with DALI-2 dimming
² Only available with DALI-2 dimming

MODULEEXAMPLE: ART2A07T27NST

PRODUCT CODE		LUMENS		COLORMETRIC		CCT ³		BEAM SPREAD		DIMMING	
ART2A				T							
ART2A	Adjustable	07	750 lm	T	True Spectrum®	27	2700K	NS	Narrow Spot (20°)	T	TRIAC/ELV
		10	1000 lm			30	3000K	SP	Spot (30°)	D	DALI-2 ⁷
						35	3500K	FL	Flood (40°)		
						40	4000K	WF	Wide Flood (50°)		
						3W	Warm Dim (3000K–1800K) ⁴	LS	Linear Spread (50°x30°)		
						T1	Tunable White (4000K–1800K) ⁵	NH	Narrow Spot Hexcell Louver ⁶		
								SH	Spot Hexcell Louver ⁶		
								FH	Flood Hexcell Louver ⁶		
								WH	Wide Flood Hexcell Louver ⁶		

³ DarkSky approved is only applicable to CCT options less than or equal to 3000K
⁴ Only available in 1000 lm; Not available in Narrow Spot beam spread
⁵ Only available in 750 lm, DALI-2 dimming; Not available in Narrow Spot beam spread
⁶ Not available in DALI-2 dimming
⁷ Only available in 750 lm with Tunable White CCT, 1000 lm Warm Dim or 1000 lm with Static CCT; Not compatible with Standard Remodel Housing, Digital Remodel only

ROUND TRIMEXAMPLE: X2TRASWHMF

PRODUCT CODE		FINISH		OPTION	
X2TRAS	2" Standard Trim ⁸	WH	White	[Blank]	(Pinhole Only)
X2TRAP	2" Pinhole Trim ⁹	BK	Black	MF	Micro Flange
		BZ	Bronze	FL	Flangeless ¹²
		CW	Clear Diffuse, White Flange ¹⁰		
		CC	Custom Color (RAL Colors)		
		PREMIUM METALIZED FINISH			
		BR	Brass ¹¹		
		CO	Copper ¹¹		
		GR	Graphite ¹¹		

⁸ Only available in Micro Flange and Flangeless option
⁹ Only available in White or Black finish; Not available in Micro Flange option
¹⁰ Only available in Standard Micro Flange option
¹¹ Only available in Standard style
¹² Not available in Clear Diffuse finish; Requires Flangeless Mud or Wood Kit in New Construction housings; Not compatible with Remodel housing



PRODUCT BUILDER


OPTICS

XAXOP	Bundled Adjustable Optics Kit <i>(Includes Narrow Spot, Spot, Flood, Wide Flood, Linear Spread)</i>
XAXNS	Narrow Spot (20°) Optic
XAXSP	Spot (30°) Optic
XAXFL	Flood (40°) Optic
XAXWF	Wide Flood (50°) Optic
XAXLS	Linear Spread (50°x30°) Optic
XAXNH	Narrow Spot Optic with Hexcell Louver
XAXSH	Spot Optic with Hexcell Louver
XAXFH	Flood Optic with Hexcell Louver
XAXWH	Wide Flood Optic with Hexcell Louver
XAXHD	High Diffusion Front Lens <i>(Can be paired with all beam spreads to provide extra diffusion; Only available as an optical accessory)</i>
XAXCL	Clear Front Lens <i>(Can be paired with all beam spreads to decrease diffusion and define edges; Only available as an optical accessory)</i>

ACCESSORIES

X2KRMUD	Flangeless Mud Kit <i>(Required for New Construction installation of Flangeless Trim in drywall ceiling)</i>
X2KRWOOD	Wood Kit <i>(Required for New Construction or Remodel installation in wood ceiling)</i>
X2KRTEMPLATE	Router Template <i>(Recommended for routing 3 3/16" [81mm] cutout in wood ceiling)</i>

MODULE

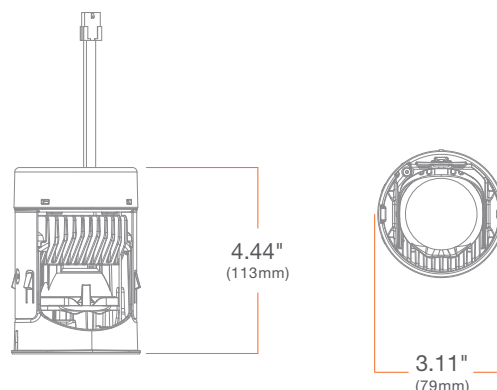

SUMMARY

	STATIC CCT	WARM DIM	TUNABLE WHITE
CCT	2700K, 3000K, 3500K, 4000K	3000K - 1800K	4000K - 1800K
LUMENS (POWER)	750 lm (9.5W), 1000 lm (12.5W)	1000 lm (12.5W)	750 lm (12.5W)
EFFICACY	79 lm/W, 80 lm/W	80 lm/W	60 lm/W
COLOR QUALITY	True Spectrum® 98 CRI, 2-step SDCM	True Spectrum® 93 CRI, 2-step SDCM	True Spectrum® 93 CRI, 3-step SDCM
BEAM SPREAD	Narrow Spot (20°), Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50°x30°)	Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50°x30°)	Spot (30°), Flood (40°), Wide Flood (50°), Linear Spread (50°x30°)
DIMMING	TRIAC/ELV, DALI-2	TRIAC/ELV, DALI-2	DALI-2
LED CHIP	Cree Pro9	Bridgelux	Bridgelux
LISTINGS	ENERGY STAR® qualified ¹ , California Title 24 2019–2022 JA8-E Compliant, UL Listed for Damp Location ² , UL Certified US-CA, Declare, RoHS compliant, Dark Sky Sompliant ³		
ADJUSTMENT	360° directional aim, 35° tilt		
SLOPE CEILING COMPATIBILITY	Up to 35°		

¹ Refer to ENERGY STAR Certified light fixtures database

² With Flanged trims, under covered areas only

³ Only applicable to CCT options less than or equal to 3000K

ADDITIONAL

INPUT VOLTAGE: 120/277V, 50/60Hz

MAX INPUT CURRENT (120V): 0.11 amps

MAX INPUT CURRENT (277V): 0.05 amps

CONNECTOR: 6-pin Molex




POWER FACTOR: Greater than 0.9

TOTAL HARMONIC DISTORTION: Less than 20%

AMBIENT OPERATING TEMPERATURE: -20°C to 40°C

WARRANTY: 10 year limited warranty; 50,000 hours at 70% lumen maintenance

HOUSING

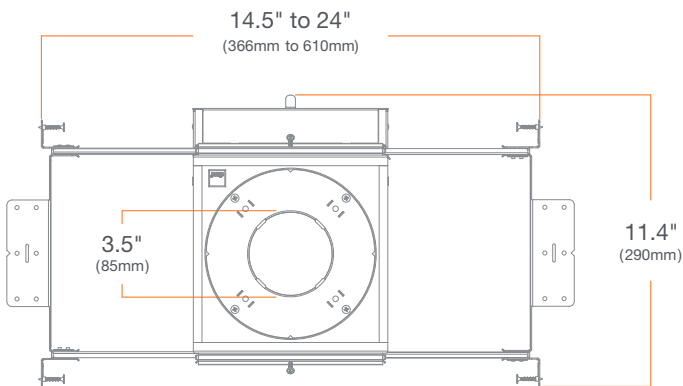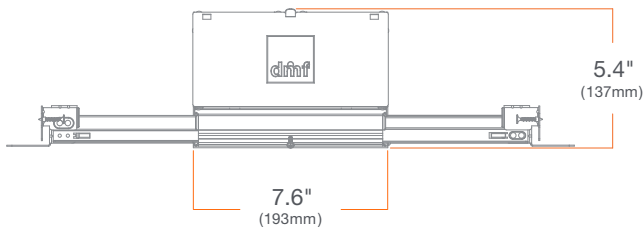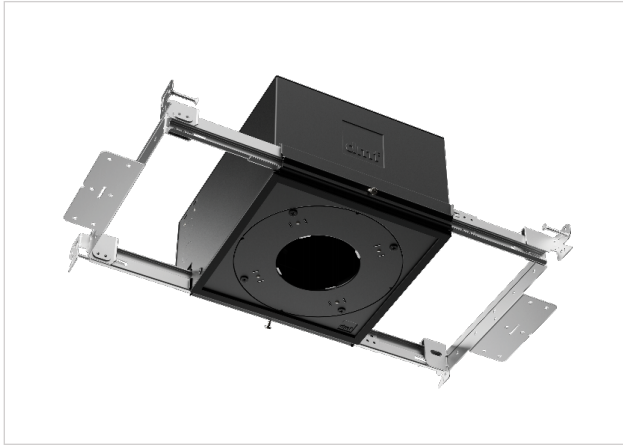

New Construction **X2NCR** Chicago Plenum **X2CPR**

SUMMARY

JUNCTION BOX: Equipped with 10 knockouts: four 1/2" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Adjustable Bar Hangers for 14 1/2" to 24" joist spacing, when bar hangers are broken down, up to 10 1/2" of joist spacing. Compatible with traditional joists, Armstrong TM ceiling, Hat Channel and T-Bar. Vertical adjustment (1/2"-1 1/4") through installation of the round collar.

CEILING: 1/2" up to 1 1/4"

CUTOUT: 3 1/4" (82mm) round opening

LISTINGS: Chicago Plenum, ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims or Hexcell Louver.

HOUSING



Remodel

X2RMR

SUMMARY

JUNCTION BOX: Equipped with four knockouts: two 1/2" trade size knockouts and two romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.


CEILING:

Drywall: 1/2" - 1 1/4" (12mm-32mm)


Wood Ceiling: 1/2" - 1" (12mm-25mm)

Acoustic Ceiling Tiles: 5/8" - 1 1/4" (16mm-32mm)

CUTOUT: 3 1/4" (82mm) round opening

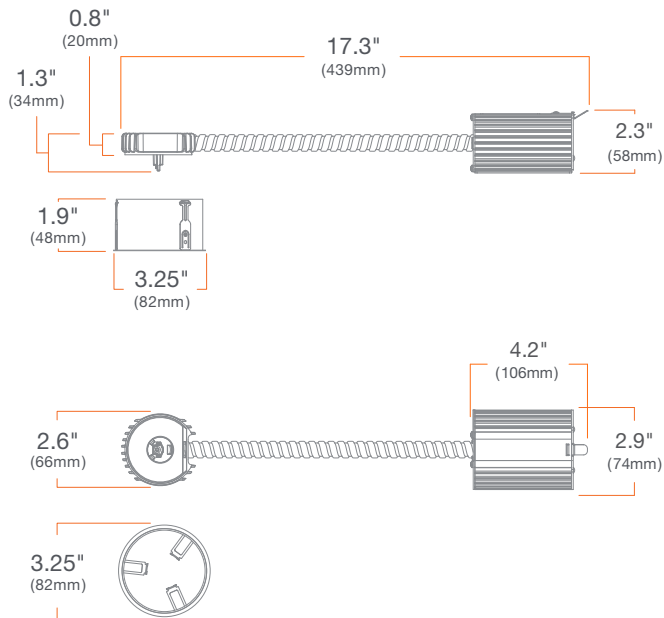

Total Height in Plenum

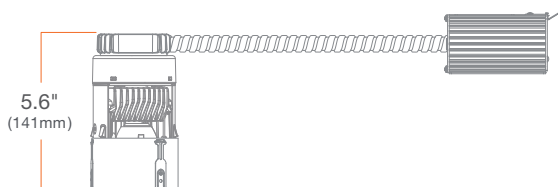

HOUSING



Remodel, Digital Modules (DALI/PhaseX)

X2RDR

SUMMARY

JUNCTION BOX: Equipped with four knockouts: two 1/2" trade size knockouts and two romex knockouts. Approved for 8 (four in, four out) #12 AWG 70°C.


CEILING:

Drywall: 1/2" - 1 1/4" (12mm-32mm)


Wood Ceiling: 1/2" - 1" (12mm-25mm)

Acoustic Ceiling Tiles: 5/8" - 1 1/4" (16mm-32mm)

CUTOUT: 3 1/4" (82mm) round opening

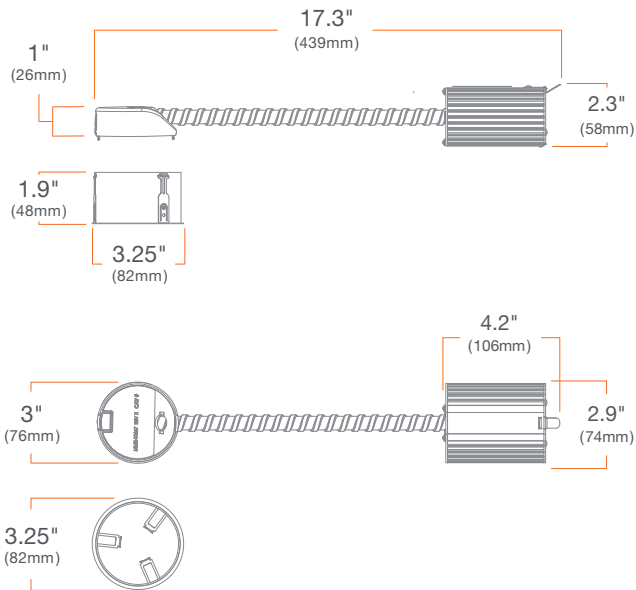

Total Height in Plenum

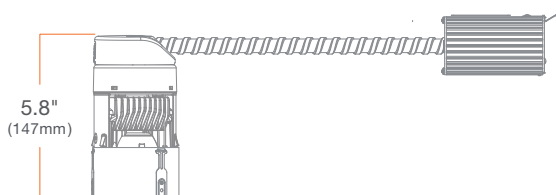

TRIMS



SUMMARY


CONSTRUCTION: Die-cast aluminum

FINISH: Wet paint

INSTALLATION: Precision Lock Collar included with Flanged or Micro Flange Trim and Flangeless Mud or Wood Kit


Standard Micro Flange

X2TRASWHMF

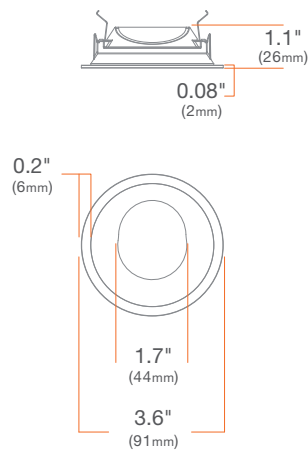


Standard Flangeless

X2TRASWHFL

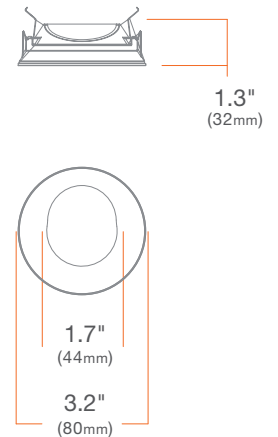


Pinhole

X2TRAPWH



Pinhole Flangeless

X2TRAPWHFL



ACCESSORIES




Flangeless Mud Kit

X2KRMUD

SUMMARY: Flangeless Mud Kit (Required for New Construction installation of Flangeless Trim in drywall ceiling)


CEILING: 1/2" up to 1 1/4"

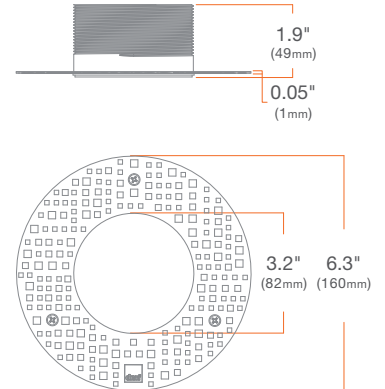

Router Template

X2KRTEMPLATE

SUMMARY: Router Template (Recommended for routing 3 3/16" [81mm] cutout in wood ceiling)

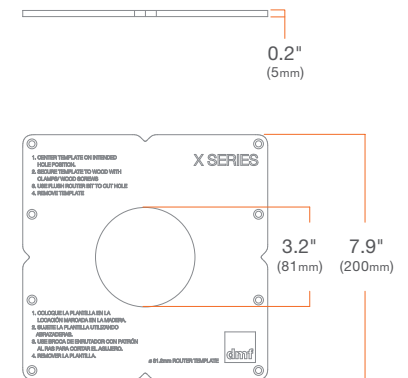


Wood Kit

X2KRWOOD

SUMMARY: Wood Kit (Required for New Construction installation in wood ceiling. Must be mounted on wood before installation to ceiling.)

CEILING: 1/2" up to 1 1/4"

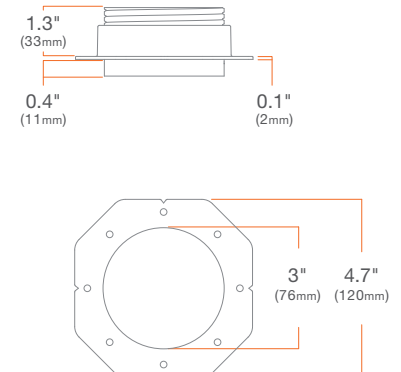


PHOTOMETRY

1000 lm, 3000K, Narrow Spot **ART2A-10T30NST**

2" Standard Micro Flange Trim, White **X2TRASWHMF**

Candela Distribution

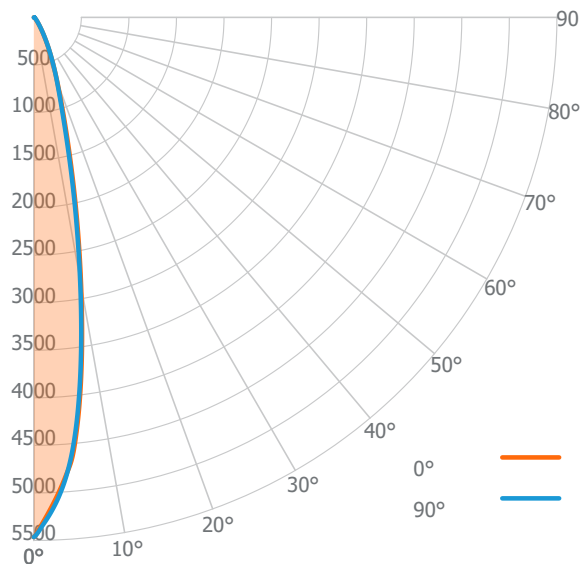

Luminous Intensity

	0°
0°	5465
5°	4644
10°	2863
15°	1412
20°	722
25°	389
30°	195
35°	97
40°	54
45°	33
50°	21
55°	15
60°	13
65°	11
70°	9
75°	6
80°	4
85°	2
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	899	90%
0° - 40°	953	95%
0° - 60°	988	98%
0° - 90°	1004	100%
0° - 180°	1004	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	607.2 fc	1.1 ft
6 ft	151.8 fc	2.2 ft
9 ft	67.5 fc	3.3 ft
12 ft	38.0 fc	4.4 ft

Input Watts: **12.0 W**

Lumens: **1004 lm**


Efficacy: **84 lm/W**

Beam Angle: **21° x 20°**

1000 lm, 3000K, Spot **ART2A-10T30SPT**

2" Standard Micro Flange Trim, White **X2TRASWHMF**

Candela Distribution

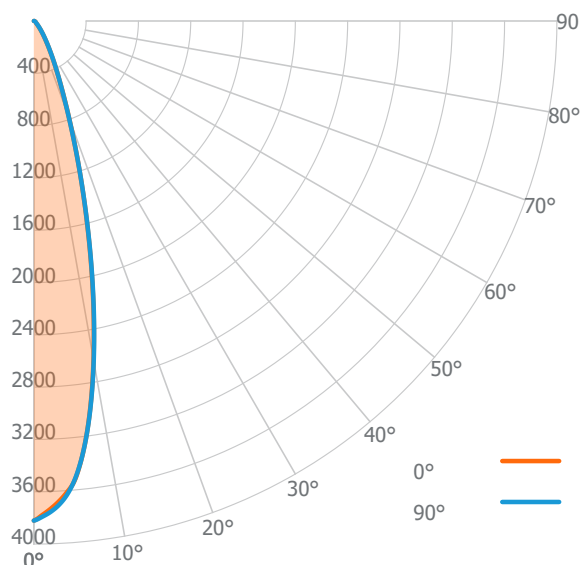

Luminous Intensity

	0°
0°	3821
5°	3537
10°	2629
15°	1553
20°	788
25°	404
30°	214
35°	117
40°	63
45°	36
50°	22
55°	16
60°	14
65°	12
70°	9
75°	7
80°	4
85°	2
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	858	88%
0° - 40°	922	94%
0° - 60°	959	98%
0° - 90°	977	100%
0° - 180°	977	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	424.5 fc	1.4 ft
6 ft	106.1 fc	2.8 ft
9 ft	47.2 fc	4.2 ft
12 ft	26.5 fc	5.7 ft

Input Watts: **12.0 W**

Lumens: **977 lm**

Efficacy: **81 lm/W**


Beam Angle: **27° x 27°**

PHOTOMETRY

1000 lm, 3000K, Flood ART2A-10T30FLT

2" Standard Micro Flange Trim, White X2TRASWHMF

Candela Distribution

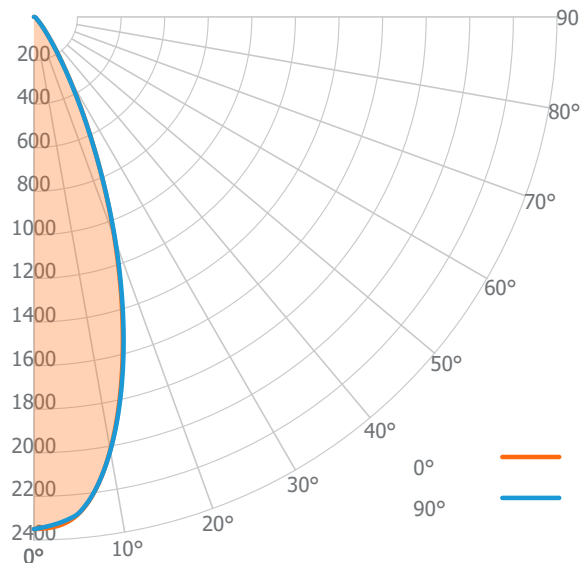

Luminous Intensity

	0°
0°	2350
5°	2293
10°	2018
15°	1577
20°	1083
25°	636
30°	322
35°	150
40°	72
45°	38
50°	21
55°	15
60°	13
65°	11
70°	9
75°	6
80°	4
85°	2
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	852	86%
0° - 40°	934	95%
0° - 60°	971	98%
0° - 90°	987	100%
0° - 180°	987	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	261.1 fc	2.1 ft
6 ft	65.3 fc	4.1 ft
9 ft	29.0 fc	6.2 ft
12 ft	16.3 fc	8.3 ft

Input Watts: 12.0 W

Lumens: 987 lm


Efficacy: 82 lm/W

Beam Angle: 38° x 38°

1000 lm, 3000K, Wide Flood ART2A-10T30WFT

2" Standard Micro Flange Trim, White X2TRASWHMF

Candela Distribution

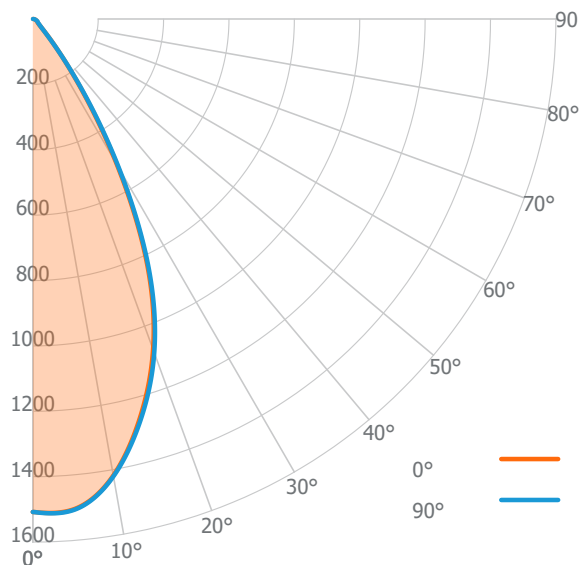

Luminous Intensity

	0°
0°	1508
5°	1503
10°	1418
15°	1265
20°	1076
25°	828
30°	516
35°	248
40°	96
45°	38
50°	23
55°	17
60°	15
65°	13
70°	10
75°	8
80°	5
85°	3
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	789	80%
0° - 40°	924	94%
0° - 60°	965	98%
0° - 90°	986	100%
0° - 180°	986	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	167.6 fc	3.0 ft
6 ft	41.9 fc	5.9 ft
9 ft	18.6 fc	8.9 ft
12 ft	10.5 fc	11.8 ft

Input Watts: 12.3 W

Lumens: 986 lm


Efficacy: 80 lm/W

Beam Angle: 52° x 52°

PHOTOMETRY

1000 lm, 3000K, Linear Spread **ART2A-10T30LST**
2" Standard Micro Flange Trim, White **X2TRASWHMF**

Candela Distribution

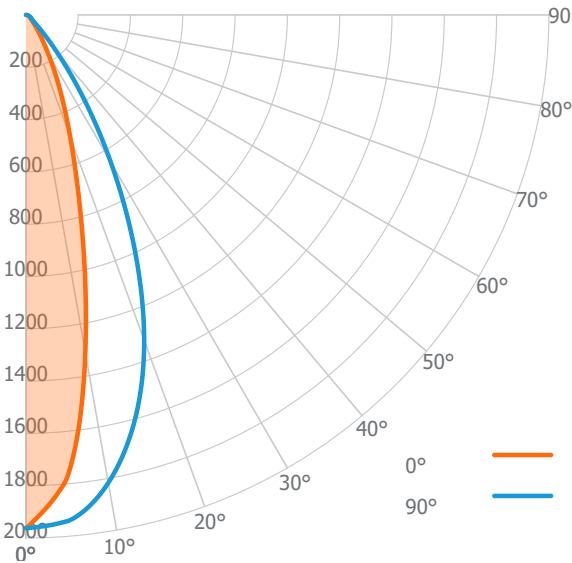

Luminous Intensity

	0°
0°	1962
5°	1782
10°	1310
15°	821
20°	496
25°	300
30°	171
35°	99
40°	60
45°	39
50°	27
55°	20
60°	17
65°	14
70°	11
75°	8
80°	5
85°	3
90°	1

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0° - 30°	732	78%
0° - 40°	857	91%
0° - 60°	916	97%
0° - 90°	941	100%
0° - 180°	941	100%

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3 ft	218.0 fc	1.4 ft
6 ft	54.5 fc	2.8 ft
9 ft	24.2 fc	4.2 ft
12 ft	13.6 fc	5.6 ft

Input Watts: **12.0 W**
Lumens: **941 lm**
Efficacy: **78 lm/W**
Beam Angle: **26° x 50°**