

Project:	Type:
Product Code:	Date:

V021026



Artafex 4" Square Adjustable

HIGH PERFORMANCE Produces up to 750 lumens of True Spectrum® lighting for natural, true-to-life colors without sacrificing stellar efficiency

PRECISE CONTROL Field-changeable light distribution ranging from 15° to 90°+

DIM TO DARK Smooth, flicker-free dimming down to 0.1% with centralized or local control

FAST INSTALL Integrated driver, plug-and-play connection, and Twist & Lock Trims

MODULAR DESIGN Flexibility during and after installation with interchangeable modules, optics and trims

INSTALLATION

Ceiling Thickness

New Construction: 1/2" up to 1 3/4"
 Spray Foam: 1/2" up to 2"
 Remodel: 5/8" up to 1 1/4"
 Low Profile: 1/2" up to 1 1/4"
 Super Shallow: 1/2" up to 1 1/2"

Ceiling Material

Drywall, Millwork, Concrete

TRIMS

Style

Standard, Flangeless, Round on Square, Pinhole

Finish

White, Black, Custom Color (RAL Colors)

LIGHT OUTPUT & DISTRIBUTION

Module

Adjustable

Adjustment

360° direction aim, 45° tilt

Lumens (Power)

750 lm (12.5W)

Color Quality

True Spectrum® 93 CRI, 3-step SDCM

Color Temperature

Tunable White (4000K–1800K)

Beam Spread

25° Spot 40° Flood
 60° x 30° Linear Spread

POWER & CONTROLS

Input Voltage

120 / 277V

Dimming

PhaseX (0.1%)

RATINGS & CERTIFICATIONS

- IC (Insulation Contact) Rated
- ASTM E283 Certified Air Tight
- Chicago Plenum
- UL Listed for Damp Location
- RoHS Compliant
- Code compliant for use in fire-rated assemblies up to a maximum of 2-hours

WARRANTY

10 year limited warranty; 50,000 hours



Declare.



PRODUCT BUILDER

HOUSING

EXAMPLE: **M4NCSS**

PRODUCT CODE		APPLICATION		SHAPE		RATING	
M4				S			
M4	4" Housing	NC	New Construction	S	Square	S	Standard
		NS	Super Shallow ¹			F	Fire Rated
		CP	Chicago Plenum ¹				
		LT	Low Profile, TRIAC/ELV (3" Plenum)				
		RM	Remodel				
		SF	Spray Foam ¹				

¹ Only available in Standard rating

GATEWAY

EXAMPLE: **ART-GWX**

PRODUCT CODE	
ART-GWX	
ART-GWX	DMX Input

4" MODULE

EXAMPLE: **ART4A07TT1SPX**

PRODUCT CODE		LUMENS		COLORMETRIC		CCT		BEAM SPREAD		FINISH		DIMMING	
ART4A		07		T		T1						X	
ART4A	Adjustable	07	750 lm	T	True Spectrum®	T1	Tunable White (4000K– 1800K)	SP	Spot (25°)	[Blank]	Black	X	PhaseX
								FL	Flood (40°)	W	White		
								LS	Linear Spread (60° x30°)				

TRIM

EXAMPLE: **M4TSQWH**

PRODUCT CODE		FINISH		OPTION	
M4TSQ	Round on Square	WH	White	[Blank]	None
M4TSP	Pinhole ²	BK	Black	FL	Flangeless ³
		BZ	Bronze		
		CW	Clear Diffuse, White Flange		
		CC	Custom Color (RAL Colors)		

² Not available in Bronze or Clear Diffuse finish³ Mud plate is required for all Flangeless trims except for wood ceiling applications.

Not available in spray foam or remodel application; Not available in Clear Diffuse finish

ACCESSORIES

M4XSMUD	Flangeless Mud Plate (Required for flangeless drywall application)
M4KSTEMPLATE	Wood Template (Recommended for flangeless trim wood installation)




PRODUCT BUILDER

OPTICS ACCESSORIES

EXAMPLE: DID4X-SP

PRODUCT CODE	
DID4X-SP	Adjustable Spot (25°)
DID4X-FL	Adjustable Flood (40°)
DID4X-LS	Adjustable Linear Spread (60° x 30°)
DID4X-OP	Adjustable Optics Kit: Spot (25°), Flood (40°), Linear Spread (60° x 30°), Soft Focus

GATEWAY

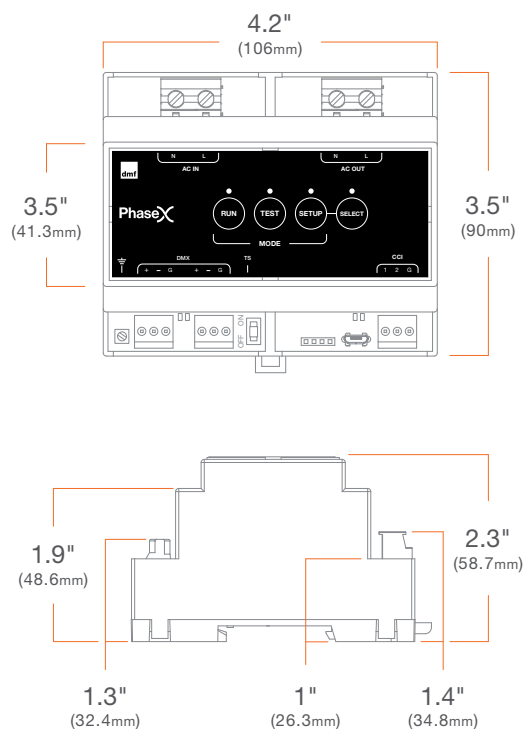

DMX Input **ART-GWX**

SUMMARY

The ART-GWX is a Gateway for use with Artafex PhaseX enabled fixtures. It provides full control of up to 64 PhaseX lighting fixtures connected over standard electrical wiring. The ART-GWX interfaces to lighting control systems using the industry standard DMX/RDM protocol unlocking the benefits of digital control and tunable white lighting.

FEATURES:

- Digital control of up to 64 fixtures over standard AC wiring
- Ultra reliable, 2-way communication
- Integration using DMX/RDM protocol
- Direct Integration to Crestron Home via DMX-C
(Requires DIN-GWDL Gateway from Crestron)

ELECTRICAL RATINGS:

- Input Voltage: 120VAC, 60Hz
- Max Output Current: 8A

ELECTRICAL CONNECTIONS

- AC Input: Screw terminals for AC Line and Neutral. Max 12 AWG wire.
- AC Output Terminal: Screw terminals for AC Line Out and Neutral Out. Max 12 AWG wire.
- DMX Input: (2) 3-position pluggable terminal block. (DMX+, DMX-, G)
- USB: Micro-USB connection for use with PhaseX Commissioning Utility
- Contact Closure: 2 x contact closure inputs. (CCI1, CC2, G)
(Reserved for future use)

ENVIRONMENTAL: 32 – 104°F (0 – 40°C)

ENCLOSURE:


- DIN Rail mount
- Black ABS plastic

COMPLIANCE:

- UL508, UL8750
- For installation within an electrical enclosure



MODULE

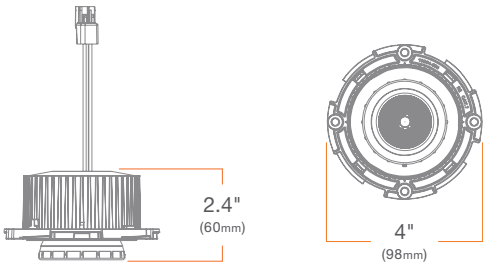

SUMMARY



	TUNABLE WHITE
CCT	4000K - 1800K
LUMENS (POWER)	750 lm (12.5W)
EFFICACY	60 lm/W
COLOR QUALITY	True Spectrum® 93 CRI, 3-step SDCM
BEAM SPREAD	Spot (25°), Flood (40°), Linear Spread (60° x 30°)
DIMMING	PhaseX
LED CHIP	Bridgelux
LISTINGS	ENERGY STAR® qualified ¹ , California Title 24 2016-2022 JA8-E compliant, UL Listed for Damp Location ² , UL Certified US-CA, Declare, RoHS compliant, DALI-2 Compliant
ADJUSTMENT	360° directional aim, 45° tilt
SLOPE CEILING COMPATIBILITY	Up to 45°

¹ Refer to ENERGY STAR Certified light fixtures database
² Under covered areas only

ADDITIONAL

INPUT VOLTAGE: 120/277V, 50/60Hz	POWER FACTOR: Greater than 0.9
MAX INPUT CURRENT (120V): 0.13 amps	TOTAL HARMONIC DISTORTION: Less than 20%
MAX INPUT CURRENT (277V): 0.065 amps	AMBIENT OPERATING TEMPERATURE: -20°C to 40°C
CONNECTOR: PowerPlug® Luminaire Disconnect Model 182, 6-pin Molex	WARRANTY: 10 year limited warranty; 50,000 hours at 70% lumen maintenance

HOUSING

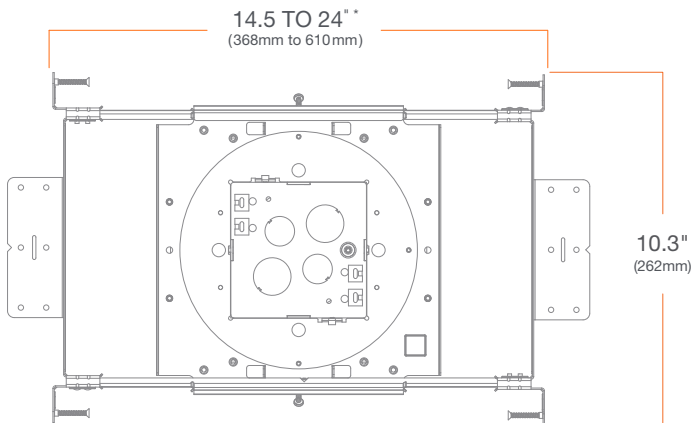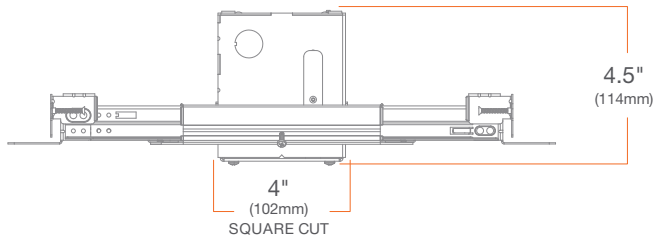

* Can be field cut to minimum 10" (254mm) for a range of 10" (254mm) - 24" (610mm)

M Series

New Construction

M4NCSS (Standard)

M4NCSF (Fire Rated)

M4CPSS (Chicago Plenum)

SUMMARY

JUNCTION BOX: Equipped with 12 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Adjustable Bar Hangers compatible with traditional joists, Armstrong™, Hat Channel, and T-Bar can accommodate the following spacing:

Standard (Deep): 7 1/2" (191mm) to 24" (610mm)

Low Profile Version: 9" (229mm) to 24" (610mm)

Super Shallow: 9 3/8" (238mm) - 24" (610mm)

CEILING: Pre-installed mounting brackets allow vertical adjustment of bar hangers up to 1 1/4" (32mm)
Standard Version (Deep): 1/2" (13mm) to 1 3/4" (44mm)
Low Profile Version: 1/2" (13mm) to 1 1/4" (32mm)
Super Shallow: 1/2" (13mm) - 1 1/2" (38mm)

CUTOUT: 4" (102mm) square opening

LISTINGS: Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated

ALTERNATE DIMMING SPECIFICATIONS

INPUT VOLTAGE: 120/277V, 50/60Hz

MAX INPUT CURRENT (120V): 0.090 amps, 0.107 amps


MAX INPUT CURRENT (277V): 0.042 amps, 0.050 amps

POWER FACTOR: Greater than 0.9

TOTAL HARMONIC DISTORTION: Less than 20%

Low-Profile


M4LTSS (Standard)
M4LTSF (Fire Rated)

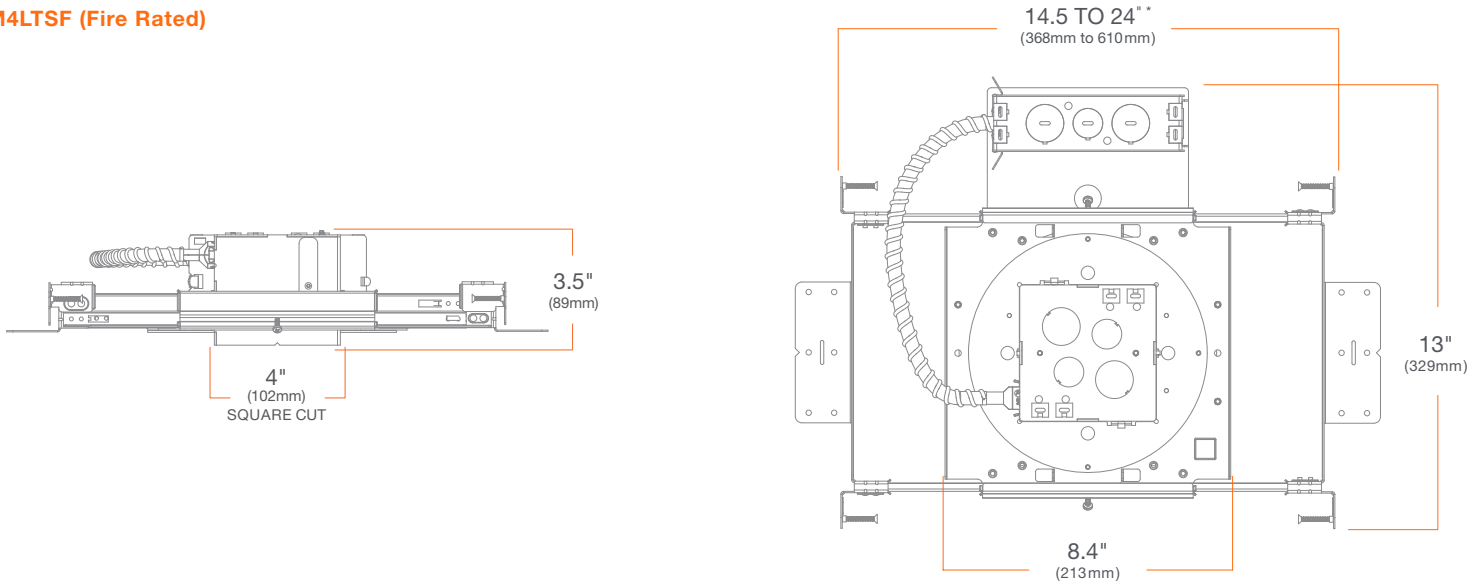

* Can be field cut to minimum 10" (229mm) for a range of 10" (254mm) - 24" (610mm)




Super Shallow

M4NSSS + Adjustable Module
 (Pre-set to 3" plenum depth at factory)

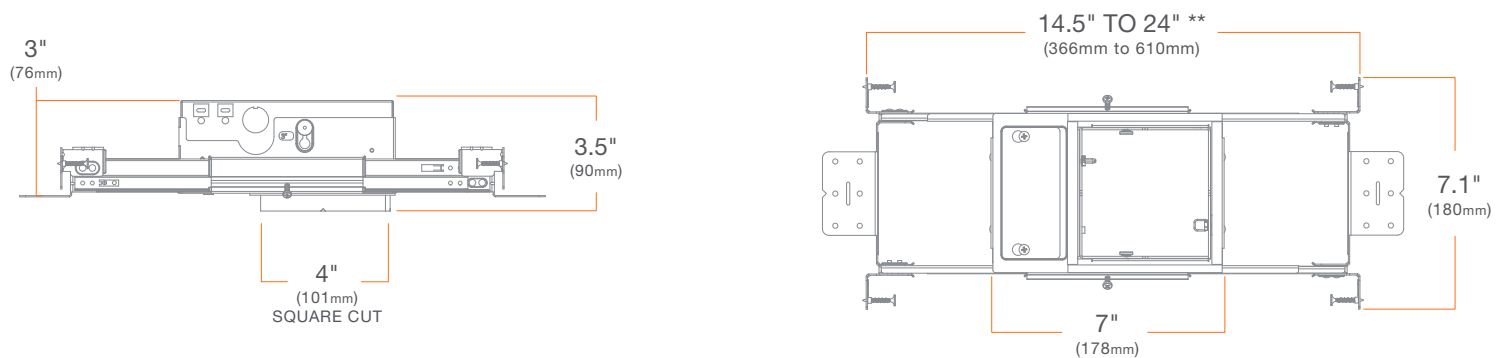

** Can be field cut to a minimum 10" (254mm) for a range of 10" (254mm) to 24" (610mm)

HOUSING

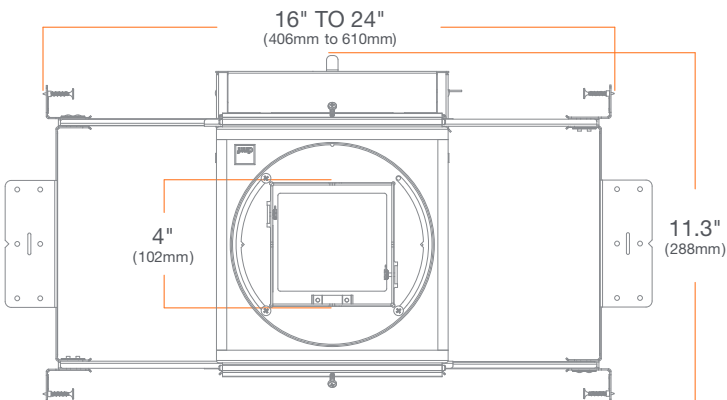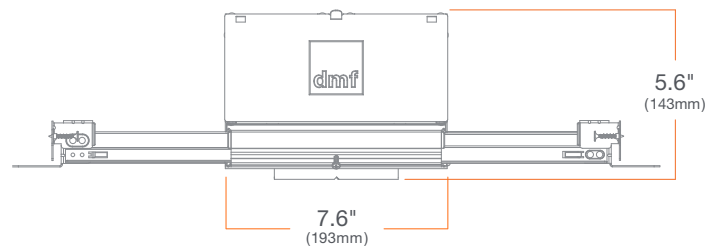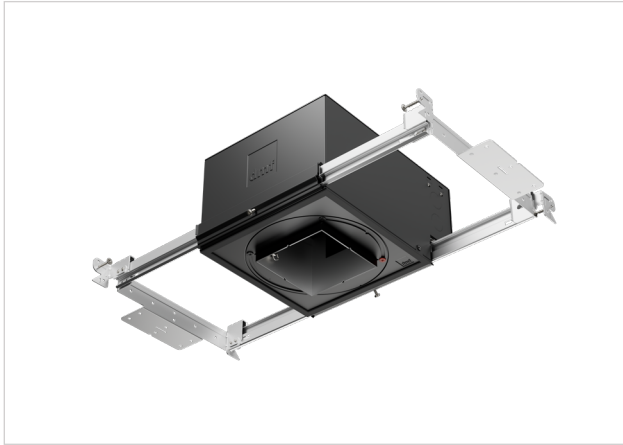

M Series

Spray Foam

M4SFRS

SUMMARY

JUNCTION BOX: Equipped with six knockouts: four 1/2" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70° C

MOUNTING: Adjustable Bar Hanger for 10.5" (267mm) to 24" (610mm) joist spacing. Compatible with traditional joists, Armstrong TM ceiling, Hat Channel and T-bar


CEILING: Center Collar allows for vertical adjustment to accommodate from 1/2" (13mm) to 2" (51mm) thickness

CUTOUT: 4" (102mm) square opening

LISTINGS: ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims

** Can be field cut to a minimum 10 1/2" (267mm) for a range of 10 1/2" (267mm) to 24" (610mm)

HOUSING

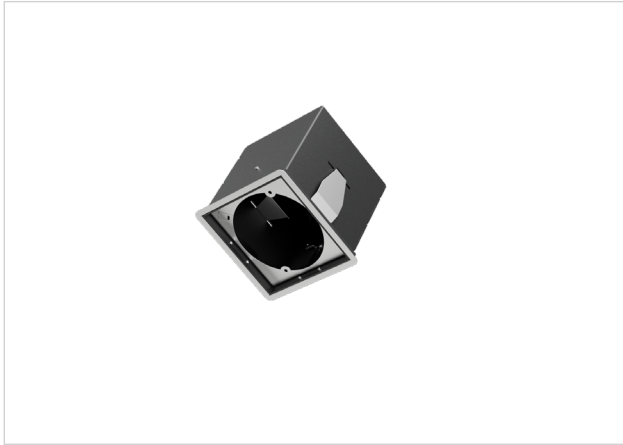

M Series

Remodel

M4RMSS (Standard)**M4RMSF (Fire Rated)**

SUMMARY



JUNCTION BOX: Equipped with 8 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Pre-installed mounting spring clips

CEILING: 5/8" (16mm) up to 1 1/4" (32mm)

CUTOUT: 4" (102mm) square opening

LISTINGS: Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated



TRIMS



4" Square Trims

M4TS



SUMMARY

CONSTRUCTION: Die-cast aluminum

INSTALLATION: Twist & Lock



Round On Square

M4TSQWH

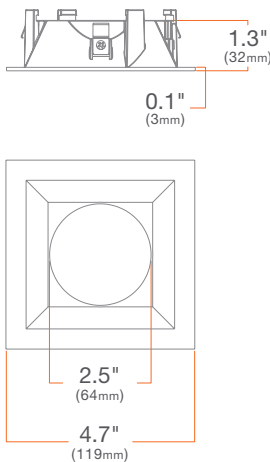


Round On Square Flangeless

M4TSQWHFL

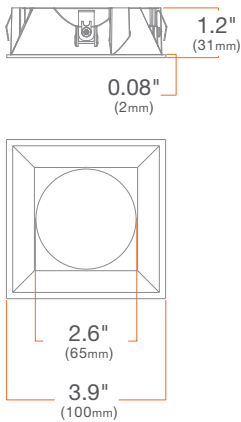


Pinhole

M4TSPWH

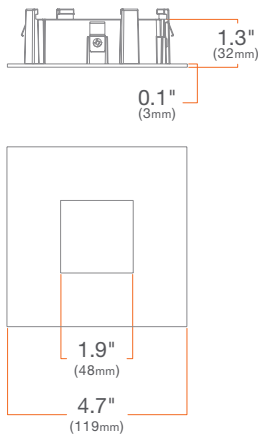

Pinhole Flangeless


M4TSPWHFL

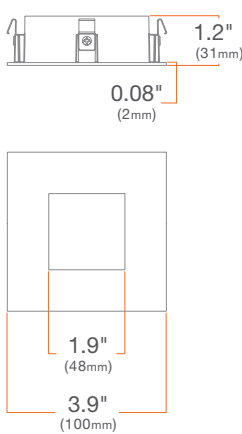

ACCESSORIES


Flangeless Mud Plate

M4XSMUD

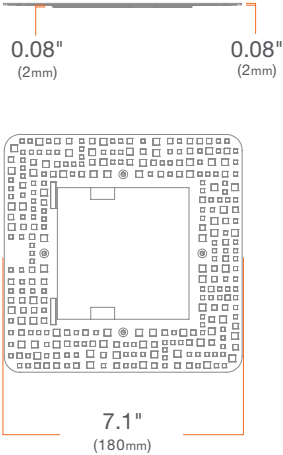

Router Template


M4KSTEMPLATE

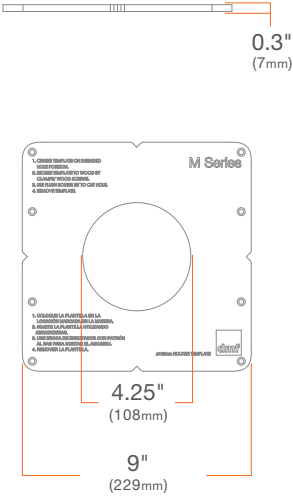

PHOTOMETRY

ART4A 750 lm, 3000K, Spot

ART4AM07930SP

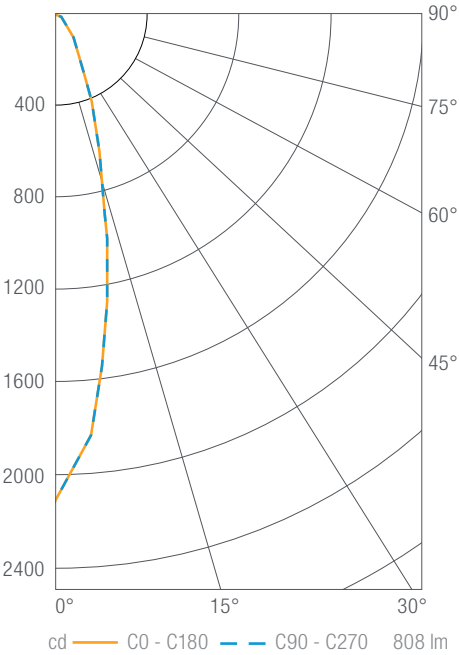

Luminous Intensity

Gamma	C 0°
0°	2105
5°	1826
10°	1282
15°	800
20°	497
25°	310
30°	201
35°	137
40°	98
45°	73
50°	57
55°	45
60°	35
65°	23
70°	12
75°	5
80°	3
85°	2
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	573	71
0-40	668	83
0-60	773	96
0-90	808	100
0-180	808	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	234	1.3'
6'	58	2.6'
9'	26	3.9'
12'	15	5.2'

Beam Angle: 28°

ART4A 750 lm, 3000K, Flood

ART4AM07930FL

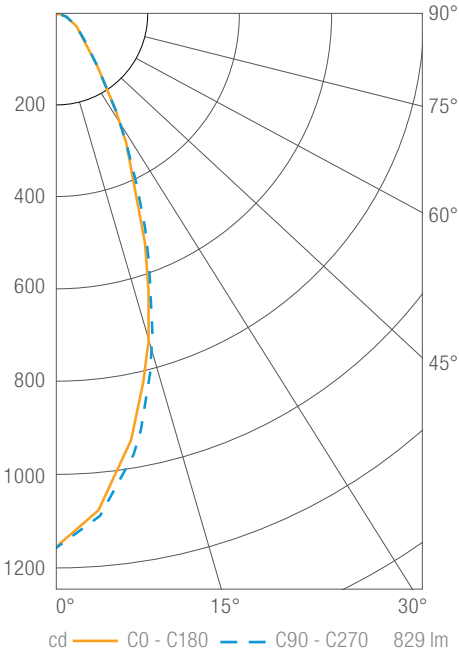

Luminous Intensity

Gamma	C 0°
0°	1158
5°	1081
10°	941
15°	765
20°	576
25°	414
30°	288
35°	192
40°	130
45°	96
50°	76
55°	61
60°	49
65°	38
70°	28
75°	18
80°	10
85°	4
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	510	62
0-40	633	76
0-60	766	92
0-90	829	100
0-180	829	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	129	2.2'
6'	32	4.5'
9'	14	6.7'
12'	8	9.0'


Beam Angle: 41°



PHOTOMETRY

ART4A 750 lm, 3000K, Linear Spread

ART4AM07930LS

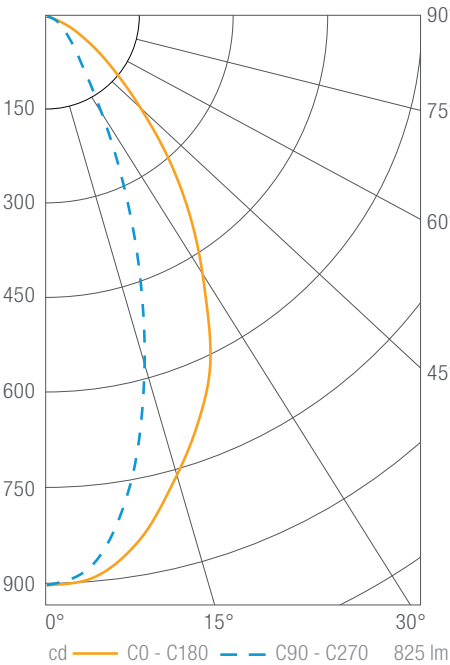

Luminous Intensity

Gamma	C 0°
0°	895
5°	885
10°	838
15°	763
20°	689
25°	608
30°	497
35°	399
40°	305
45°	216
50°	150
55°	103
60°	66
65°	41
70°	17
75°	4
80°	1
85°	1
90°	0

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	468	57
0-40	626	76
0-60	790	96
0-90	825	100
0-180	825	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	99.5	3.8'
6'	24.9	7.7'
9'	11.1	11.5'
12'	6.2	15.3'

Beam Angle: 38°