

Project:	Type:
Product Code:	Date:

V021026



Artafex 4" Square Downlight

HIGH PERFORMANCE Produces up to 1000 lumens of True Spectrum® lighting for natural, true-to-life colors without sacrificing stellar efficiency

PRECISE CONTROL Field-changeable light distribution ranging from 15° to 90°+

DIM TO DARK Smooth, flicker-free dimming with centralized or local control

FAST INSTALL Integrated driver, plug-and-play connection, and Twist & Lock Trims

MODULAR DESIGN Flexibility during and after installation with interchangeable modules, optics and trims

INSTALLATION

Ceiling Thickness

New Construction: 1/2" up to 1 3/4"
 Spray Foam: 1/2" up to 2"
 Remodel: 5/8" up to 1 1/4"
 Low Profile: 1/2" up to 1 1/4"
 Super Shallow: 1/2" up to 1 1/2"

Ceiling Material

Drywall, Millwork, Concrete

TRIMS

Style

Standard, Flangeless, Round on Square, Wall Wash, Pinhole, Decorative

Finish

White, Black, Bronze, Clear Diffuse, Custom Color

LIGHT OUTPUT & DISTRIBUTION

Module

Downlight

Lumens (Power)

1000 lm (14.5W)

Color Quality

True Spectrum®, 3-step SDCM

Color Temperature

 Tunable White (4000K–1800K)

Beam Spread

	25° Spot		40° Flood
	60° Wide Flood		90°+ General
	40° x 20° Linear Spread		

POWER & CONTROLS

Input Voltage

120 / 277V

Dimming

PhaseX (0.1%)

RATINGS & CERTIFICATIONS

-  IC (Insulation Contact) Rated
-  ASTM E283 Certified Air Tight
-  Chicago Plenum
-  UL Listed for Wet Location (Standard Trim only)
-  RoHS Compliant
-  Code compliant for use in fire-rated assemblies up to a maximum of 2-hours
-  NSF Listed (White and Black Finish Only)

WARRANTY

10 year limited warranty; 50,000 hours



PRODUCT BUILDER

HOUSING

EXAMPLE: **M4NCSS**

PRODUCT CODE		APPLICATION		SHAPE		RATING	
M4				S			
M4	4" Housing	NC	New Construction	S	Square	S	Standard
		NS	Super Shallow ¹			F	Fire Rated
		CP	Chicago Plenum ¹				
		LT	Low Profile, TRIAC/ELV (3" Plenum)				
		RM	Remodel				
		SF	Spray Foam ¹				

¹ Only available in Standard rating

GATEWAY

EXAMPLE: **ART-GWX**

PRODUCT CODE	
ART-GWX	
ART-GWX	DMX Input

ARTAFEX MODULE

EXAMPLE: **ART4D10TT1GAX**

PRODUCT CODE		LUMENS		CRI		CCT		BEAM SPREAD		FINISH		DIMMING	
ART4D		10		T		T1				-		X	
ART4D	Downlight	10	1000 lm	T	True Spectrum®	T1	Tunable White (4000K- 1800K)	GA	General Ambient (90°+)	[Blank]	Black	X	PhaseX
								SP	Spot (25°)				
								FL	Flood (40°)				
								WF	Wide Flood (60°)				
								LS	Linear Spread (40° x 20°)				

TRIM

EXAMPLE: **M4TSSWH**

PRODUCT CODE		FINISH		OPTION	
M4TSS	Standard	WH	White	[Blank]	None
M4TSQ	Round on Square	BK	Black	DCF	Decorative: Closed, Frosted ⁴
M4TSP	Pinhole ²	BZ	Bronze	DCCF	Decorative: Closed, Clear, Frosted Inside ⁴
M4TSL	Wall Wash/Sloped Ceiling ³	CW	Clear Diffuse, White Flange	FL	Flangeless ⁵
		CC	Custom Color (RAL Colors)		

ACCESSORIES

M4XSMUD	Flangeless Mud Plate <i>(Required for flangeless drywall application)</i>
M4KSTEMPLATE	Wood Template <i>(Recommended for flangeless trim wood installation)</i>

² Only available in White, Black or Custom Color finish and available in 750 lm or 1000 lm³ Recommended with General Ambient beam spread for general wallwashing and Spot Beam Spread for sloped ceiling; Not available in Bronze finish⁴ Only available in General Ambient beam spread and Standard style, White finish⁵ Mudplate is required for all Flangeless trims except for wood ceiling applications; Not available in Clear Diffuse finish





PRODUCT BUILDER

OPTICS ACCESSORIES

EXAMPLE: DID2X-GA

PRODUCT CODE	
DID2X-GA	Fixed Conversion Kit: ART 4 Module to General Ambient (90°+)
DID2X-SP	Fixed Spot (25°)
DID2X-FL	Fixed Flood (40°)
DID2X-WF	Fixed Wide Flood (60°)
DID2X-LS	Fixed Linear Spread (40° x 20°)
DID2X-OP	Fixed Optics Kit: Spot (25°), Flood (40°), Wide Flood (60°), Linear Spread (40° x 20°)

GATEWAY

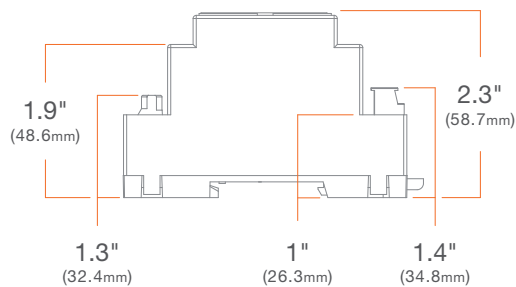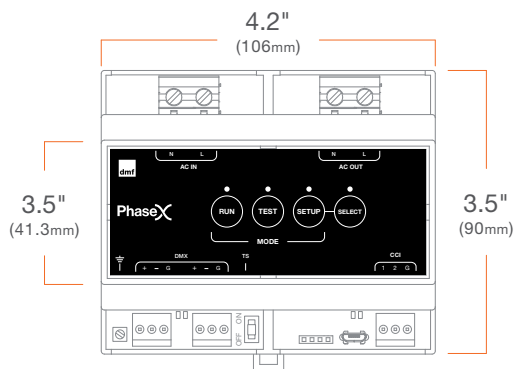DMX Input **ART-GWX**

SUMMARY

The ART-GWX is a Gateway for use with Artafex PhaseX enabled fixtures. It provides full control of up to 64 PhaseX lighting fixtures connected over standard electrical wiring. The ART-GWX interfaces to lighting control systems using the industry standard DMX/RDM protocol unlocking the benefits of digital control and tunable white lighting.

FEATURES:

- Digital control of up to 64 fixtures over standard AC wiring
- Ultra reliable, 2-way communication
- Integration using DMX/RDM protocol
- Direct Integration to Crestron Home via DMX-C
(Requires DIN-GWDL Gateway from Crestron)

ELECTRICAL RATINGS:

- Input Voltage: 120VAC, 60Hz
- Max Output Current: 8A

ELECTRICAL CONNECTIONS

- AC Input: Screw terminals for AC Line and Neutral. Max 12 AWG wire.
- AC Output Terminal: Screw terminals for AC Line Out and Neutral Out. Max 12 AWG wire.
- DMX Input: (2) 3-position pluggable terminal block. (DMX+, DMX-, G)
- USB: Micro-USB connection for use with PhaseX Commissioning Utility
- Contact Closure: 2 x contact closure inputs. (CCI1, CC2, G)
(Reserved for future use)

ENVIRONMENTAL: 32 – 104°F (0 – 40°C)



ENCLOSURE:

- DIN Rail mount
- Black ABS plastic

COMPLIANCE:

- UL508, UL8750
- For installation within an electrical enclosure

DOWNLIGHT MODULE



SUMMARY

TUNABLE WHITE

CCT	4000K - 1800K
LUMENS (POWER)	1000 lm (14.5W)
EFFICACY	71 lm/W
COLOR QUALITY	True Spectrum® 93 CRI, 3-step SDCM
DIMMING	PhaseX
LED CHIP	Bridgelux
BEAM SPREAD	General Ambient (90°+), Spot (25°), Flood (40°), Wide Flood (60°), Linear Spread (40° x 20°)
LISTINGS	ENERGY STAR® qualified ¹ , California Title 24 2016-2022 JA8-E compliant, UL Listed for Wet Location, UL Certified US-CA, Declare, RoHS compliant, NSF/ANSI 2 listed, suitable for splash-zone ²

¹ Refer to ENERGY STAR Certified light fixtures database

² This product is evaluated in accordance to NSF/ANSI 2 for Splash Zone having designated trim finishes

ADDITIONAL

INPUT VOLTAGE: 120/277V, 50/60Hz

MAX INPUT CURRENT (120V): 0.13 amps

MAX INPUT CURRENT (277V): 0.065 amps

CONNECTOR: PowerPlug® Luminaire Disconnect Model 182, 6-pin Molex



POWER FACTOR: Greater than 0.9

TOTAL HARMONIC DISTORTION: Less than 20%

AMBIENT OPERATING TEMPERATURE: -20°C to 40°C

WARRANTY: 10 year limited warranty; 50,000 hours at 70% lumen maintenance

HOUSING

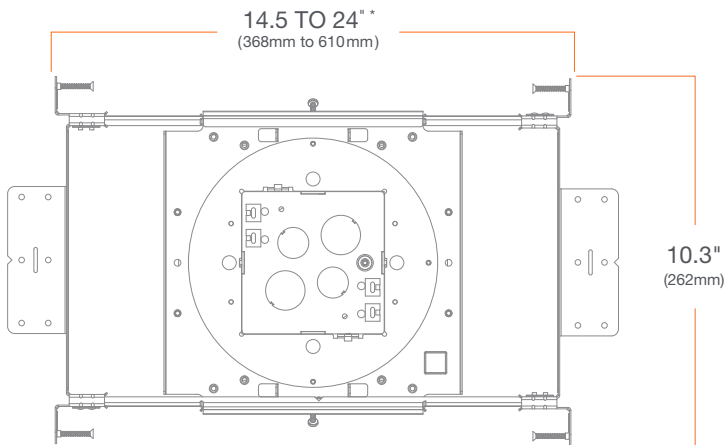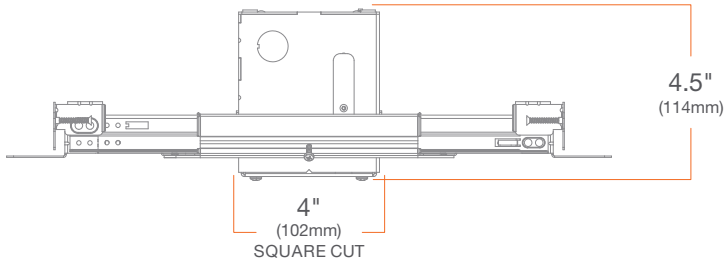

* Can be field cut to minimum 10" (254mm) for a range of 10" (254mm) - 24" (610mm)

M Series

New Construction

M4NCSS (Standard)

M4NCSF (Fire Rated)

M4CPSS (Chicago Plenum)

SUMMARY

JUNCTION BOX: Equipped with 12 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Adjustable Bar Hangers compatible with traditional joists, Armstrong™, Hat Channel, and T-Bar can accommodate the following spacing:

Standard (Deep): 7 1/2" (191mm) to 24" (610mm)

Low Profile Version: 9" (229mm) to 24" (610mm)

Super Shallow: 9 3/8" (238mm) - 24" (610mm)


CEILING: Pre-installed mounting brackets allow vertical adjustment of bar hangers up to 1 1/4" (32mm)
Standard Version (Deep): 1/2" (13mm) to 1 3/4" (44mm)
Low Profile Version: 1/2" (13mm) to 1 1/4" (32mm)
Super Shallow: 1/2" (13mm) - 1 1/2" (38mm)

CUTOUT: 4" (102mm) square opening


LISTINGS: Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated

Low-Profile

M4LTSS (Standard)
M4LTSF (Fire Rated)

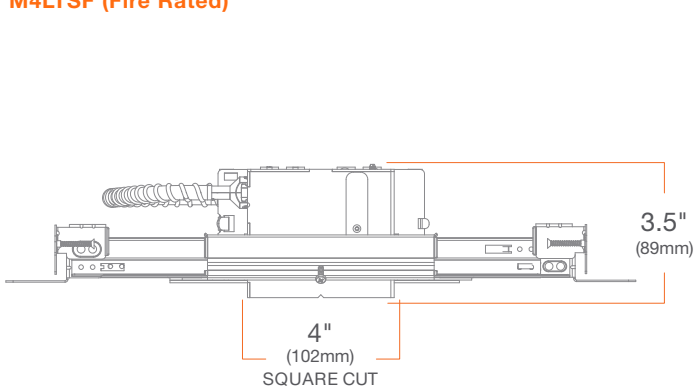


* Can be field cut to minimum 10" (254mm) for a range of 10" (254mm) - 24" (610mm)

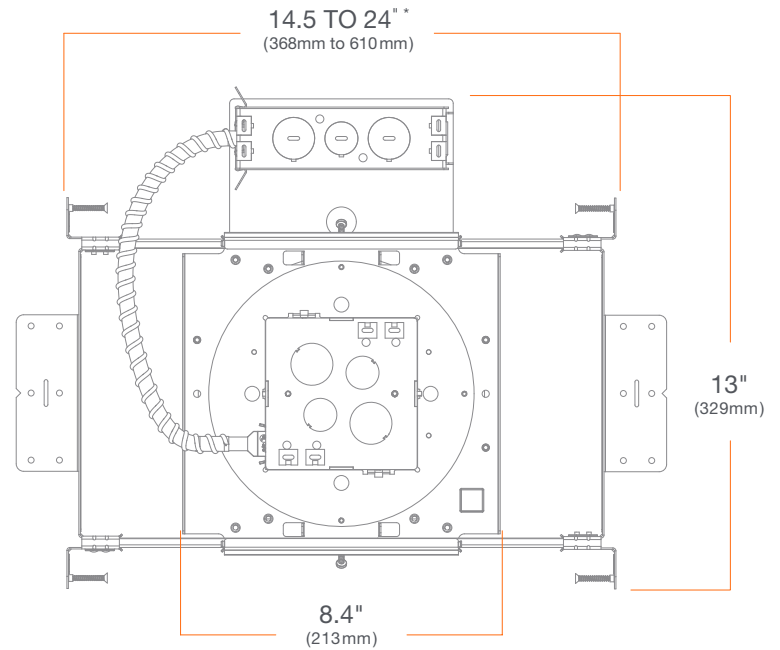


Super Shallow


M4NSSS + PhaseX Downlight Module
 (Pre-set to 3" plenum depth at factory)

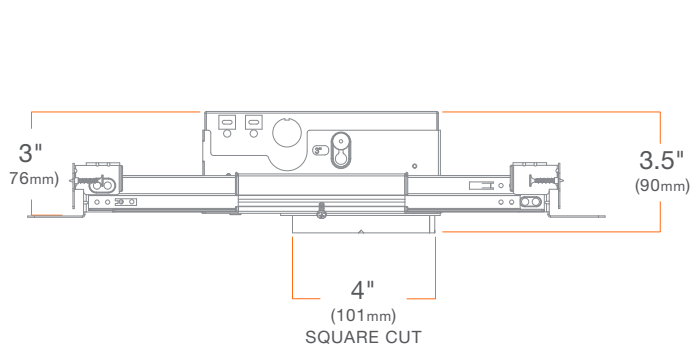

** Can be field cut to a minimum 10" (254mm) for a range of 10" (254mm) to 24" (610mm)

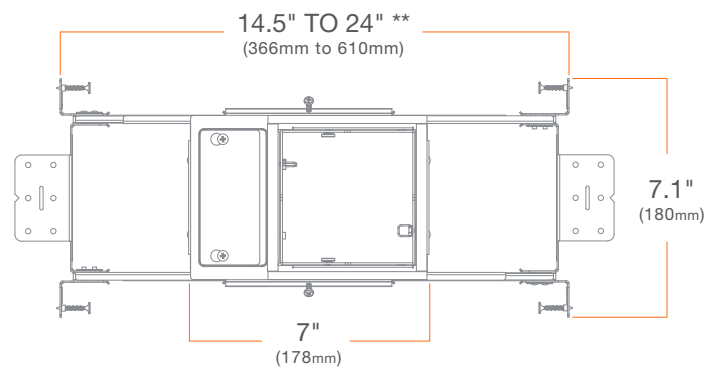

HOUSING

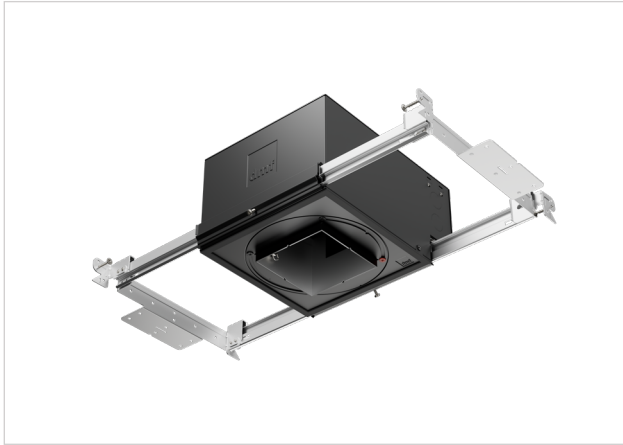

M Series

Spray Foam

M4SFRS

SUMMARY



JUNCTION BOX: Equipped with six knockouts: four 1/2" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70° C

MOUNTING: Adjustable Bar Hanger for 10.5" (267mm) to 24" (610mm) joist spacing. Compatible with traditional joists, Armstrong TM ceiling, Hat Channel and T-bar

CEILING: Center Collar allows for vertical adjustment to accommodate from 1/2" (13mm) to 2" (51mm) thickness


CUTOUT: 4" (102mm) square opening

LISTINGS: ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims

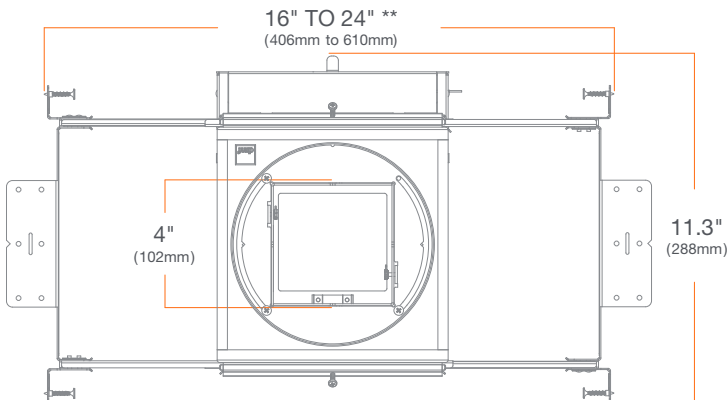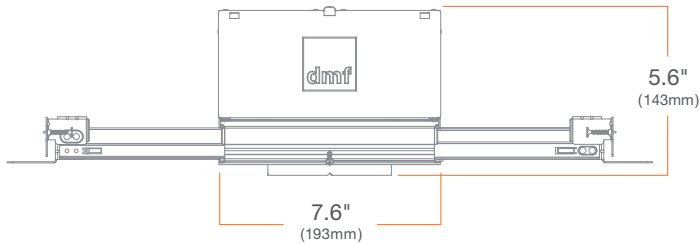

** Can be field cut to a minimum 10 1/2" (267mm) for a range of 10 1/2" (267mm) to 24" (610mm)

HOUSING

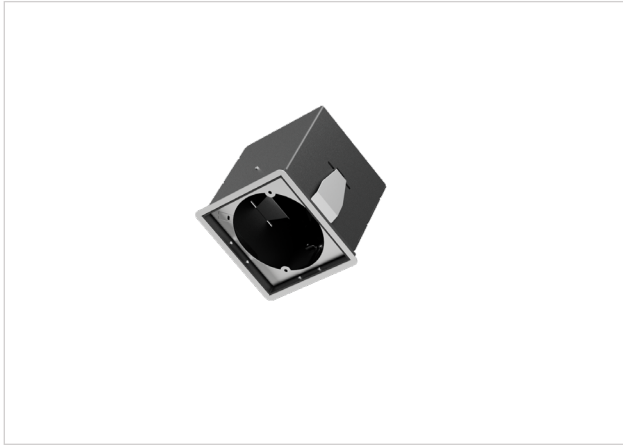

M Series

Remodel

M4RMSS (Standard)

M4RMSF (Fire Rated)

SUMMARY



JUNCTION BOX: Equipped with 8 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Pre-installed mounting spring clips

CEILING: 5/8" up to 1 1/4"

CUTOUT: 4" (102mm) square opening

LISTINGS: Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated



TRIMS



M Series

4" Square Trims

M4TS


SUMMARY

CONSTRUCTION: Die-cast aluminum

INSTALLATION: Twist & Lock


Standard

M4TSSWH

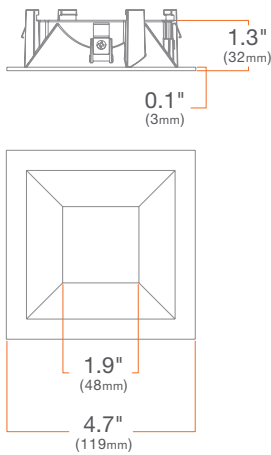



Standard Flangeless

M4TSSWHFL

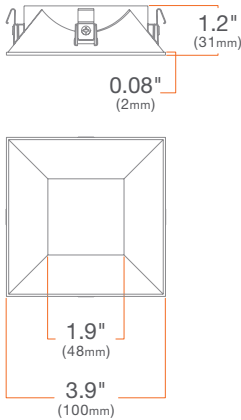



Round On Square

M4TSQWH

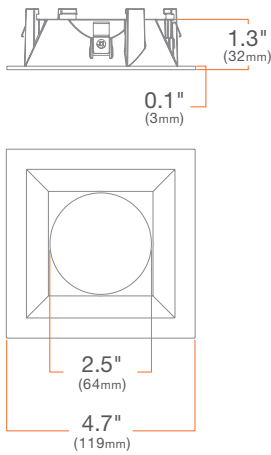



Round On Square Flangeless

M4TSQWHFL

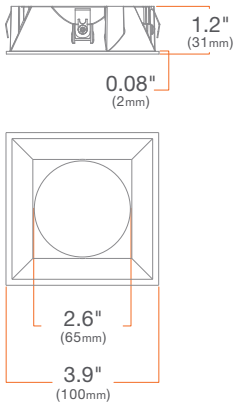



Wall Wash/Sloped Ceiling

Round: **M4TSLWH**

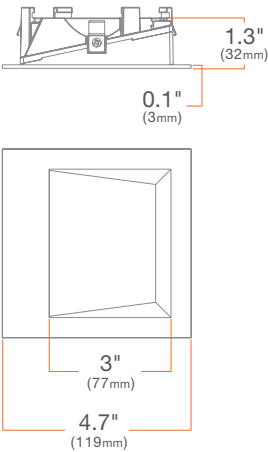


Wall Wash/Sloped Ceiling Flangeless

M4TSLWHFL

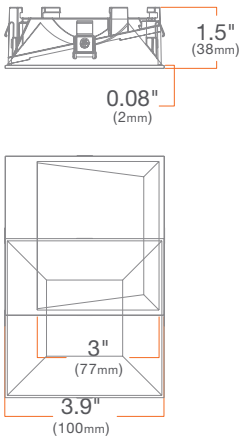


Pinhole

M4TSPWH

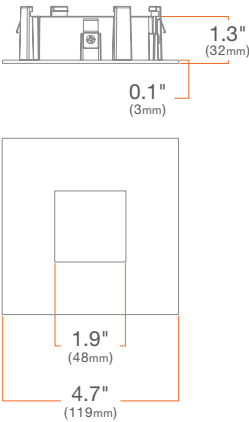

Pinhole Flangeless


M4TSPWHFL

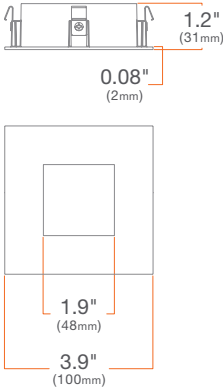

Decorative Closed

Frosted: **M4TSSWHDCF**


Clear, Frosted Sides: **M4TSSWHDCCF**

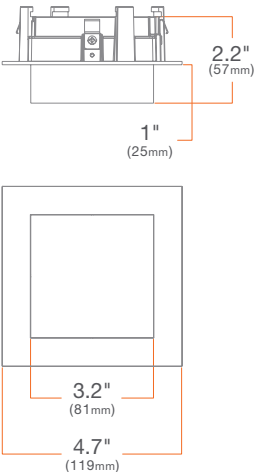

ACCESSORIES


Flangeless Mud Plate

M4XSMUD

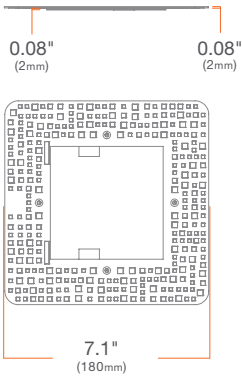

Router Template


M4KSTEMPLATE

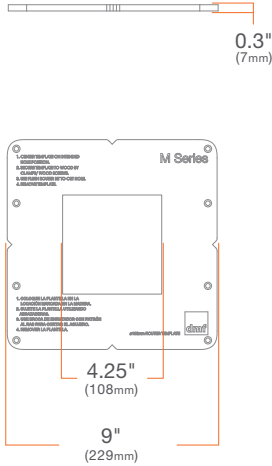

PHOTOMETRY

ART4D 1000 lm, 3000K, Spot

ART4DM10930SP

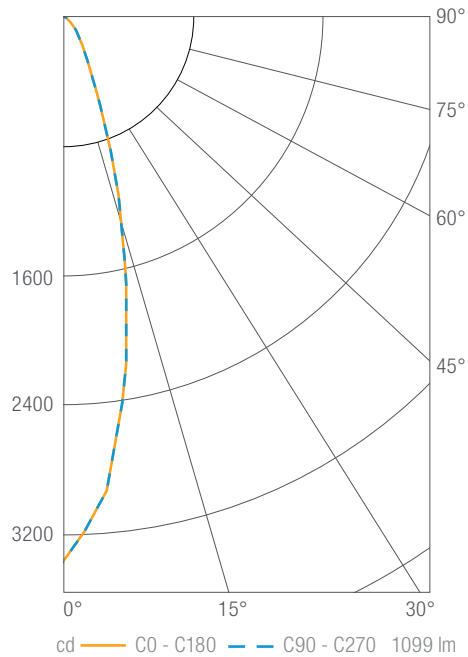

Luminous Intensity

Gamma	C 0°
0°	3366
5°	2967
10°	2203
15°	1391
20°	775
25°	419
30°	248
35°	167
40°	119
45°	87
50°	62
55°	43
60°	26
65°	15
70°	7
75°	4
80°	2
85°	1
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	862	78
0-40	971	88
0-60	1078	98
0-90	1098	100
0-180	1099	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	374	1.4'
6'	93	2.8'
9'	42	4.2'
12'	23	5.6'

Beam Angle: 26°

ART4D 1000 lm, 3000K, Flood

ART4DM10930FL

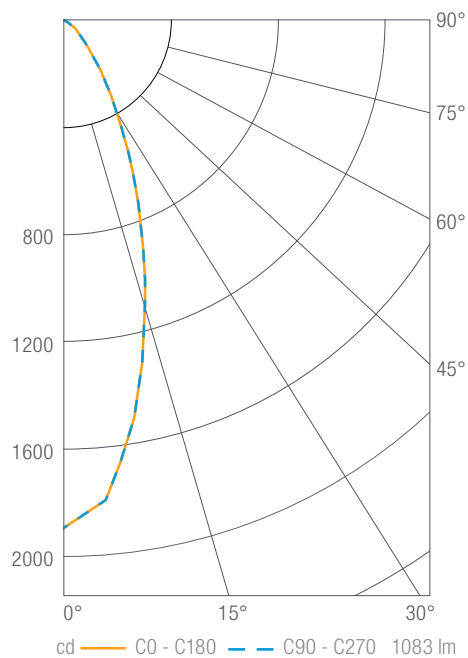

Luminous Intensity

Gamma	C 0°
0°	1890
5°	1792
10°	1503
15°	1161
20°	849
25°	589
30°	391
35°	256
40°	162
45°	107
50°	74
55°	51
60°	30
65°	18
70°	8
75°	5
80°	3
85°	1
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	760	70
0-40	925	85
0-60	1058	98
0-90	1081	100
0-180	1083	100

Illuminance Chart


Distance from LED	Foot Candles	Diameter
3'	210	2.0'
6'	52	4.0'
9'	23	6.0'
12'	13	8.0'

Beam Angle: 37°

PHOTOMETRY

ART4D 1000 lm, 3000K, Wide Flood

ART4DM10930WF

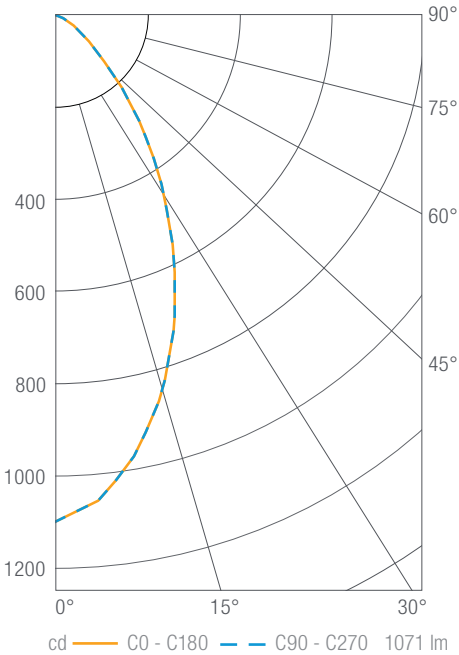

Luminous Intensity

Gamma	C 0°
0°	1100
5°	1058
10°	973
15°	866
20°	743
25°	609
30°	478
35°	361
40°	252
45°	161
50°	102
55°	68
60°	41
65°	24
70°	11
75°	6
80°	4
85°	2
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	620	58
0-40	845	79
0-60	1037	97
0-90	1069	100
0-180	1071	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	122	3.1'
6'	31	6.2'
9'	14	9.3'
12'	8	12.3'

Beam Angle: 55°

ART4D 1000 lm, 3000K, General Ambient

ART4DM10930GA

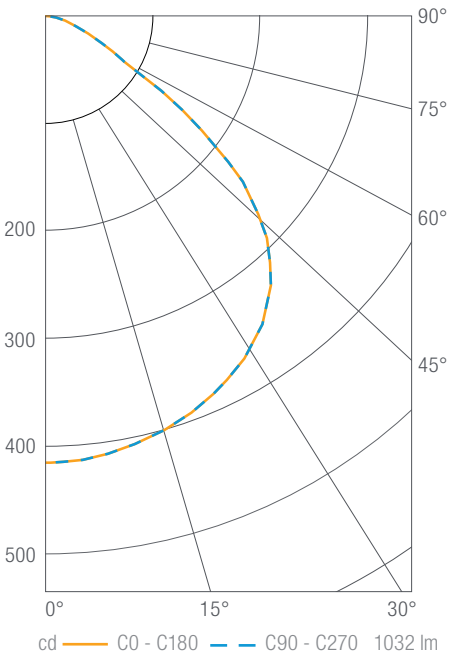

Luminous Intensity

Gamma	C 0°
0°	416
5°	415
10°	410
15°	403
20°	394
25°	382
30°	369
35°	351
40°	327
45°	291
50°	240
55°	162
60°	84
65°	54
70°	33
75°	21
80°	12
85°	6
90°	1

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	333	32
0-40	557	54
0-60	942	91
0-90	1024	99
0-180	1032	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	46	7.8'
6'	12	15.5'
9'	5	23.3'
12'	3	31.1'

Beam Angle: 100°