

Project:	Type:
Product Code:	Date:

V022626



4" Square Adjustable

- HIGH PERFORMANCE**
 Produces up to 1000 lumens of True Spectrum® lighting for natural, true-to-life colors without sacrificing stellar efficiency
- PRECISE CONTROL**
 Field-changeable light distribution ranging from 15° to 90°+
- DIM TO DARK**
 Smooth, flicker-free dimming down to 0.1% with centralized or local control
- FAST INSTALL**
 Integrated driver, plug-and-play connection, and Twist & Lock Trims
- MODULAR DESIGN**
 Flexibility during and after installation with interchangeable modules, optics and trims

INSTALLATION

Ceiling Thickness

- New Construction: 1/2" up to 1 3/4"
- Spray Foam: 1/2" up to 2"
- Remodel: 5/8" up to 1 1/4"
- Low Profile: 1/2" up to 1 1/4"
- Super Shallow: 1/2" up to 1 1/2"

Ceiling Material

- Drywall, Millwork, Concrete, Acoustic Ceiling

TRIMS

Style

- Standard, Flangeless, Round On Square, Pinhole

Finish

- White, Black, Custom Color (RAL Color)

SPECIALTY LENSE

- Hexcell Louver

LIGHT OUTPUT & DISTRIBUTION

Module

- Adjustable

Adjustment

- 360° direction aim, 45° tilt

Lumens (Power)

- 750 lm (9.5W), 1000 lm (12.5W)

Color Quality

- True Spectrum®, 2-step SDCM

Color Temperature

- 2700K

3000K

3500K
- 4000K

Warm Dim (3000K–1800K)
- Tunable White (4000K–1800K)

Beam Spread

- 15° Narrow Spot

25° Spot
- 40° Flood

60° x 30° Linear Spread
- Soft Focus

POWER & CONTROLS

Input Voltage

- 120 / 277V

Dimming

- TRIAC/ELV (1%), DALI-2 (0.1%)

RATINGS & CERTIFICATIONS

- IC (Insulation Contact) Rated
- ASTM E283 Certified Air Tight
- Chicago Plenum
- UL Listed for Damp Location
- RoHS Compliant
- DarkSky Approved
(CCT less than or equal to 3000K, non-decorative trims only)
- Code compliant for use in fire-rated assemblies up to a maximum of 2-hours

WARRANTY

- 10 year limited warranty; 50,000 hours





PRODUCT BUILDER

M SERIES HOUSING

EXAMPLE: **M4NCSS**

PRODUCT CODE		APPLICATION		SHAPE		RATING	
M4				S			
M4	4" Housing	NC	New Construction	S	Square	S	Standard
		NS	Super Shallow ^{1,2}			F	Fire Rated
		CP	Chicago Plenum ¹				
		LT	Low Profile, TRIAC/ELV (3" Plenum)				
		RM	Remodel				
		SF	Spray Foam ¹				

¹ Only available in Standard rating

² Only compatible with Flanged trims

ARTAFEX 4" ADJUSTABLE MODULE

EXAMPLE: **ART4A07T27NST**

PRODUCT CODE		LUMENS		COLORMETRIC		CCT		BEAM SPREAD		FINISH		DIMMING	
ART4A				T									
ART4A	Adjustable	07	750 lm	T	True Spectrum®	27	2700K	NS	Narrow Spot (15°) ⁵	[Blank]	Black	T	TRIAC/ELV
		10	1000 lm			30	3000K	SP	Spot (25°)	W	White	D	DALI-2 ⁹
						35	3500K	FL	Flood (40°)				
						40	4000K	LS	Linear Spread (60° x30°)				
						3W	Warm Dim ³ (3000K– 1800K)	SF	Soft Focus ⁶				
						T1	Tunable White ⁴ (4000K– 1800K)	NH	Narrow Spot w/ Hex Louver ⁷				
								SH	Spot w/ Hex Louver ⁸				
								FH	Flood w/ Hex Louver ⁸				

³ Only available in 1000 lm

⁴ Only available in 750 lm for DALI-2

⁵ Not available in Warm Dim or Tunable White

⁶ Only available in 750lm Static CCT with TRIAC Dimming and available with 1000 lm WD

⁷ Not available in Warm Dim, Tunable White or DALI-2

⁸ Not available for DALI-2

⁹ Only available in 750 lm Tunable White, and 1000 lm Warm Dim or Static CCT

M SERIES TRIM & ACCESSORY

EXAMPLE: **M4TSQWH**

PRODUCT CODE		FINISH		OPTION	
M4TSQ	Round on Square	WH	White	[Blank]	None
M4TSP	Pinhole ¹⁰	BK	Black	FL	Flangeless ^{10,12}
		BZ	Bronze ¹¹		
		CD	Clear Diffuse ¹¹		
		CC	Custom Color (RAL Colors)		

M4XSMUD	Flangeless Mud Plate <i>(Required for flangeless drywall application)</i>
M4KSTEMPLATE	Wood Template <i>(Recommended for flangeless trim wood installation)</i>

¹⁰ Only available in White or Black finish

¹¹ Bronze is available for both round on square and round on square Flangeless;
Clear Diffuse is available for round on square only (not Flangeless)

¹² Mud plate is required for all FL trims except for wood ceiling applications;
Not compatible with Remodel, Spray foam or Super Shallow housing




PRODUCT BUILDER

OPTICS ACCESSORIES

PRODUCT CODE	
DID4X-NS	Adjustable Narrow Spot (15°)
DID4X-SP	Adjustable Spot (25°)
DID4X-FL	Adjustable Flood (40°)
DID4X-LS	Adjustable Linear Spread (60° x 30°)
DID4X-SF	Adjustable Soft Focus
DID4X-OP	Adjustable Optics Kit: Narrow Spot (15°), Spot (25°), Flood (40°), Linear Spread (60° x 30°), Soft Focus

MODULE

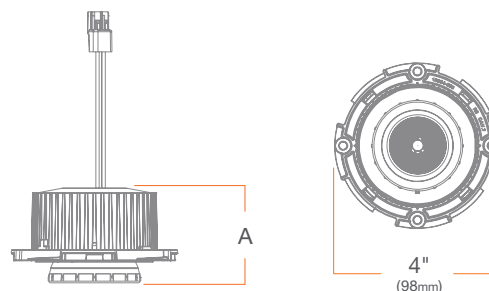

Measurements

A

Standard

2 3/8" [60 mm]

DALI-2

2 1/2" [64 mm]

SUMMARY



	STATIC CCT	WARM DIM	TUNABLE WHITE
CCT	2700K, 3000K, 3500K, 4000K	3000K - 1800K	4000K - 1800K
LUMENS (POWER)	750 lm (9.5W), 1000 lm (12.5W)	1000 lm (12.5W)	750 lm (12.5W)
EFFICACY	78 lm/W, 80 lm/W	80 lm/W	60 lm/W
COLOR QUALITY	True Spectrum® 98 CRI, 2-step SDCM	True Spectrum® 93 CRI, 2-step SDCM	True Spectrum® 93 CRI, 3-step SDCM
BEAM SPREAD	Narrow Spot (15°), Spot (25°), Flood (40°), Linear Spread (60° x 30°), Soft Focus	Spot (25°), Flood (40°), Linear Spread (60° x 30°)	Spot (25°), Flood (40°), Linear Spread (60° x 30°)
DIMMING	TRIAC/ELV ¹ , DALI-2	TRIAC/ELV ¹ , DALI-2	DALI-2
LED CHIP	Cree Pro 9	Bridgelux	Bridgelux
LISTINGS	ENERGY STAR® qualified ² , California Title 24 2016-2022 JA8-E compliant, UL Listed for Damp Location, UL Certified US-CA, Declare, RoHS compliant, DALI-2 Compliant, Dark Sky Compliant ³		
ADJUSTMENT	360° directional aim, 45° tilt		
SLOPE CEILING COMPATIBILITY	Up to 45°		

¹ Dimming at 120V only² Refer to ENERGY STAR Certified light fixtures database³ DarkSky Approved is only applicable to CCT Options less than or equal to 3000K

ADDITIONAL

INPUT VOLTAGE: 120/277V, 50/60Hz**MAX INPUT CURRENT (120V):** 0.13 amps**MAX INPUT CURRENT (277V):** 0.065 amps**CONNECTOR:** PowerPlug® Luminaire Disconnect Model 182, 6-pin Molex**POWER FACTOR:** Greater than 0.9**TOTAL HARMONIC DISTORTION:** Less than 20%**AMBIENT OPERATING TEMPERATURE:** -20°C to 40°C**WARRANTY:** 10 year limited warranty; 50,000 hours at 70% lumen maintenance

HOUSING

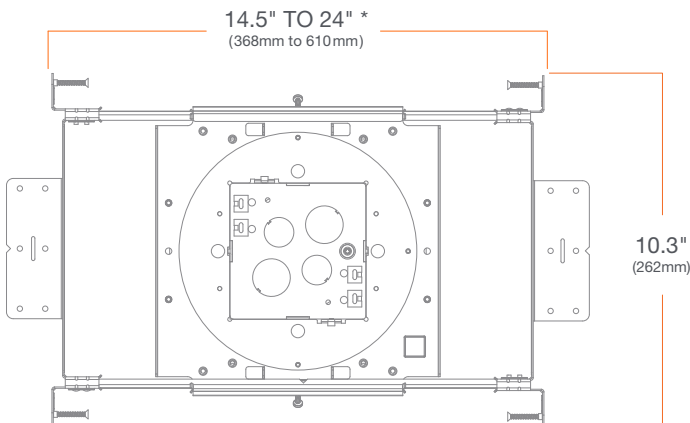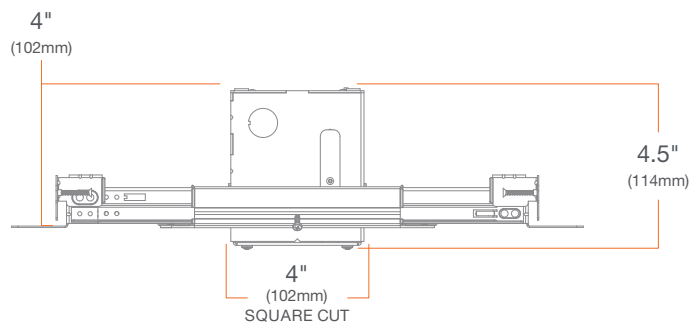

* Can be field cut to minimum 10" (254mm) for a range of 10" (254mm) - 24" (610mm)

M Series

New Construction

M4NCSS (Standard)

M4NCSF (Fire Rated)

M4CPSS (Chicago Plenum)

SUMMARY

JUNCTION BOX: Equipped with 12 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Adjustable Bar Hangers compatible with traditional joists, Armstrong™, Hat Channel, and T-Bar can accommodate the following spacing:

Standard (Deep): 7 1/2" (191mm) to 24" (610mm)

Low Profile Version: 9" (229mm) to 24" (610mm)

Super Shallow: 9 3/8" (238mm) - 24" (610mm)

CEILING: Pre-installed mounting brackets allow vertical adjustment of bar hangers up to 1 1/4" (32mm)
Standard Version (Deep): 1/2" (13mm) to 1 3/4" (44mm)
Low Profile Version: 1/2" (13mm) to 1 1/4" (32mm)
Super Shallow: 1/2" (13mm) - 1 1/2" (38mm)

CUTOUT: 4" (102mm) square opening

LISTINGS: Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated

ALTERNATE DIMMING SPECIFICATIONS

INPUT VOLTAGE: 120/277V, 50/60Hz

MAX INPUT CURRENT (120V): 0.090 amps, 0.107 amps

MAX INPUT CURRENT (277V): 0.042 amps, 0.050 amps


POWER FACTOR: Greater than 0.9

TOTAL HARMONIC DISTORTION: Less than 20%

Low-Profile

M4LTSS (Standard)

M4LTSF (Fire Rated)

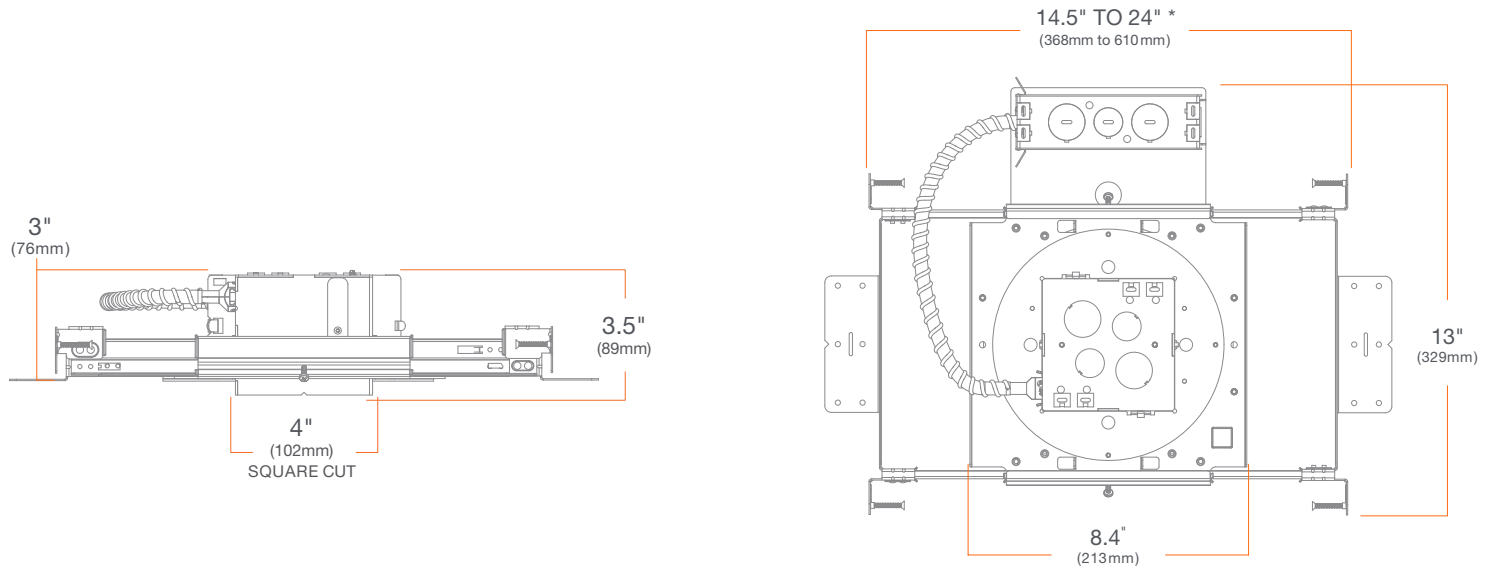


* Can be field cut to minimum 10" (229mm) for a range of 10" (254mm) - 24" (610mm)

Super Shallow


M4NSSS + Adjustable Module

(Pre-set to 3" plenum depth at factory)

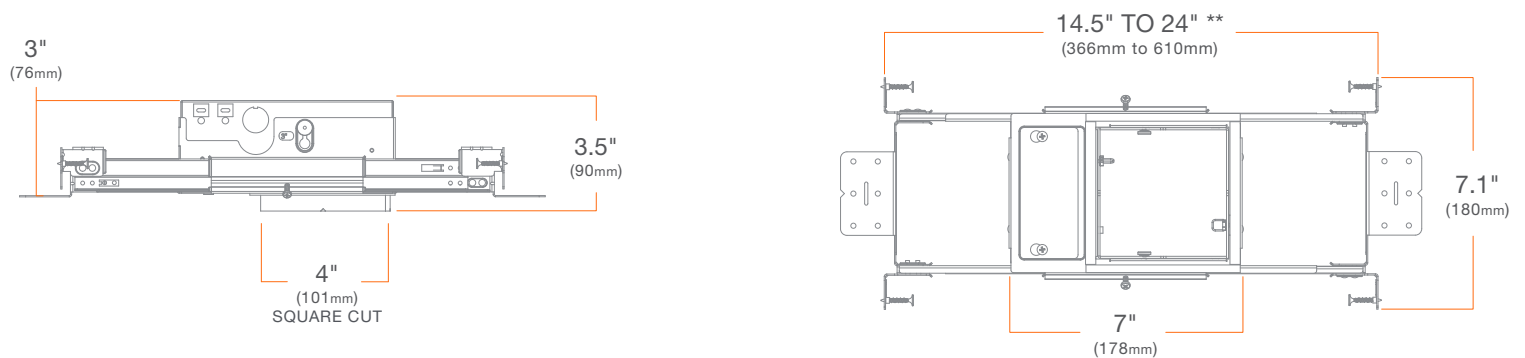

** Can be field cut to a minimum 10" (254mm) for a range of 10" (254mm) to 24" (610mm)

HOUSING

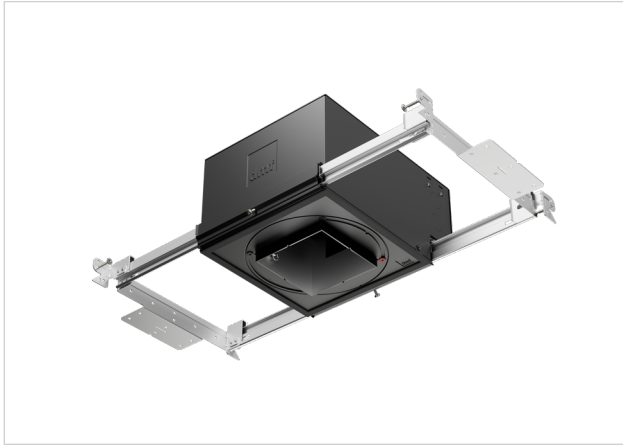

M Series

Spray Foam

M4SFRS

SUMMARY



JUNCTION BOX: Equipped with six knockouts: four 1/2" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70° C

MOUNTING: Adjustable Bar Hanger for 10.5" (267mm) to 24" (610mm) joist spacing. Compatible with traditional joists, Armstrong TM ceiling, Hat Channel and T-bar

CEILING: Center Collar allows for vertical adjustment to accommodate from 1/2" (13mm) to 2" (51mm) thickness


CUTOUT: 4" (102mm) square opening

LISTINGS: ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims

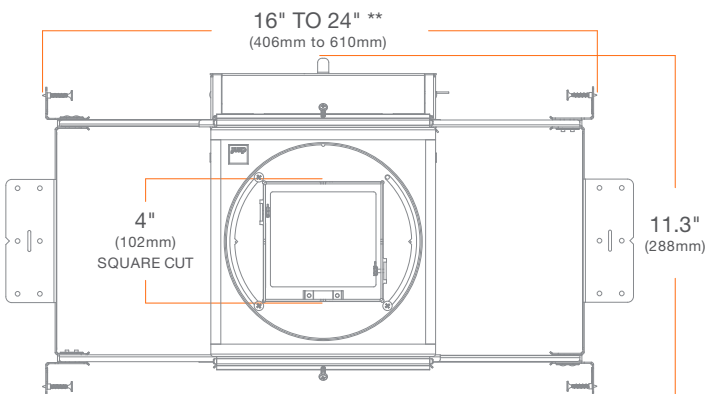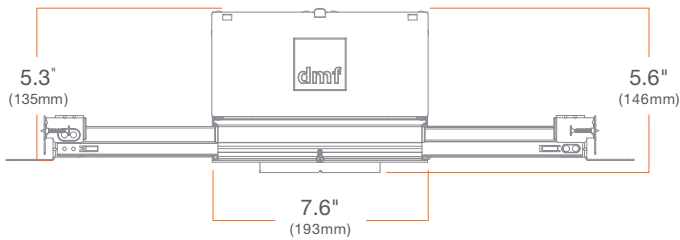

** Can be field cut to a minimum 10 1/2" (267mm) for a range of 10 1/2" (267mm) to 24" (610mm)

HOUSING

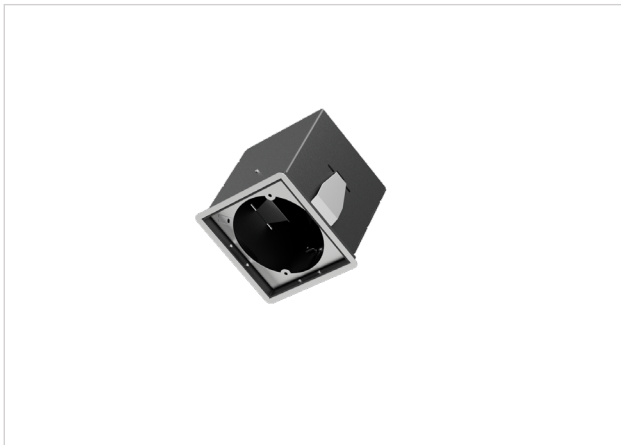

M Series

Remodel

M4RMSS (Standard)

M4RMSF (Fire Rated)

SUMMARY



JUNCTION BOX: Equipped with 8 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

MOUNTING: Pre-installed mounting spring clips

CEILING: 5/8" (16mm) up to 1 1/4" (32mm)

CUTOUT: 4" (102mm) square opening

LISTINGS: Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated



TRIMS



M Series

4" Square Trims

M4TS


SUMMARY

CONSTRUCTION: Die-cast aluminum

INSTALLATION: Twist & Lock



Round On Square

M4TSQWH

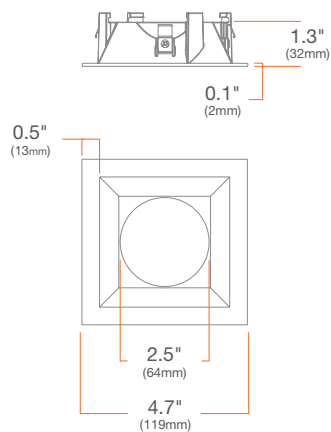


Round On Square Flangeless

M4TSQWHFL

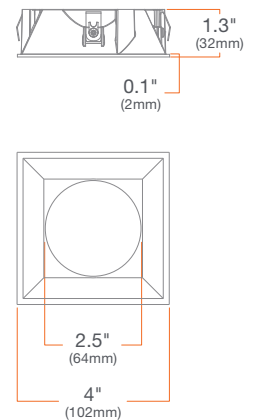


Pinhole

M4TSPWH

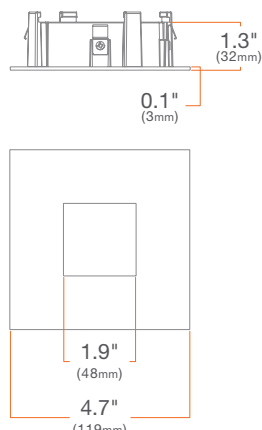

Pinhole Flangeless


M4TSPWHFL

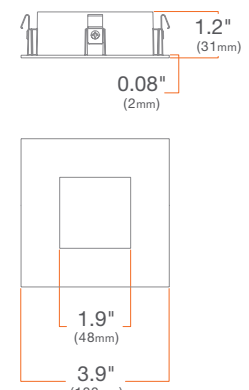

ACCESSORIES


Flangeless Mud Plate

M4XSMUD

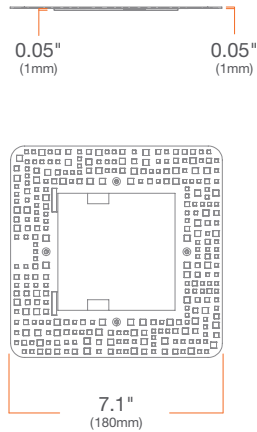

Router Template


M4KSTEMPLATE

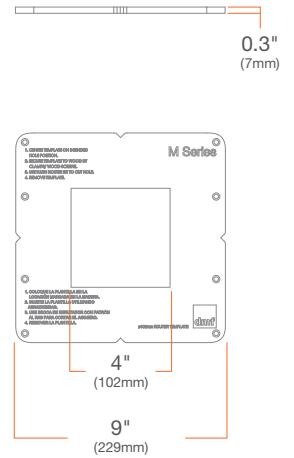

Retrofit Kit - 6" to 4"

** Please refer to individual retrofit spec sheet*

M4KSRETRO6

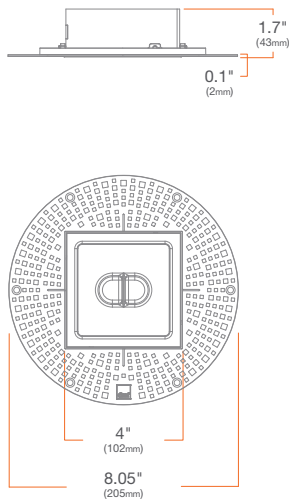




PHOTOMETRY

ART4A 750 lm, 3000K, Narrow Spot

ART4AM07930NS

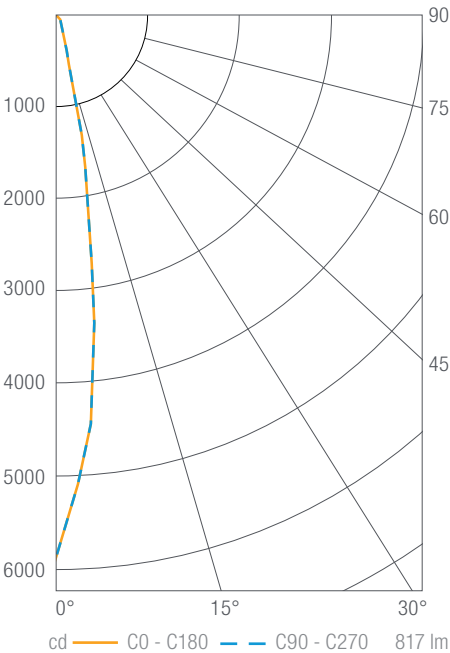

Gamma	C 0°
0°	5897
5°	4418
10°	1911
15°	561
20°	280
25°	165
30°	117
35°	87
40°	69
45°	57
50°	47
55°	38
60°	31
65°	23
70°	16
75°	10
80°	4
85°	1
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	645	79
0-40	701	86
0-60	781	96
0-90	817	100
0-180	817	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	655	0.8'
6'	164	1.7'
9'	73	2.5'
12'	41	3.3'

Beam Angle: 16°

ART4A 750 lm, 3000K, Spot

ART4AM07930SP

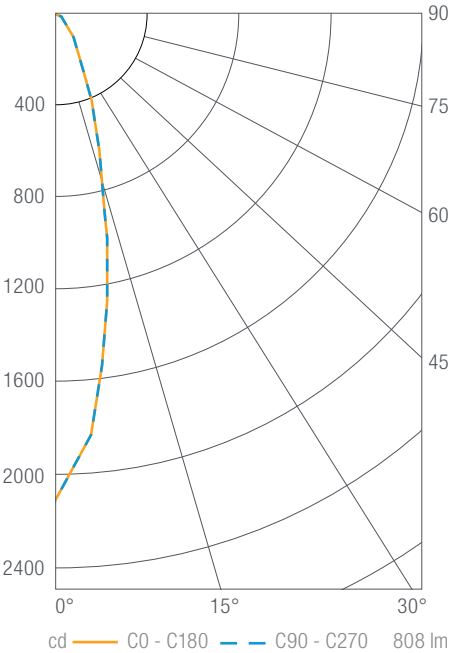

Gamma	C 0°
0°	2105
5°	1826
10°	1282
15°	800
20°	497
25°	310
30°	201
35°	137
40°	98
45°	73
50°	57
55°	45
60°	35
65°	23
70°	12
75°	5
80°	3
85°	2
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	573	71
0-40	668	83
0-60	773	96
0-90	808	100
0-180	808	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	234	1.3'
6'	58	2.6'
9'	26	3.9'
12'	15	5.2'

Beam Angle: 28°

PHOTOMETRY

ART4A 750 lm, 3000K, Flood
ART4AM07930FL

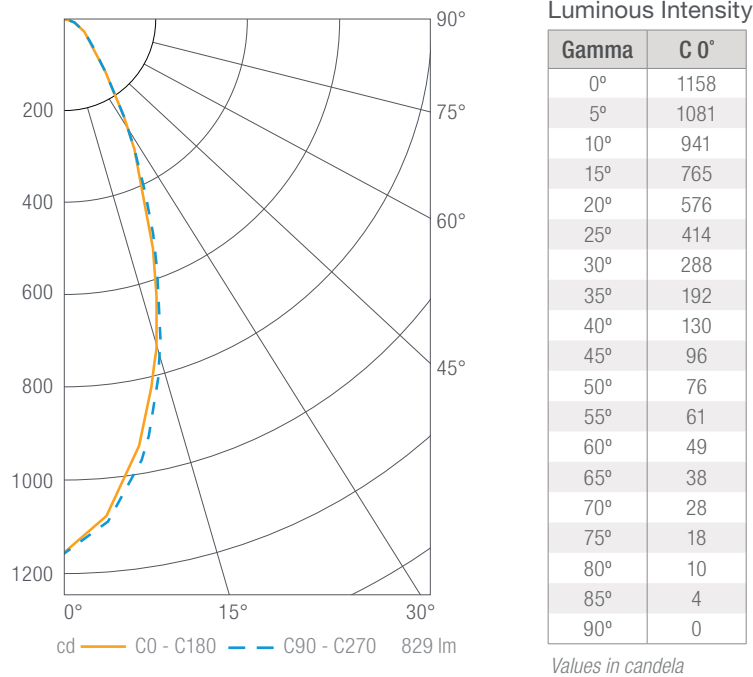

Zonal Lumen Summary


Zone	Lumens	Luminaire %
0-30	510	62
0-40	633	76
0-60	766	92
0-90	829	100
0-180	829	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	129	2.2'
6'	32	4.5'
9'	14	6.7'
12'	8	9.0'

Beam Angle: 41°

ART4A 750 lm, 3000K, Linear Spread
ART4AM07930LS

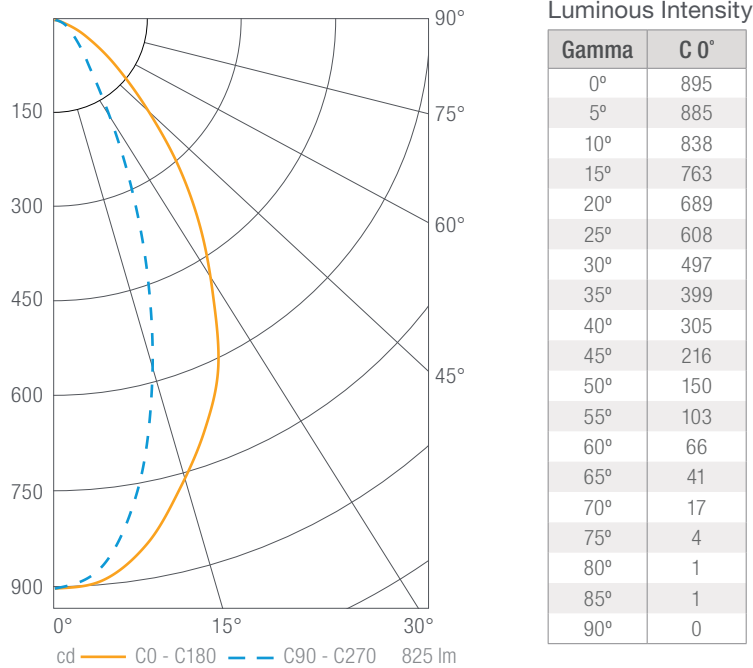

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	468	57
0-40	626	76
0-60	790	96
0-90	825	100
0-180	825	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	99.5	3.8'
6'	24.9	7.7'
9'	11.1	11.5'
12'	6.2	15.3'

Beam Angle: 38°

PHOTOMETRY

ART4A 750 lm, 3000K, Soft Focus
ART4AM07930SF

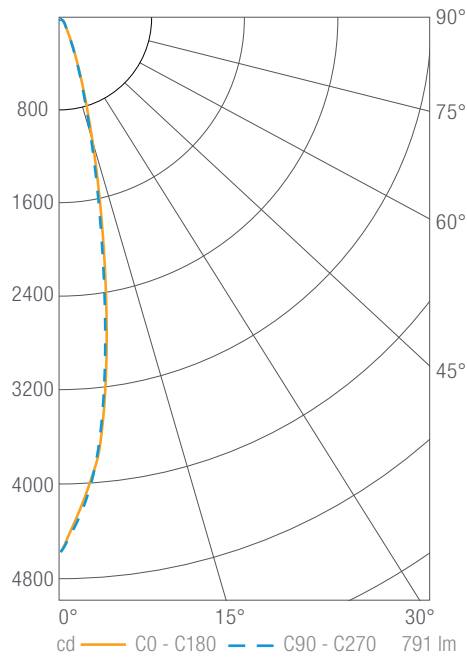

Luminous Intensity

Gamma	C 0°
0°	4451
5°	3648
10°	2150
15°	1009
20°	465
25°	227
30°	125
35°	82
40°	62
45°	49
50°	40
55°	32
60°	25
65°	17
70°	9
75°	3
80°	1
85°	1
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	661	84
0-40	710	90
0-60	771	97
0-90	791	100
0-180	791	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	495	1.0'
6'	124	2.1'
9'	55	3.1'
12'	31	4.1'

Beam Angle: 19°