

|               |       |
|---------------|-------|
| Project:      | Type: |
| Product Code: | Date: |

V022626



4" Square Downlight

- HIGH PERFORMANCE** Produces up to 1500 lumens of True Spectrum® lighting for natural, true-to-life colors without sacrificing stellar efficiency
- PRECISE CONTROL** Field-changeable light distribution ranging from 15° to 90°+
- DIM TO DARK** Smooth, flicker-free dimming with centralized or local control
- FAST INSTALL** Integrated driver, plug-and-play connection, and Twist & Lock Trims
- MODULAR DESIGN** Flexibility during and after installation with interchangeable modules, optics and trims

INSTALLATION

Ceiling Thickness

- New Construction: 1/2" up to 1 3/4"
- Spray Foam: 1/2" up to 2"
- Remodel: 5/8" up to 1 1/4"
- Low Profile: 1/2" up to 1 1/4"
- Super Shallow: 1/2" up to 1 1/2"

Ceiling Material

Drywall, Millwork, Concrete, Acoustic Ceiling

TRIMS

Style

Standard, Flangeless, Round On Square, Wall Wash/Sloped Ceiling, Pinhole, Decorative

Finish

White, Black, Bronze, Clear Diffuse, Custom Color (RAL Colors)

LIGHT OUTPUT & DISTRIBUTION

Module

Downlight

Lumens (Power)

750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W-TRIAC, 14.5W-DALI), 1500 lm (14.3W)

Color Quality

True Spectrum®, 2-step SDCM

Color Temperature

- 2700K 3000K 3500K
- 4000K Warm Dim (3000K–1800K)
- Tunable White (4000K–1800K)

Beam Spread

- 15° Narrow Spot
- 25° Spot
- 40° Flood
- 60° Wide Flood
- 90°+ General
- 40° x 20° Linear Spread
- Soft Focus

POWER & CONTROLS

Input Voltage

120 / 277V

Dimming

TRIAC/ELV (1%), DALI-2 (0.1%)

RATINGS & CERTIFICATIONS

- IC (Insulation Contact) Rated
- ASTM E283 Certified Air Tight
- Chicago Plenum
- UL Listed for Wet Location <sup>1</sup>
- RoHS Compliant
- DarkSky Approved <sup>2</sup>
- Code compliant for use in fire-rated assemblies up to a maximum of 2-hours
- NSF Listed <sup>3</sup>

<sup>1</sup> Flanged trims, under covered areas only

<sup>2</sup> CCT less than or equal to 3000K, non-decorative trims only

<sup>3</sup> White and Black Finish Only

WARRANTY

10 year limited warranty; 50,000 hours



## PRODUCT BUILDER

### HOUSING

EXAMPLE: **M4NCSS**

| PRODUCT CODE |            | APPLICATION |                                    | SHAPE    |        | RATING   |            |
|--------------|------------|-------------|------------------------------------|----------|--------|----------|------------|
| <b>M4</b>    |            |             |                                    | <b>S</b> |        |          |            |
| <b>M4</b>    | 4" Housing | <b>NC</b>   | New Construction                   | <b>S</b> | Square | <b>S</b> | Standard   |
|              |            | <b>NS</b>   | Super Shallow <sup>1,2</sup>       |          |        | <b>F</b> | Fire Rated |
|              |            | <b>CP</b>   | Chicago Plenum <sup>1</sup>        |          |        |          |            |
|              |            | <b>LT</b>   | Low Profile, TRIAC/ELV (3" Plenum) |          |        |          |            |
|              |            | <b>RM</b>   | Remodel                            |          |        |          |            |
|              |            | <b>SF</b>   | Spray Foam <sup>1</sup>            |          |        |          |            |

<sup>1</sup> Only available in Standard rating  
<sup>2</sup> Only compatible with Flanged trims

### ARTAFEX MODULE

EXAMPLE: **ART4D07T27GAT**

| PRODUCT CODE |           | LUMENS    |                        | CRI      |                | CCT       |                                              | BEAM SPREAD |                                | FINISH         |       | DIMMING  |                     |
|--------------|-----------|-----------|------------------------|----------|----------------|-----------|----------------------------------------------|-------------|--------------------------------|----------------|-------|----------|---------------------|
| <b>ART4D</b> |           |           |                        | <b>T</b> |                |           |                                              |             |                                | <b>-</b>       |       |          |                     |
| <b>ART4D</b> | Downlight | <b>07</b> | 750 lm                 | <b>T</b> | True Spectrum® | <b>27</b> | 2700K                                        | <b>GA</b>   | General Ambient (90°+)         | <b>[Blank]</b> | Black | <b>T</b> | TRIAC/ELV           |
|              |           | <b>10</b> | 1000 lm                |          |                | <b>30</b> | 3000K                                        | <b>NS</b>   | Narrow Spot (15°) <sup>6</sup> |                |       | <b>D</b> | DALI-2 <sup>7</sup> |
|              |           | <b>12</b> | 1250 lm <sup>3,6</sup> |          |                | <b>35</b> | 3500K                                        | <b>SP</b>   | Spot (25°)                     |                |       |          |                     |
|              |           | <b>15</b> | 1500 lm <sup>3,6</sup> |          |                | <b>40</b> | 4000K                                        | <b>FL</b>   | Flood (40°)                    |                |       |          |                     |
|              |           |           |                        |          |                | <b>3W</b> | Warm Dim <sup>4</sup><br>(3000K– 1800K)      | <b>WF</b>   | Wide Flood (60°)               |                |       |          |                     |
|              |           |           |                        |          |                | <b>T1</b> | Tunable White <sup>5</sup><br>(4000K– 1800K) | <b>LS</b>   | Linear Spread (40° x 20°)      |                |       |          |                     |
|              |           |           |                        |          |                |           |                                              | <b>SF</b>   | Soft Focus                     |                |       |          |                     |

<sup>3</sup> Not available in DALI-2 with fixed CCT  
<sup>4</sup> Only available in 1000 lm; Not available in Soft Focus  
<sup>5</sup> Downlight only available in 1000 lm for DALI-2; Not available in Soft Focus and Narrow Spot beam spread  
<sup>6</sup> Not available in Warm Dim or Tunable White  
<sup>7</sup> Only available in 1000lm for Tunable White or Warm Dim, and 1250 lm Static CCT

### TRIM

EXAMPLE: **M4TSSWH**

| PRODUCT CODE |                                         | FINISH    |                             | OPTION         |                                                                |
|--------------|-----------------------------------------|-----------|-----------------------------|----------------|----------------------------------------------------------------|
|              |                                         |           |                             |                |                                                                |
| <b>M4TSS</b> | Standard                                | <b>WH</b> | White                       | <b>[Blank]</b> | None                                                           |
| <b>M4TSQ</b> | Round on Square                         | <b>BK</b> | Black                       | <b>DCF</b>     | Decorative: Closed, Frosted <sup>4,9,11,12</sup>               |
| <b>M4TSP</b> | Pinhole <sup>8</sup>                    | <b>BZ</b> | Bronze                      | <b>DCC</b>     | Decorative: Closed, Clear, Frosted Side <sup>4,9,11,12</sup>   |
| <b>M4TSL</b> | Wall Wash / Sloped Ceiling <sup>9</sup> | <b>CW</b> | Clear Diffuse, White Flange | <b>DCCF</b>    | Decorative: Closed, Clear, Frosted Inside <sup>4,9,11,12</sup> |
|              |                                         | <b>CC</b> | Custom Color <sup>10</sup>  | <b>FL</b>      | Flangeless <sup>8,13,14,15</sup>                               |

|                     |                                                                           |
|---------------------|---------------------------------------------------------------------------|
| <b>M4XSMUD</b>      | Flangeless Mud Plate <i>(Required for flangeless drywall application)</i> |
| <b>M4KSTEMPLATE</b> | Wood Template <i>(Recommended for flangeless trim wood installation)</i>  |

<sup>8</sup> Only available in White and Black finish  
<sup>9</sup> Only available for General Ambient beam spread  
<sup>10</sup> Only available for Standard Square and Round on Square  
<sup>11</sup> Only available in White finish  
<sup>12</sup> Only available in Standard style  
<sup>13</sup> Not available for Square Conversion Trim or Concrete Construction Housing  
<sup>14</sup> Mudplate is required to all Flangeless Trims except for wood ceiling applications  
<sup>15</sup> Not compatible with Square Spray Foam and Super Shallow housing



PRODUCT BUILDER

OPTICS ACCESSORIES


EXAMPLE: DID2X-GA

PRODUCT CODE

|          |                                                                                                                       |
|----------|-----------------------------------------------------------------------------------------------------------------------|
| DID2X-GA | Fixed Conversion Kit: Artafex 4" Downlight Module to General Ambient (90°+)                                           |
| DID2X-NS | Fixed Narrow Spot (15°)                                                                                               |
| DID2X-SP | Fixed Spot (25°)                                                                                                      |
| DID2X-FL | Fixed Flood (40°)                                                                                                     |
| DID2X-WF | Fixed Wide Flood (60°)                                                                                                |
| DID2X-LS | Fixed Linear Spread (40° x 20°)                                                                                       |
| DID2X-SF | Fixed Soft Focus                                                                                                      |
| DID2X-OP | Fixed Optics Kit: Narrow Spot (15°), Spot (25°), Flood (40°), Wide Flood (60°), Linear Spread (40° x 20°), Soft Focus |



DOWNLIGHT MODULE

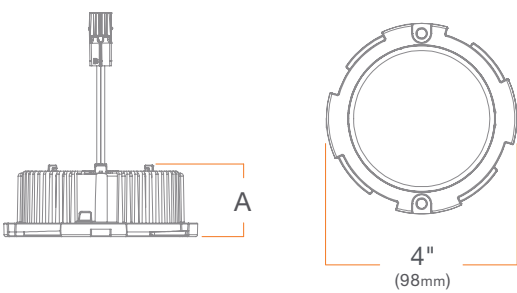

| Measurements | A               |
|--------------|-----------------|
| Standard     | 1 7/16" [37 mm] |
| DALI-2       | 2" [50 mm]      |

SUMMARY

|                | STANDARD STATIC CCT                                                                                                                                                                                                                                                        | WARM DIM                           | TUNABLE WHITE                      |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|
| CCT            | 2700K, 3000K, 3500K, 4000K                                                                                                                                                                                                                                                 | 3000K - 1800K                      | 4000K - 1800K                      |
| LUMENS (POWER) | 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W TRIAC, 14.5W DALI), 1500 lm (14.3W) <sup>1</sup>                                                                                                                                                                            | 1000 lm (12.5W)                    | 1000 lm (14.5W)                    |
| EFFICACY       | 79 lm/W, 80 lm/W, 87 lm/W, 104 lm/W                                                                                                                                                                                                                                        | 83 lm/W                            | 69 lm/W                            |
| COLOR QUALITY  | True Spectrum® 98 CRI, 2-step SDCM                                                                                                                                                                                                                                         | True Spectrum® 93 CRI, 2-step SDCM | True Spectrum® 93 CRI, 3-step SDCM |
| DIMMING        | TRIAC/ELV, DALI-2                                                                                                                                                                                                                                                          | TRIAC/ELV, DALI-2                  | DALI-2                             |
| LED CHIP       | Cree Pro9                                                                                                                                                                                                                                                                  | Bridgelux                          | Bridgelux                          |
| BEAM SPREAD    | General Ambient (90°+), Narrow Spot (15°), Spot (25°), Flood (40°), Wide Flood (60°), Linear Spread (40° x 20°), Soft Focus                                                                                                                                                |                                    |                                    |
| LISTINGS       | ENERGY STAR® qualified <sup>2</sup> , California Title 24 2016-2022 JA8-E compliant, UL Listed for Wet Location, UL Certified US-CA, Declare, RoHS compliant, NSF/ANSI 2 listed, suitable for splash-zone <sup>3</sup> , DALI-2 Compliant, Dark Sky Compliant <sup>4</sup> |                                    |                                    |

<sup>1</sup> 1500 lm module is 93 CRI

<sup>2</sup> Refer to ENERGY STAR Certified light fixtures database



<sup>3</sup> This product is evaluated in accordance to NSF/ANSI 2 for Splash Zone having designated trim finishes

<sup>4</sup> DarkSky Approved is only applicable to CCT Options less than or equal to 3000K

ADDITIONAL

|                                                                   |                                                                           |
|-------------------------------------------------------------------|---------------------------------------------------------------------------|
| INPUT VOLTAGE: 120/277V, 50/60Hz                                  | POWER FACTOR: Greater than 0.9                                            |
| MAX INPUT CURRENT (120V): 0.13 amps                               | TOTAL HARMONIC DISTORTION: Less than 20%                                  |
| MAX INPUT CURRENT (277V): 0.065 amps                              | AMBIENT OPERATING TEMPERATURE: -20°C to 40°C                              |
| CONNECTOR: PowerPlug® Luminaire Disconnect Model 182, 6-pin Molex | WARRANTY: 10 year limited warranty; 50,000 hours at 70% lumen maintenance |

## HOUSING

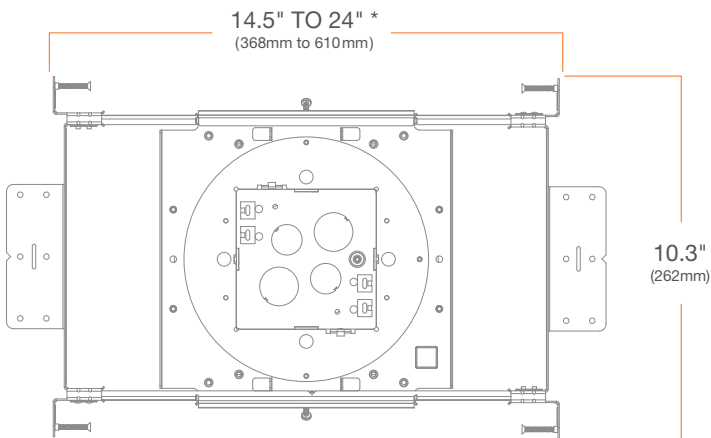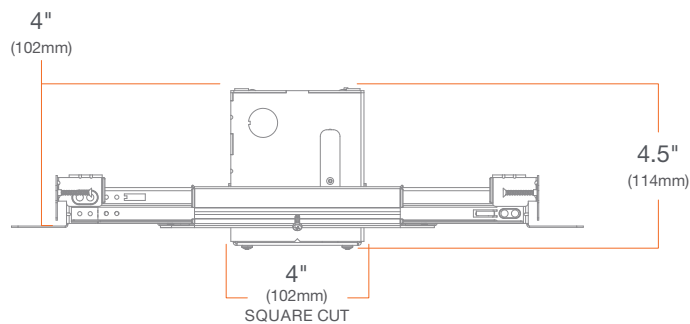

\* Can be field cut to minimum 10" (254mm) for a range of 10" (254mm) - 24" (610mm)

## M Series

New Construction

**M4NCSS (Standard)**

**M4NCSF (Fire Rated)**

**M4CPSS (Chicago Plenum)**

### SUMMARY

**JUNCTION BOX:** Equipped with 12 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

**MOUNTING:** Adjustable Bar Hangers compatible with traditional joists, Armstrong™, Hat Channel, and T-Bar can accommodate the following spacing:

Standard (Deep): 7 1/2" (191mm) to 24" (610mm)

Low Profile Version: 9" (229mm) to 24" (610mm)

Super Shallow: 9 3/8" (238mm) - 24" (610mm)



**CEILING:** Pre-installed mounting brackets allow vertical adjustment of bar hangers up to 1 1/4" (32mm)  
Standard Version (Deep): 1/2" (13mm) to 1 3/4" (44mm)  
Low Profile Version: 1/2" (13mm) to 1 1/4" (32mm)  
Super Shallow: 1/2" (13mm) - 1 1/2" (38mm)

**CUTOUT:** 4" (102mm) square opening

**LISTINGS:** Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated

## Low-Profile

**M4LTSS (Standard)**  
**M4LTSF (Fire Rated)**


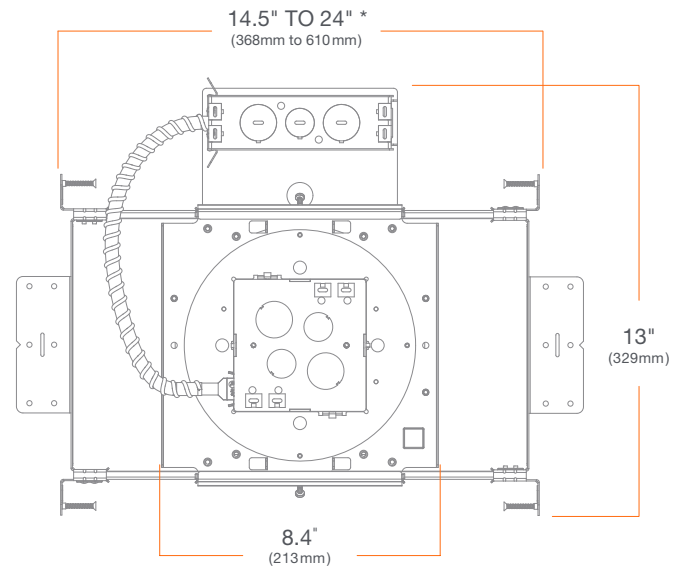
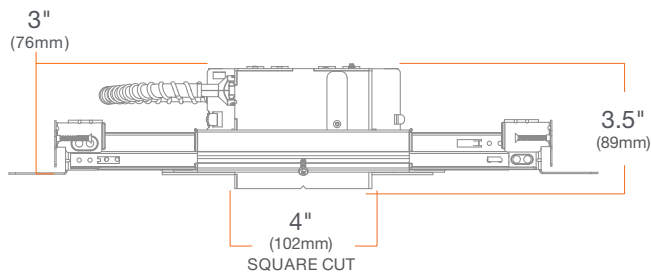


\* Can be field cut to minimum 10" (254mm) for a range of 10" (254mm) - 24" (610mm)


## Super Shallow

**M4NSSS**

**M4NSSS + Standard TRIAC/ELV or 0-10V Dimming**  
(Can be set to 2.5" plenum depth on-site)

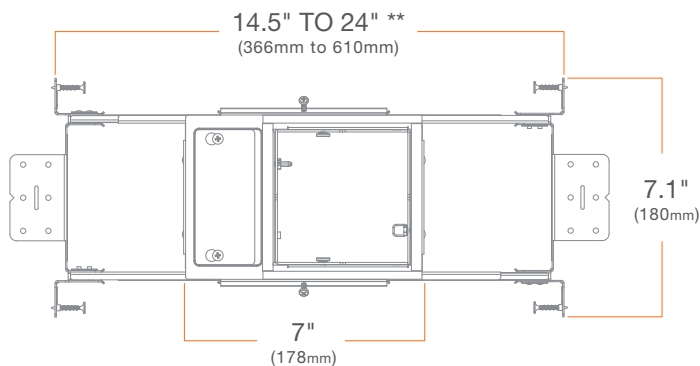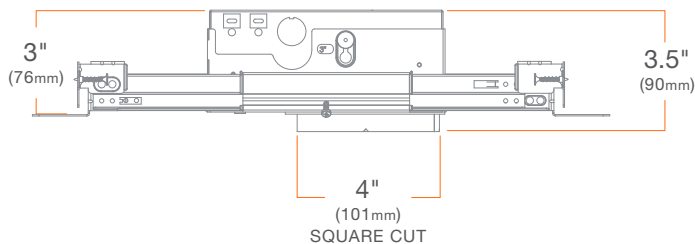


**M4NSSS + DALI-2 Dimming Modules**  
(Pre-set to 3" plenum depth at factory)

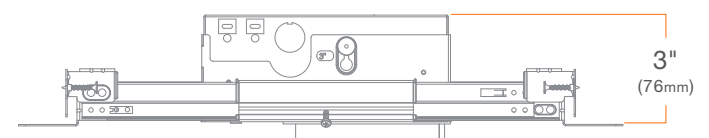

\*\* Can be field cut to a minimum 10" (254mm) for a range of 10" (254mm) to 24" (610mm)

## HOUSING

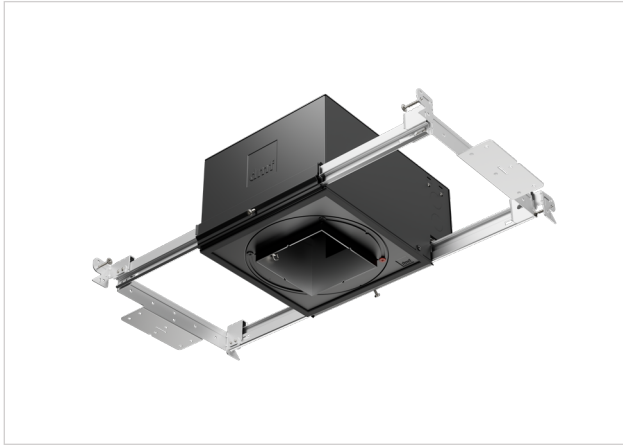

## M Series

Spray Foam

M4SFRS

## SUMMARY



**JUNCTION BOX:** Equipped with six knockouts: four 1/2" trade size knockouts, two 3/4" trade size knockouts, and four romex knockouts. Approved for 8 (four in, four out) #12 AWG 70° C

**MOUNTING:** Adjustable Bar Hanger for 10.5" (267mm) to 24" (610mm) joist spacing. Compatible with traditional joists, Armstrong TM ceiling, Hat Channel and T-bar

**CEILING:** Center Collar allows for vertical adjustment to accommodate from 1/2" (13mm) to 2" (51mm) thickness


**CUTOUT:** 4" (102mm) square opening

**LISTINGS:** ASTM E283 certified Air Tight, IC (Insulation Contact) up to R-32 for Roll, Batt, and Loose Fill, up to R-60 Spray Foam with standard trims, up to R-32 Spray Foam with other trims

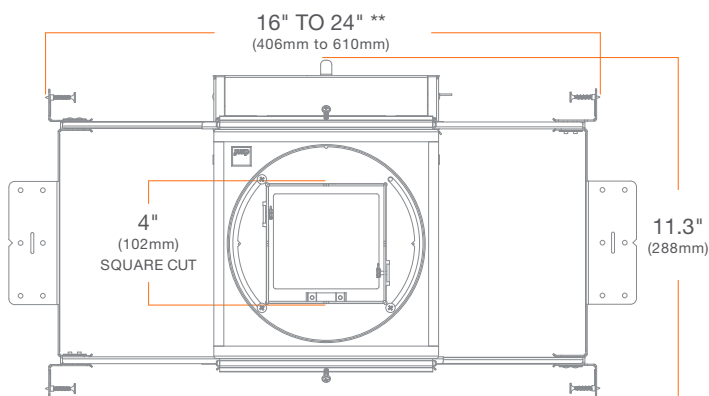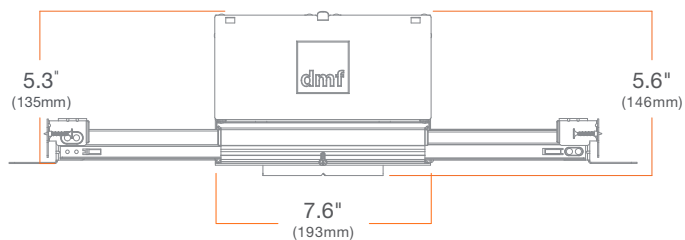

\*\* Can be field cut to a minimum 10 1/2" (267mm) for a range of 10 1/2" (267mm) to 24" (610mm)

## HOUSING

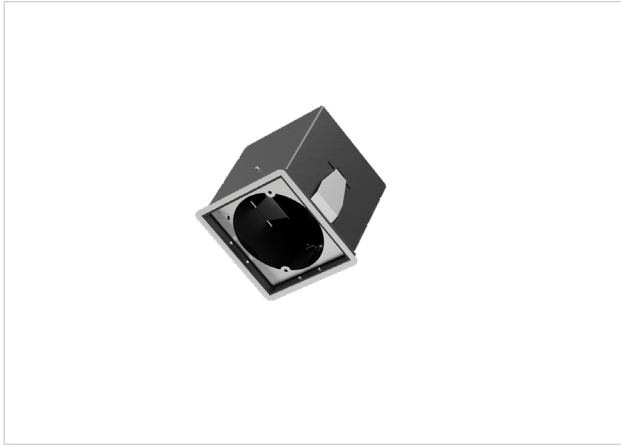

## M Series

Remodel

**M4RMSS (Standard)**

**M4RMSF (Fire Rated)**

### SUMMARY



**JUNCTION BOX:** Equipped with 8 knockouts: four 1/2" trade size knockouts on side, two 3/4" and two 1/2" trade size knockouts on top and four romex knockouts on top. Approved for 8 (four in, four out) #12 AWG 70°C.

**MOUNTING:** Pre-installed mounting spring clips

**CEILING:** 5/8" (16mm) up to 1 1/4" (32mm)

**CUTOUT:** 4" (102mm) square opening

**LISTINGS:** Metallic outlet box certified UL514A, code compliant for use in appropriate fire-rated assemblies for up to 2-hours (Fire Rated only), STC/IIC Sound Rated, ASTM E283 certified Air Tight, IC (Insulation Contact) rated



## TRIMS



## M Series

4" Square Trims

**M4TS**



### SUMMARY

**CONSTRUCTION:** Die-cast aluminum

**INSTALLATION:** Twist & Lock


### Standard

**M4TSSWH**

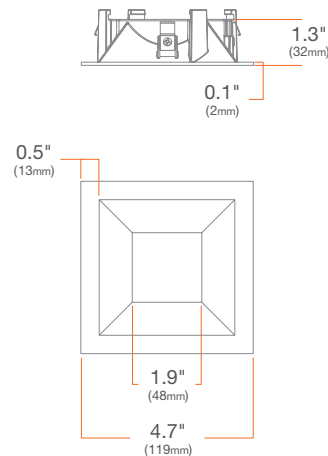


### Standard Flangeless

**M4TSSWHFL**

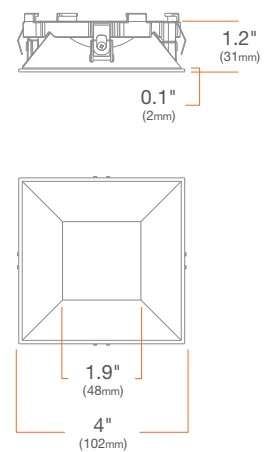



### Round On Square

**M4TSQWH**

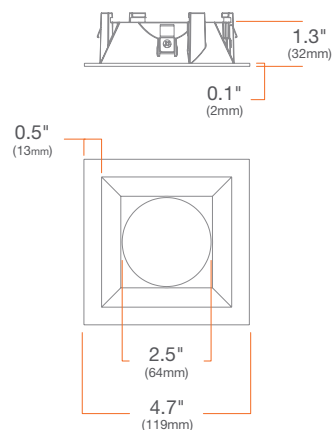


### Round On Square Flangeless

**M4TSQWHFL**

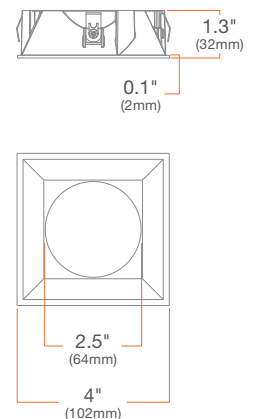


## Wall Wash/Sloped Ceiling

Round: **M4TSLWH**

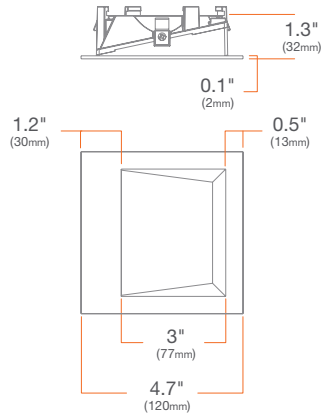


## Wall Wash/Sloped Ceiling Flangeless

**M4TSLWHFL**

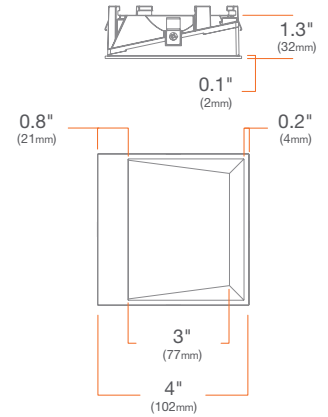


## Pinhole

**M4TSPWH**

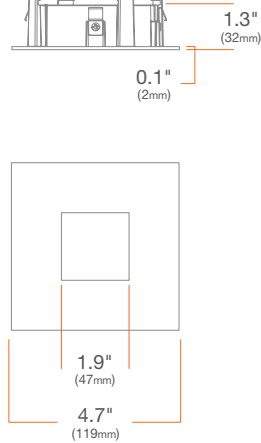

## Pinhole Flangeless


**M4TSPWHFL**

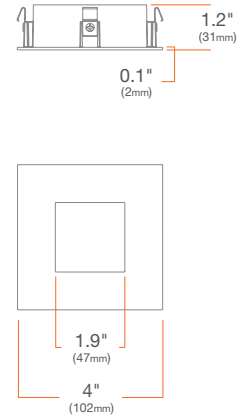

## Decorative Closed

Frosted: **M4TSSWHDCF**


Clear, Frosted Sides: **M4TSSWHDCCF**

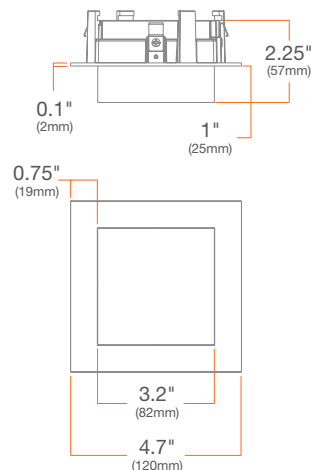

**ACCESSORIES**


**Flangeless Mud Plate**

**M4XSMUD**

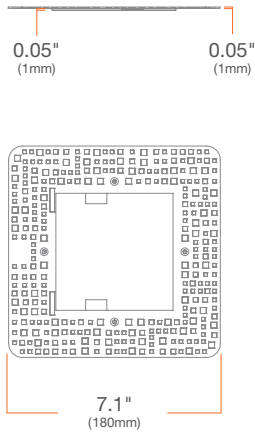

**Router Template**

**M4KSTEMPLATE**

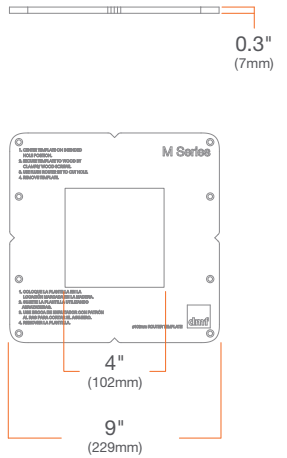




PHOTOMETRY

ART4D 1000 lm, 3000K, Narrow Spot

ART4DM10930NS

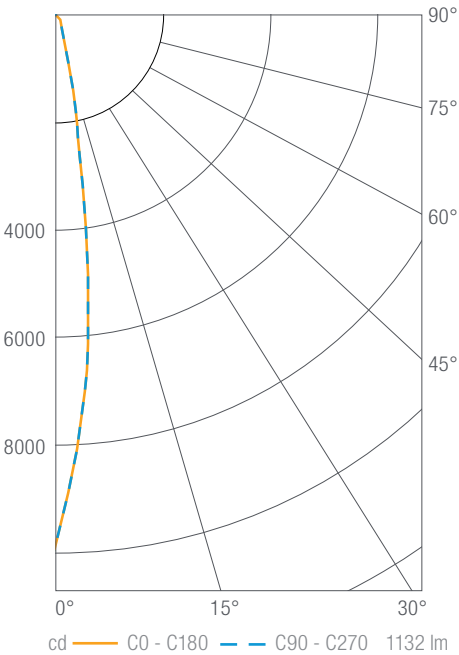

Luminous Intensity

| Gamma | C 0° |
|-------|------|
| 0°    | 9823 |
| 5°    | 6600 |
| 10°   | 2335 |
| 15°   | 734  |
| 20°   | 357  |
| 25°   | 244  |
| 30°   | 195  |
| 35°   | 159  |
| 40°   | 116  |
| 45°   | 85   |
| 50°   | 61   |
| 55°   | 42   |
| 60°   | 28   |
| 65°   | 16   |
| 70°   | 7    |
| 75°   | 4    |
| 80°   | 2    |
| 85°   | 1    |
| 90°   | 0    |

Values in candela

Zonal Lumen Summary

| Zone  | Lumens | Luminaire % |
|-------|--------|-------------|
| 0-30  | 906    | 80          |
| 0-40  | 1004   | 89          |
| 0-60  | 1110   | 98          |
| 0-90  | 1131   | 100         |
| 0-180 | 1132   | 100         |


Illuminance Chart

| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3'                | 1091         | 0.7'     |
| 6'                | 273          | 1.5'     |
| 9'                | 121          | 2.2'     |
| 12'               | 68           | 2.9'     |

Beam Angle: 14°

ART4D 1000 lm, 3000K, Spot

ART4DM10930SP

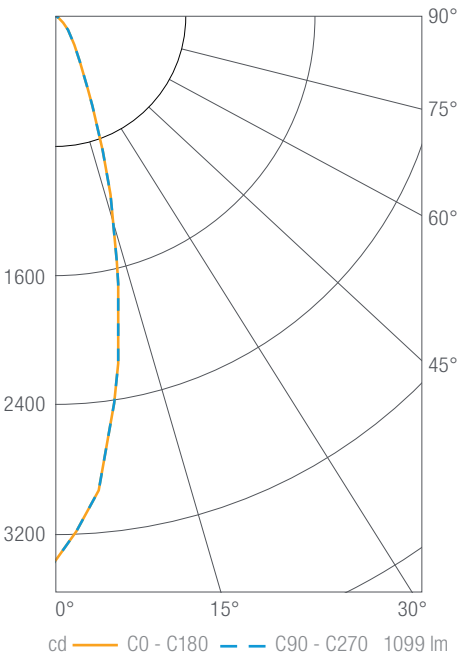

Luminous Intensity

| Gamma | C 0° |
|-------|------|
| 0°    | 3366 |
| 5°    | 2967 |
| 10°   | 2203 |
| 15°   | 1391 |
| 20°   | 775  |
| 25°   | 419  |
| 30°   | 248  |
| 35°   | 167  |
| 40°   | 119  |
| 45°   | 87   |
| 50°   | 62   |
| 55°   | 43   |
| 60°   | 26   |
| 65°   | 15   |
| 70°   | 7    |
| 75°   | 4    |
| 80°   | 2    |
| 85°   | 1    |
| 90°   | 0    |

Values in candela

Zonal Lumen Summary

| Zone  | Lumens | Luminaire % |
|-------|--------|-------------|
| 0-30  | 862    | 78          |
| 0-40  | 971    | 88          |
| 0-60  | 1078   | 98          |
| 0-90  | 1098   | 100         |
| 0-180 | 1099   | 100         |


Illuminance Chart

| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3'                | 374          | 1.4'     |
| 6'                | 93           | 2.8'     |
| 9'                | 42           | 4.2'     |
| 12'               | 23           | 5.6'     |

Beam Angle: 26°

PHOTOMETRY

ART4D 1000 lm, 3000K, Flood  
ART4DM10930FL

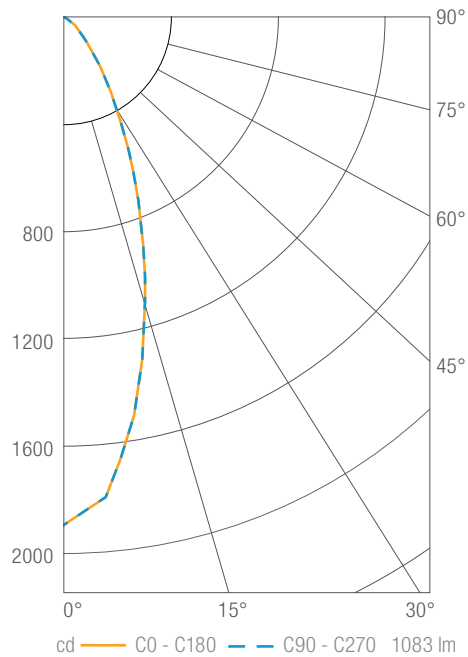

| Luminous Intensity |      |
|--------------------|------|
| Gamma              | C 0° |
| 0°                 | 1890 |
| 5°                 | 1792 |
| 10°                | 1503 |
| 15°                | 1161 |
| 20°                | 849  |
| 25°                | 589  |
| 30°                | 391  |
| 35°                | 256  |
| 40°                | 162  |
| 45°                | 107  |
| 50°                | 74   |
| 55°                | 51   |
| 60°                | 30   |
| 65°                | 18   |
| 70°                | 8    |
| 75°                | 5    |
| 80°                | 3    |
| 85°                | 1    |
| 90°                | 0    |


Values in candela

| Zonal Lumen Summary |        |             |
|---------------------|--------|-------------|
| Zone                | Lumens | Luminaire % |
| 0-30                | 760    | 70          |
| 0-40                | 925    | 85          |
| 0-60                | 1058   | 98          |
| 0-90                | 1081   | 100         |
| 0-180               | 1083   | 100         |

| Illuminance Chart |              |          |
|-------------------|--------------|----------|
| Distance from LED | Foot Candles | Diameter |
| 3'                | 210          | 2.0'     |
| 6'                | 52           | 4.0'     |
| 9'                | 23           | 6.0'     |
| 12'               | 13           | 8.0'     |

Beam Angle: 37°

ART4D 1000 lm, 3000K, Wide Flood  
ART4DM10930WF

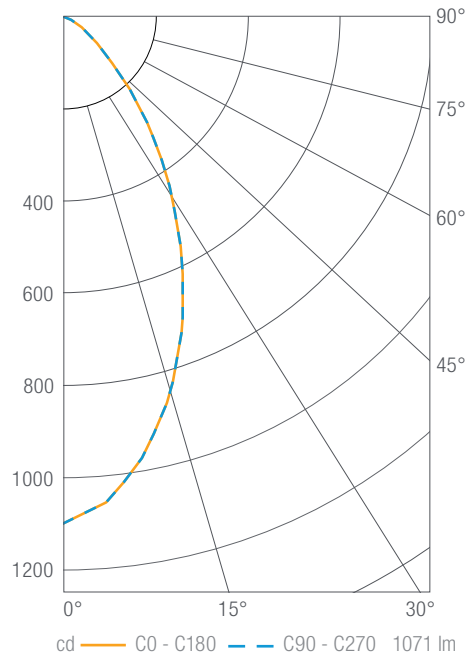

| Luminous Intensity |      |
|--------------------|------|
| Gamma              | C 0° |
| 0°                 | 1100 |
| 5°                 | 1058 |
| 10°                | 973  |
| 15°                | 866  |
| 20°                | 743  |
| 25°                | 609  |
| 30°                | 478  |
| 35°                | 361  |
| 40°                | 252  |
| 45°                | 161  |
| 50°                | 102  |
| 55°                | 68   |
| 60°                | 41   |
| 65°                | 24   |
| 70°                | 11   |
| 75°                | 6    |
| 80°                | 4    |
| 85°                | 2    |
| 90°                | 0    |

Values in candela

| Zonal Lumen Summary |        |             |
|---------------------|--------|-------------|
| Zone                | Lumens | Luminaire % |
| 0-30                | 620    | 58          |
| 0-40                | 845    | 79          |
| 0-60                | 1037   | 97          |
| 0-90                | 1069   | 100         |
| 0-180               | 1071   | 100         |

| Illuminance Chart |              |          |
|-------------------|--------------|----------|
| Distance from LED | Foot Candles | Diameter |
| 3'                | 122          | 3.1'     |
| 6'                | 31           | 6.2'     |
| 9'                | 14           | 9.3'     |
| 12'               | 8            | 12.3'    |


Beam Angle: 55°



PHOTOMETRY

ART4D 1000 lm, 3000K, General Ambient

ART4DM10930GA

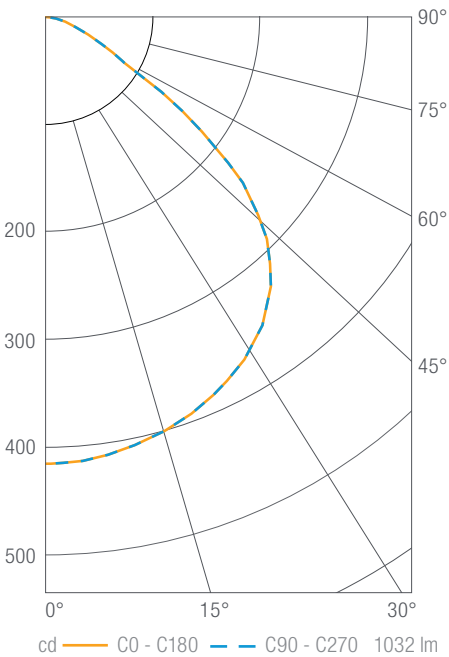

Luminous Intensity

| Gamma | C 0° |
|-------|------|
| 0°    | 416  |
| 5°    | 415  |
| 10°   | 410  |
| 15°   | 403  |
| 20°   | 394  |
| 25°   | 382  |
| 30°   | 369  |
| 35°   | 351  |
| 40°   | 327  |
| 45°   | 291  |
| 50°   | 240  |
| 55°   | 162  |
| 60°   | 84   |
| 65°   | 54   |
| 70°   | 33   |
| 75°   | 21   |
| 80°   | 12   |
| 85°   | 6    |
| 90°   | 1    |

Values in candela

Zonal Lumen Summary

| Zone  | Lumens | Luminaire % |
|-------|--------|-------------|
| 0-30  | 333    | 32          |
| 0-40  | 557    | 54          |
| 0-60  | 942    | 91          |
| 0-90  | 1024   | 99          |
| 0-180 | 1032   | 100         |


Illuminance Chart

| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3'                | 46           | 7.8'     |
| 6'                | 12           | 15.5'    |
| 9'                | 5            | 23.3'    |
| 12'               | 3            | 31.1'    |

Beam Angle: 100°

ART4D 1000 lm, 3000K, Soft Focus

ART4DM10930SF

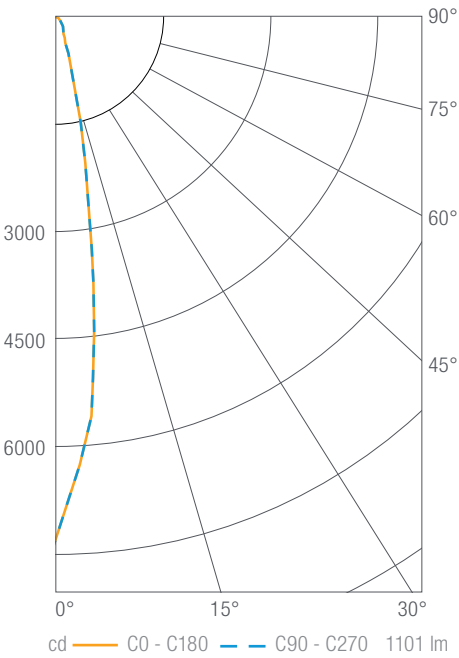

Luminous Intensity

| Gamma | C 0° |
|-------|------|
| 0°    | 7280 |
| 5°    | 5603 |
| 10°   | 2489 |
| 15°   | 875  |
| 20°   | 381  |
| 25°   | 247  |
| 30°   | 194  |
| 35°   | 161  |
| 40°   | 122  |
| 45°   | 90   |
| 50°   | 64   |
| 55°   | 45   |
| 60°   | 28   |
| 65°   | 16   |
| 70°   | 7    |
| 75°   | 4    |
| 80°   | 2    |
| 85°   | 1    |
| 90°   | 0    |

Values in candela

Zonal Lumen Summary

| Zone  | Lumens | Luminaire % |
|-------|--------|-------------|
| 0-30  | 868    | 79          |
| 0-40  | 968    | 88          |
| 0-60  | 1078   | 98          |
| 0-90  | 1100   | 100         |
| 0-180 | 1101   | 100         |

Illuminance Chart

| Distance from LED | Foot Candles | Diameter |
|-------------------|--------------|----------|
| 3'                | 809          | 0.9'     |
| 6'                | 202          | 1.7'     |
| 9'                | 90           | 2.6'     |
| 12'               | 51           | 3.4'     |

Beam Angle: 16°