



Multi-Purpose/Chemical Resistant Hose

Single-layer teflon tubing is hard and easy to break. Our Flexible Fluorine (PVDF) Resin Tubing is an alternative tubing for a teflon tubing.

Flexible Fluorine (PVDF) Resin Tubing Clear

[Model Number: E-PD-(I.D. × O.D.)]**Applications • Fluids****(Materials / Structure)**

- For Industrial Water-based Ink-Jet Printers (For Ink-Supplying Pipes)
- For Transferring Chemicals used in Laboratory Equipment
- For Transferring Chemicals used in Semiconductor-Related Devices and Flat-Panel Display (FPD) Manufacturing Devices
- For Transferring Beverage and Food
- For Transferring Alcohol, Cosmetics, and Chemicals
- For Transferring Chemicals used in Medical Equipment, Endoscope, and so on
- For Transferring Chemicals used in Manufacturing Fuel Cell and Pure Water
- For Transferring Air at Clean Room

(Packing Dimension)**Standard • Packing Information**

Model Number	Inch (Inside Diameter) (*1)	I.D. × O.D. mm	Working Pressure MPa at 20°C at 80°C		Minimum Bend Radius at 20°C mm	Temperature Range °C	Standard Length m	Product Weight kg/roll	Color	Packing Dimension(*2)			
										Packing	Diameter (D) cm	Height (H) cm	Weight/roll kg/roll
E-PD-2×4	5/64	2×4	0 ~ 0.6		15		20	0.24	Clear	Plastic Bag	23.5	5	0.24
							100	1.21		Cardboard Box	38.5	15	1.73
E-PD-4×6	5/32	4×6			25		20	0.41		Plastic Bag	26	5	0.41
							100	2.03		Cardboard Box	38.5	15	2.55
E-PD-6×8	1/4	6×8	0 ~ 0.4	0 ~ 0.2	50	-20 ~ 80	20	0.57	Clear	Plastic Bag	30	5.5	0.57
							100	2.86		Paper Bobbin	38.5	15	3.78
E-PD-6×9	1/4	6×9			35		20	0.89		Plastic Bag	33	5.5	0.89
							100	4.43		Paper Bobbin	38.5	15	5.35
E-PD-8×12	5/16	8×12	0 ~ 0.6		50		20	1.55	Clear	Plastic Bag	35.5	8	1.55
							100	7.74		Paper Bobbin	46	16	8.92

*1: Please note that inch size is approximate, which is not equal to milliunit.

*2: "Diameter (D)" × "Height (H)" means "External Dimensions of Cardboard Box (D)" × "Height (H)."

Characteristics and Functions

Non-PVC

Non-Adhesiveness

Gas Barrier

Chemical Resistance

Low Elution

Food-Sanitation

Flexibility

Oil-Proof


Alcohol Resistant

Cold Resistance

- Chemical Resistance**...Since the inner layer is made of PVDF fluorine resin, E-PD is resistant to most of the chemical substances. (Please note that E-PD does not stand proof against organic solvents such as Amine and Ketones, so we recommend you to use E-SJ.) For more information, please refer to chemical resistance data.
- Flexibility**...Due to the laminated structure, compared with the conventional single-layer fluorine tubing, E-PD is superior in flexibility. This improves your work efficiency.
- Gas Barrier**...The inner layer of fluorine (PVDF) has a higher level of gas barrier property, which is suitable for the fluid with high volatility.
- Hard to Break**...Unlike the conventional single-layer fluorine tubing, E-PD is hard to break. (Even if it breaks, you can restore its shape to some extent.)
- Non-Adhesiveness**...Since fluorine resin is superior in water-proof and non-adhesiveness, you can wash out the fluids very easily.
- Plasticizer-Free**...E-PD does not contain plasticizer (an elution material) at all. E-PD is an oil-free tubing.
- Non-PVC**...E-PD is made of a non-PVC material.
- Low Elution and Low Odor**...Since this tubing contains very low levels of elution and odor, it is recommended for use in transfers of food, beverage, and cosmetics.
- High Purity**...Fluorine resin does not contain any additives such as plasticizer, so E-PD is suitable for transferring high purity chemical fluids.
- Easy to Cut**...Since we print the cut mark on the tubing every meter, it is easy to cut the length you would like to.
- Transparency**...E-PD enables you to check the fluid very easily.
- Green Procurement**...E-PD is compliant with RoHS2 requirements.
- Original Fittings**...By using our original fittings, you can avoid accidents which are caused by incorrect choices of hose and fittings.
- Food Sanitation Law Certified**...E-PD conforms to the Food Sanitation Standard No.370 (The Ministry of Health and Welfare for Food Sanitation, No.370, 1959). (Conformity to N-Heptane).

Technical Information

E-PD: Relationship between Working Temperature and Maximum Working Pressure

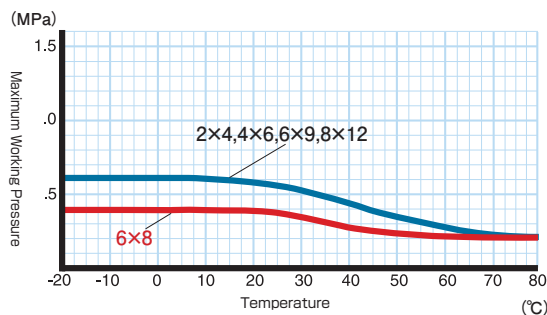


※ The above graph is the value when our original E-FTS fittings are used.

Non-Adhesiveness Comparison Data

Non-adhesiveness and smoothness, which are peculiar to fluorine resin, make it easier to wash out the fluid. You can check the data about critical surface tension and contact angle against water.

Resins	Critical Surface Tension (dyne/cm)	Contact Angle for Water (°)
Ethylene-Tetrafluoroethylene (ETFE)	22	96
Polyvinylidene Fluoride (PVDF)	25	82
High Density Polyethylene	31	73
Hard Vinyl Chloride	39	68
PET	43	
Nylon	46	54



Comparative Data on Gas Barrier Property

Type of Gas	Transmission Coefficient (cc/mm/sec · cm ² · cmHg)	
	Polyvinylidene Fluoride	Polyethylene
Oxygen	24×10^{-12}	$5,900 \times 10^{-12}$
Nitrogen	5.5×10^{-12}	330×10^{-12}
Carbonic Acid Gas	9×10^{-12}	$28,000 \times 10^{-12}$

(Flexibility Comparative Data)

(Test Temperature:20°C)


- This is one indication of flexibility. Flexibility varies depending on hose (tubing).
- The larger the amount of deflection is, the more flexible the hose (tubing) is.
- ※ The lower the minimum bend radius value is, the harder the hose (tubing) is.

Test Sample	Minimum Bend Radius (mm)	Amount of Deflection (mm)
① E-PD-4 × 6	23 (Catalog Value : 25)	28
② E-SJ-4 × 6	23 (Catalog Value : 25)	31
③ PTFE Tubing (4 × 6)	20	7
④ PFA Tubing (4 × 6)	23	6

Test Method for Amount of Deflection (Flexibility)


Add a 50 gram weight to the end of the tubing for one minute. Then, measure the amount of deflection. (The test piece goes through the annealing step in advance to make it straight.)

※③ PTFE Tubing and ④ PFA Tubing are not our products.



HAKKO Original Fittings

Model Number	Body						Nut		Weight Gram/Piece	Applicable Hose
	A	B	C	D	E	Thread	HEX	F		
E-FTS-2×4-R1/8	24.5	10	4	10.5	1.7	R1/8	10	10.5	10	E-PD-2×4
E-FTS-4×6-R1/4	31	12	5	14	3.5	R1/4	14	14	29	E-PD-4×6
E-FTS-6×8-R1/4	33	12	5	16	5.5	R1/4	17	16	32	E-PD-6×8
E-FTS-6×9-R1/4	35.5	12	5	18.5	5.5	R1/4	17	18.5	41	E-PD-6×9
E-FTS-8×12-R3/8	41	13	7	21	7	R3/8	19	21	61	E-PD-8×12

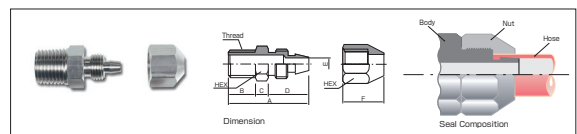

Material: 316 L Steel Use Stainless (Body) and 304 Steel Use Stainless (Nut)



- *Due to the laminated structure tubing, please use the joints to seal an inner surface of the hose.
- *Please do not use the joints to seal an outer surface of the hose. This may result in the bursting or coming off from the hose.
- *When you use our products, please refer to "Precautions for Use" available on our webpage and product catalog.
- *In terms of chemical resistance, please refer to "Chemical Resistance Data" available on our webpage and product catalog.
- *Although the inner layer is made of fluorine, please make sure whether or not E-PD is usable for high purity fluids before you use.
- *Although the inner layer is resistance to fluids, but depending on working environments, the fluids would be permeated through the inner layer, resulting in the danger of swelling and degradation of the middle or outer layer.

Contact us if you have any inquiries about HAKKO products.

NISHIYAMA Corporation of America

111 GREAT NECK ROAD, SUITE 510
GREAT NECK, N.Y. 11021-5408
TEL (1) 516-466-7570
FAX (1) 516-466-7572
EMAIL sales@nishiyama-usa.com

URL: <https://nishiyama-usa.com>

HAKKO CORPORATION

HAKKO CORPORATION

HEAD OFFICE / SALES DEPARTMENT

Unity Forum 5F, 42-18, 1-Chome, Itabashi, Itabashi-Ku, Tokyo 173-0004, Japan
TEL (81) 3-3963-5381 FAX (81) 3-3961-4400

OSAKA OFFICE

Akatsuki Building 7F, 13-45, Toyotsu-cho, Suita-shi, Osaka 564-0051, Japan
TEL (81) 6-6310-6880

SAITAMA FACTORY · AKITA FACTORY

URL: <https://eightron.co.jp/English>