



Client: _____ Project Name: _____
 MODA Contact: _____ E-Mail: _____
 SKU: _____ Type: _____ PO#: _____ Quantity: _____
 Notes: _____



MINIATURE LINE VOLTAGE COVE FIXTURE

MODA MINI COVE INTERIOR is an award winning, patented, miniature line voltage cove lighting system. This powerful and efficient fixture is available in two outputs, delivering up to 1400 lumens per foot in a small 1 3/16in (30mm) tall profile. MINI COVE uses the latest Advanced MODA Design; MODA LEDs, custom award winning MODA phosphors, and superior MODA Micro Drivers. Fixtures are cool to the touch, extending the LED's useful life. This is all achieved with forward thinking fixture design coupled with intelligent driver technology and the most advanced LEDs in the industry, all made by MODA.

The MODA Dimming Chipset, programmed by our Software Division, ensures MINI COVE delivers smooth, quiet, flicker-free and synchronized dimming down to 0%. Choose either ELV or 0-10V dimmable fixtures. Additional adapters, converters or control modules are not required. Link any combination of 6in, 1ft, or 4ft units and every fixture will dim together smoothly, synchronized from 100% to 0%. With no minimum run lengths, one 6in fixture will dim seamlessly to 0%. Achieve long single runs of up to 240 feet. A MODA Micro Driver, specifically designed for MINI COVE, accepts 100-277V AC 50/60 Hz.

A revolutionary new standard for MODA offers a High Color Rendering Index of 95-98, and is R1-R15 tested to TM30-15 with values in excess of 95. We make LEDs in only one bin. Every fixture has the same CCT, characteristics and values, providing beautiful consistent cove illumination. Efficacy is not compromised with many fixtures delivering 100 lm/W. Choose from our standard white light temperatures of 1800K, 2200K, 2700K, 3000K, 3500K, 4000K and 6500K. Every color looks clean, crisp and sharp. Even 1800K renders colors precisely and 6500K offers a clarity that prevents it from appearing blue. The High CRI, excellent R1-R15 values and excellent TM30 results for all MODA colors provides the highest quality cove illumination no matter the color temperature chosen.

A specialized curved polymer optical lens combined with a cleverly designed Light Chamber delivers a light bending, smooth 200 degree beam pattern perfect for cove installations with no color over angle, no striations, and without dark spots. The fixture incorporates an integral, patented, toolless, self-locking bracket which slides into any position and adjusts to 170 degrees. Built-in male & female connectors with thumb latch connections offer fast and easy installation. Lightweight aluminum construction is durable with excellent thermal characteristics. Quality American made electronic components. Available in a tiny 6in size (15cm) for tight turning coves and to finish a small space at the end of a run. 1ft and 4ft lengths provide fast installation, achieving long runs in rapid time. ELV fixtures may be controlled by 0-10V devices using our MODA BRIDGE 1. The breadth of the MINI COVE family makes these fixtures a favorite for designers, architects, engineers, and specifiers everywhere.

Tested by Intertek to UL1598 for use in USA & Canada. CE Approved. CCC Approved. WEE. RoHS Compliant. TM-30-15 Tested. US Patent Nos. D787,112 and D783,890. Title 24, JA8-2019.

Product Innovation Award (PIA) Winner 2016 for Best Luminaire. The LEDs used in this product won a Product Innovation Award (PIA) Winner 2018 for Components. LFI Innovation Award 2017 Finalist for Dynamic Color, Theatrical, Cove, Strips and Tape. Lux Award Commended for Interior Product of the Year 2016. Darc Awards Finalist for Best Architectural Lighting Product - Interior Luminaires 2016. International Design Excellence Award for Innovative Product Design Finalist 2016.

Designed & Developed by MODA LIGHT in Las Vegas, NV, USA.

PAGE

3	FEATURES	26	ACCESSORIES: CABLES
4	6 INCH	27	FIXTURES & ACCESSORIES
5	6 INCH POLAR CANDELA	28	FIXTURES & ACCESSORIES
6	1 FOOT		
7	1 FOOT POLAR CANDELA		
8	1 FOOT ILLUMINANCE AT DISTANCE		
9	4 FOOT		
10	4 FOOT POLAR CANDELA		
11	4 FOOT ILLUMINANCE AT DISTANCE		
12	TM30		
13	TM30		
14	TM30/R VALUES/CHROMATICITY		
15	ELV WIRING		
16	0-10V TO ELV		
17	ACCESSORIES: MOUNTING TRACK		
18	ACCESSORIES: ASYMMETRIC LOUVER		
19	PHOTOMETRICS & ILLUMINANCE AT DISTANCE - ASYMMETRIC LOUVER		
20	ACCESSORIES: SYMMETRIC LOUVER		
21	PHOTOMETRICS & ILLUMINANCE AT DISTANCE - SYMMETRIC LOUVER		
22	ACCESSORIES: HONEYCOMB LOUVER		
23	PHOTOMETRICS & ILLUMINANCE AT DISTANCE - HONEYCOMB LOUVER		
24	ACCESSORIES: BLADE LOUVER		
25	PHOTOMETRICS & ILLUMINANCE AT DISTANCE - BLADE LOUVER		

PHYSICAL

Dimensions	L: 6 5/16in (160mm) L: 12in (304mm) L: 48in (1219mm)	W: 1 13/16in (46mm) H: 1 3/16in (30mm)
Weights	6in: 0.21 lbs (0.10 kg) / 1ft: 0.38 lbs (0.17kg) 4ft: 1.22 lbs (0.55 kg)	
Applications	Cove, Accent & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	MODA Aluminum Heat Sink	
Beam Angle	200°	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

OUTPUT

CCT	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
SDCM	2 Step MacAdam Ellipse
Color Bin Tolerance	MODA Zero Bin
CRI	95 - 98
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

DIMMING

Outputs Available	
6IN	SO Only
1FT	SO, HO
4FT	SO, HO

MODA TECHNOLOGY

modaSOFTWARE™

modaHARDWARE™

modaDIM™

modaLED™

modaMICRO DRIVER™

modaPHOSPHOR™

modaZERO BIN™

modaTHERMAL MANAGEMENT™

modaHIGH CRI™

modaAIRFLOW™

modaCOLOR RENDITION™

modaLOCK™

modaKWIK CONNECT™


STANDARDS & CERTIFICATIONS



Certification Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant. Title 24, JAB-2019

*CCT's 2200K - 4000K

Class	1
Warranty	5 Year Limited Warranty

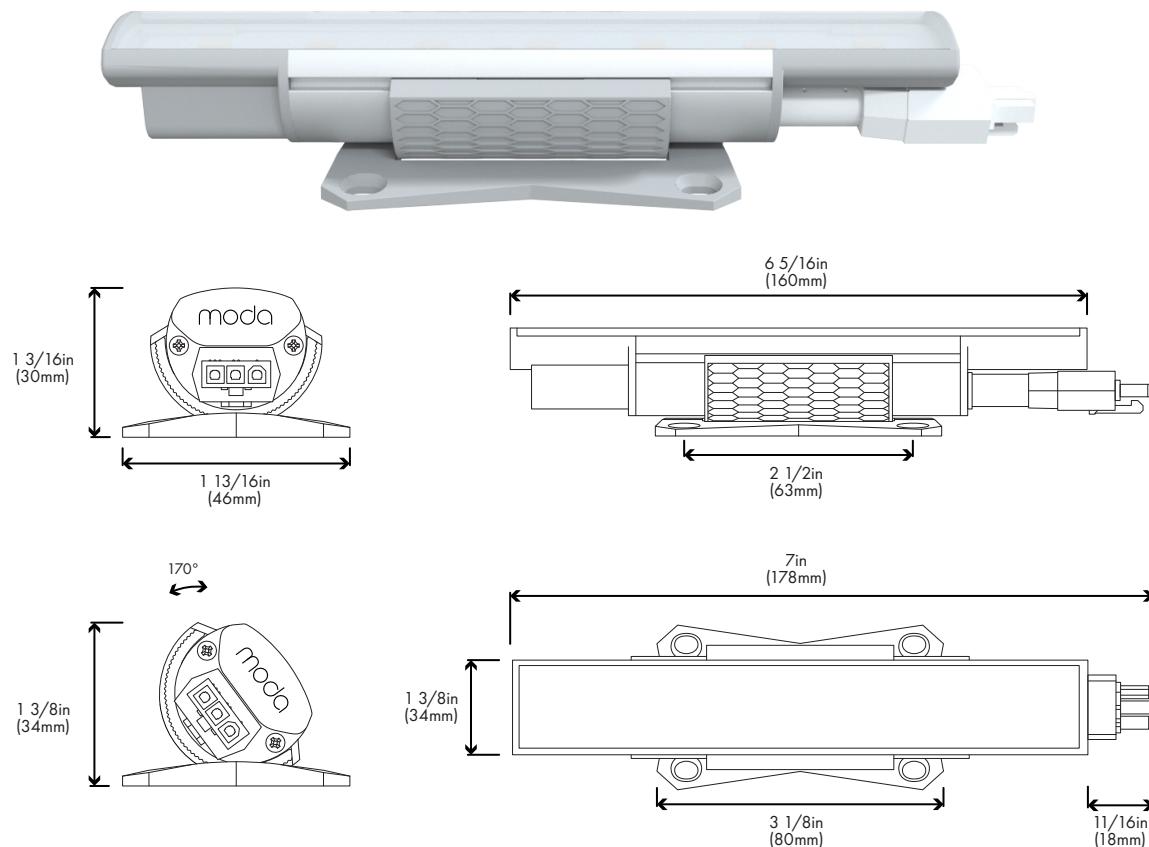

ELV

Standard Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)	SO Power Consumption	SO Max Continuous Run
1800K	147.00	95	52.50	38.68	35	120V	2.8W
2200K	164.00	97	58.57	43.16	39.05	240V	3.8W
2700K	202.00	98	72.14	53.16	48.10	277V	4.2W
3000K	210.00	97	75.00	55.26	50.00		
3500K	214.00	98	76.43	56.32	50.95		
4000K	223.00	96	79.64	58.68	53.10		
6500K	350.00	98	125.00	92.11	83.33		


NOTES

For 0-10V dimming, use MODA Bridge 1 US accessory.


Please refer to page 16 (0-10V TO ELV)

POLAR CANDELA DISTRIBUTION


SO 1800K

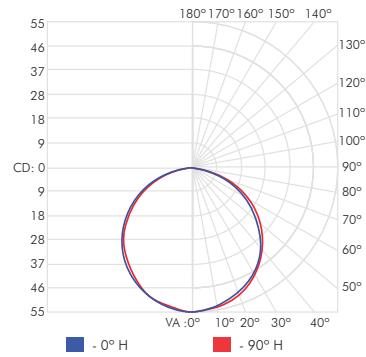


SO 2200K

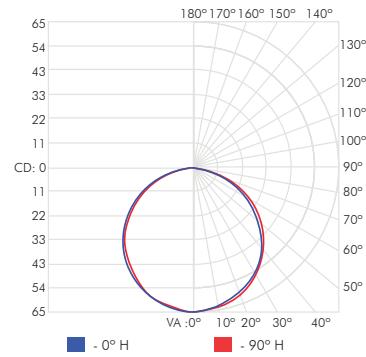


SO 2700K

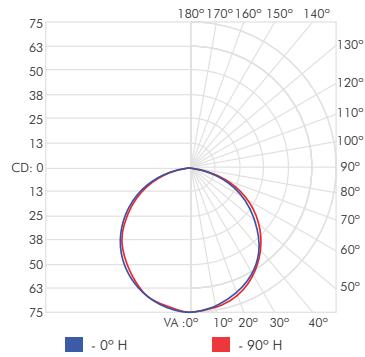


SO 3000K

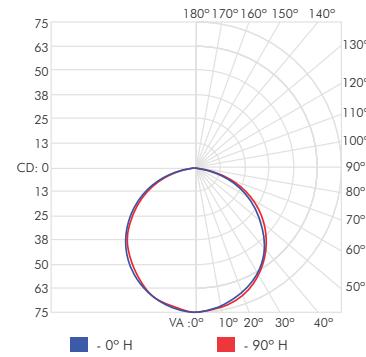


SO 3500K

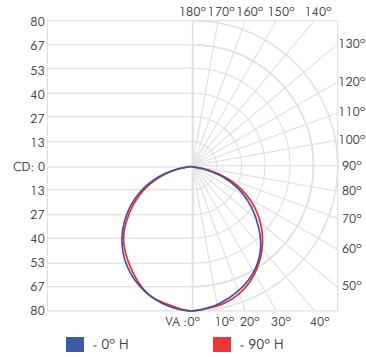

SO 4000K

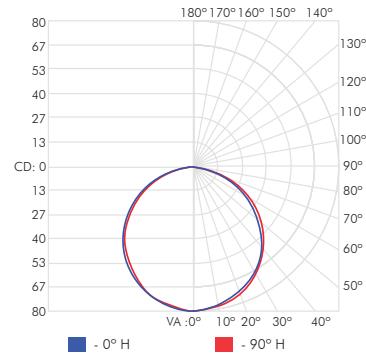


SO 6500K

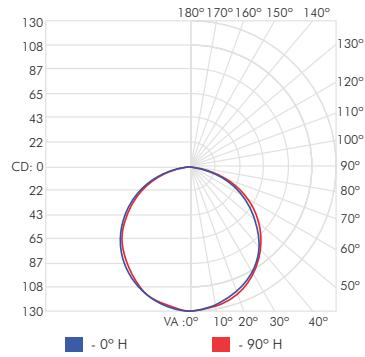


ILLUMINANCE AT A DISTANCE


SO 1800K

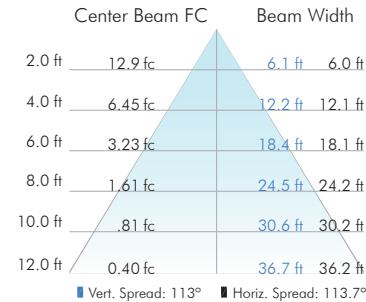


SO 2200K

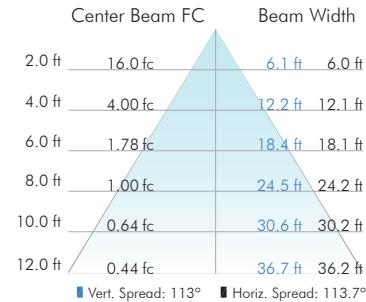


SO 2700K

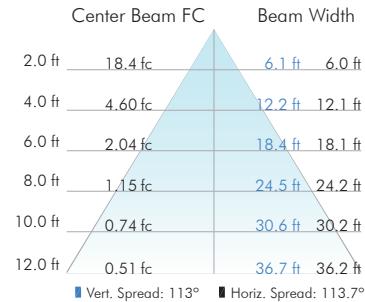


SO 3000K

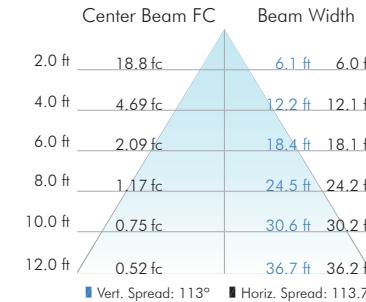


SO 3500K

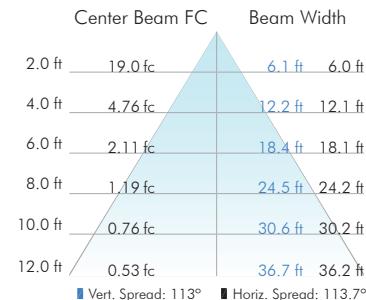


SO 4000K

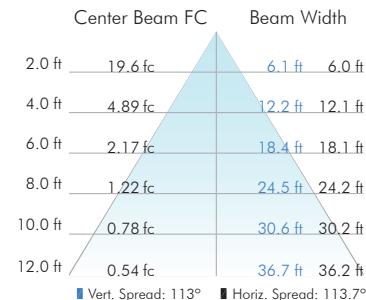

SO 6500K

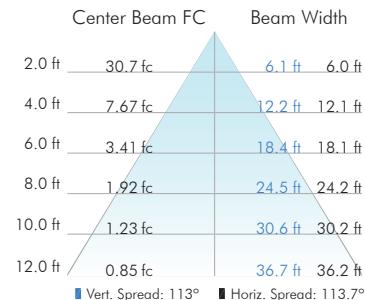

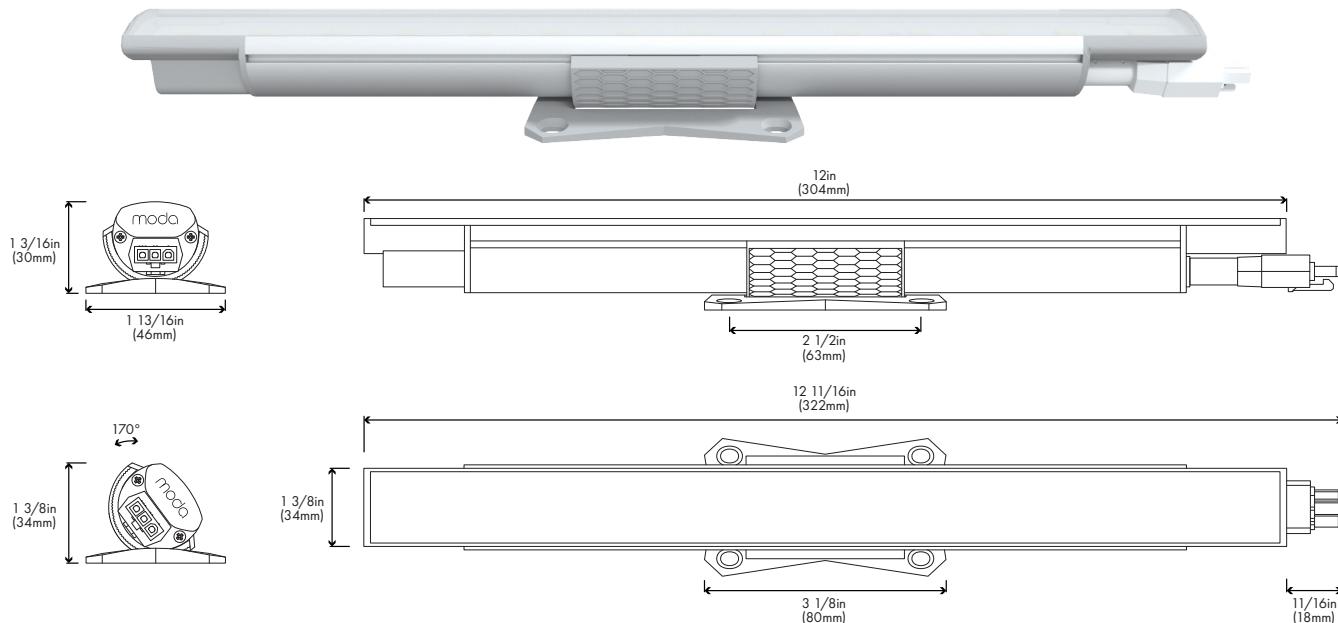

ELV

Standard Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
1800K	294.00	95	58.80	49.83	45.23
2200K	337.00	96	67.40	57.12	51.85
2700K	448.00	98	89.60	75.93	68.92
3000K	480.00	97	96.00	81.36	73.85
3500K	489.00	98	97.80	82.88	75.23
4000K	502.00	96	100.40	85.08	77.23
6500K	728.00	98	145.60	123.39	112.00

High Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
1800K	588.00	95	60.62	58.22	57.09
2200K	674.00	96	69.48	66.73	65.44
2700K	895.00	98	92.27	88.61	86.89
3000K	961.00	97	99.07	95.15	93.30
3500K	978.00	98	100.82	96.83	94.95
4000K	1004.00	96	103.51	99.41	97.48
6500K	1400.00	98	144.33	138.61	135.92

SO Power Consumption

120V	5W
240V	5.9W
277V	6.5W

SO Max Continuous Run

120V AC	120 ft
240V AC	240 ft
277V AC	240 ft

HO Power Consumption

120V	9.7W
240V	10.1W
277V	10.3W

HO Max Continuous Run


120V AC	50 ft
240V AC	100 ft
277V AC	100 ft

NOTES


For 0-10V dimming, use MODA Bridge 1 US accessory.
Please refer to page 16 (0-10V TO ELV)

STANDARD OUTPUT


SO 1800K

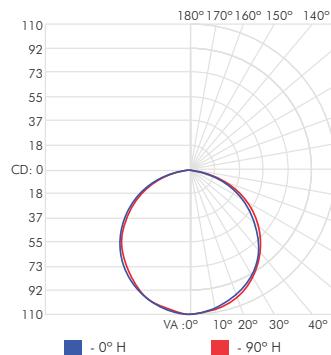


SO 2200K

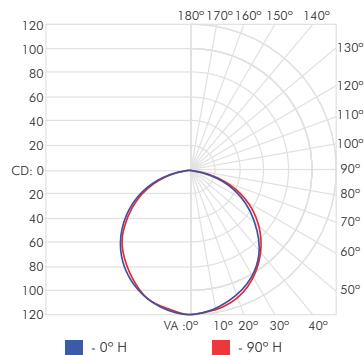


SO 2700K

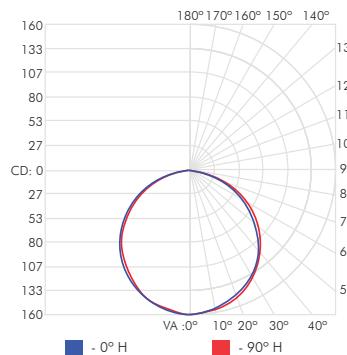


SO 3000K

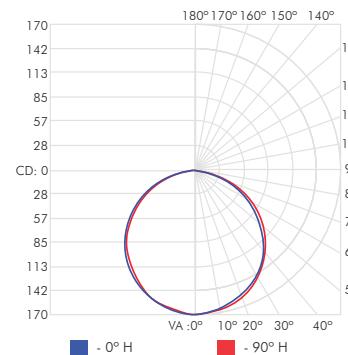


SO 3500K

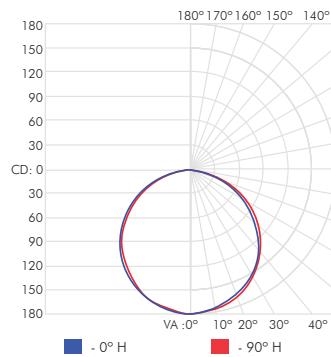

SO 4000K

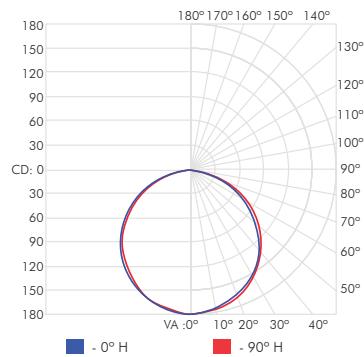


SO 6500K

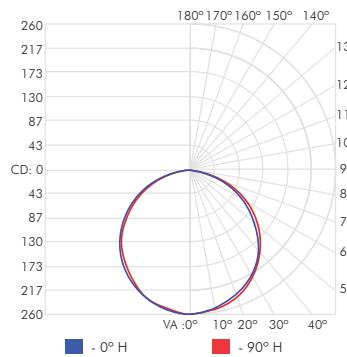


HIGH OUTPUT


HO 1800K

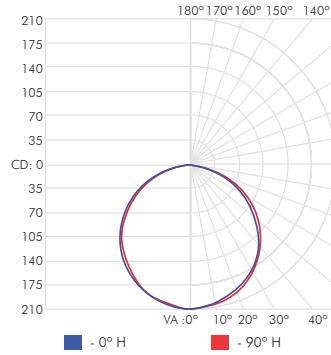


HO 2200K

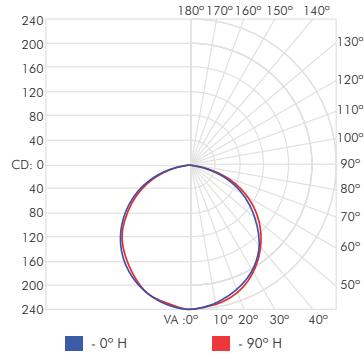


HO 2700K

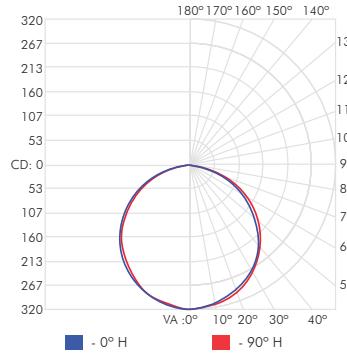


HO 3000K

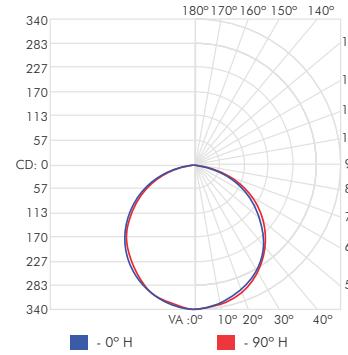


HO 3500K

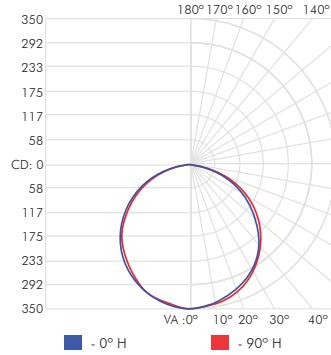

HO 4000K

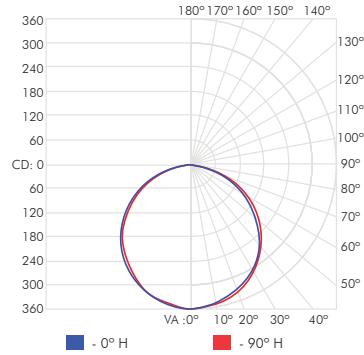


HO 6500K

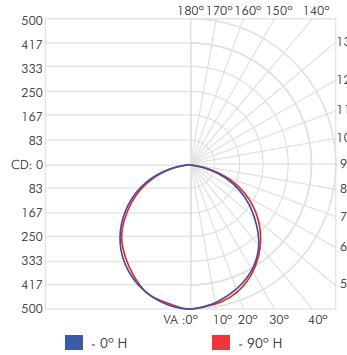


Due to continuous improvements and innovations, specifications may change without notice.
Please refer to our website for current technical data. These figures are provided as a guideline
only and may vary with differing power supplies and installations. All rights reserved. E&OE.

STANDARD OUTPUT


SO 1800K

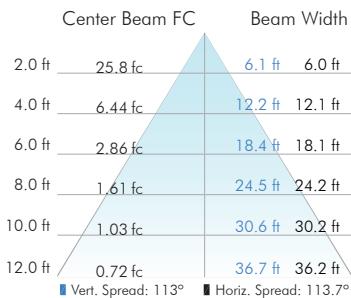


SO 2200K

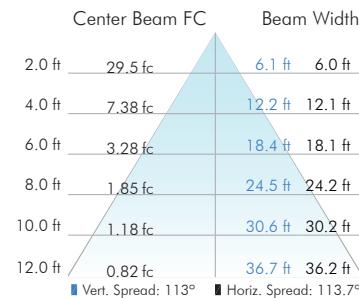


SO 2700K

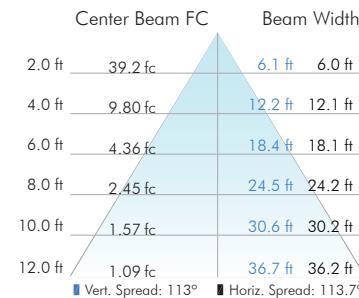


SO 3000K

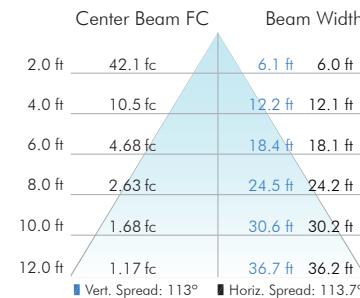


SO 3500K

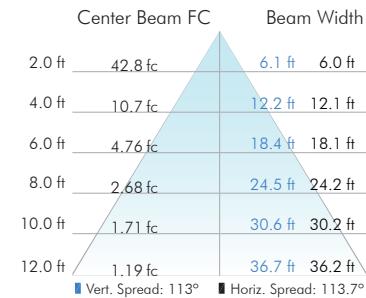

SO 4000K

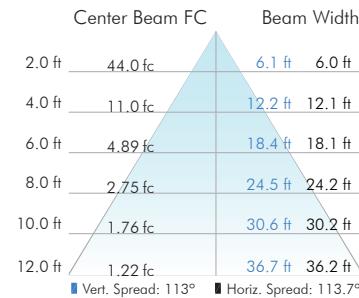


SO 6500K

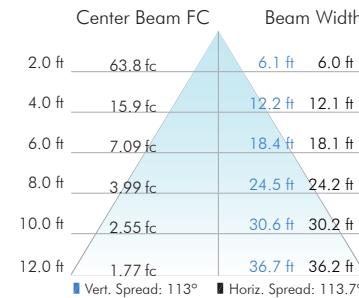


HIGH OUTPUT


HO 1800K

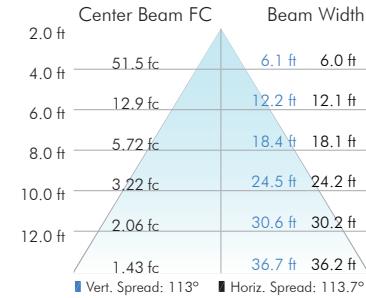


HO 2200K

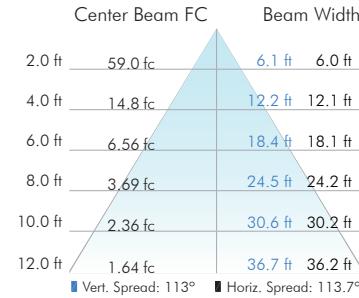


HO 2700K

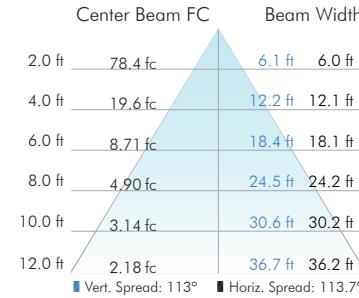


HO 3000K

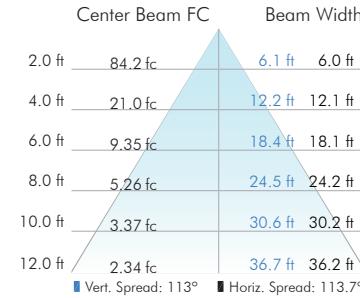


HO 3500K

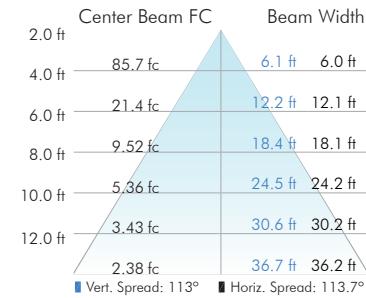


HO 4000K

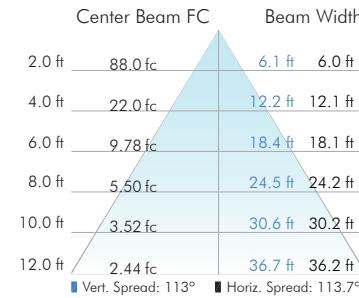

HO 6500K

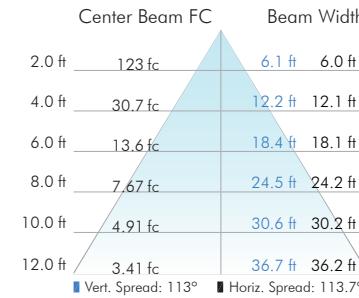

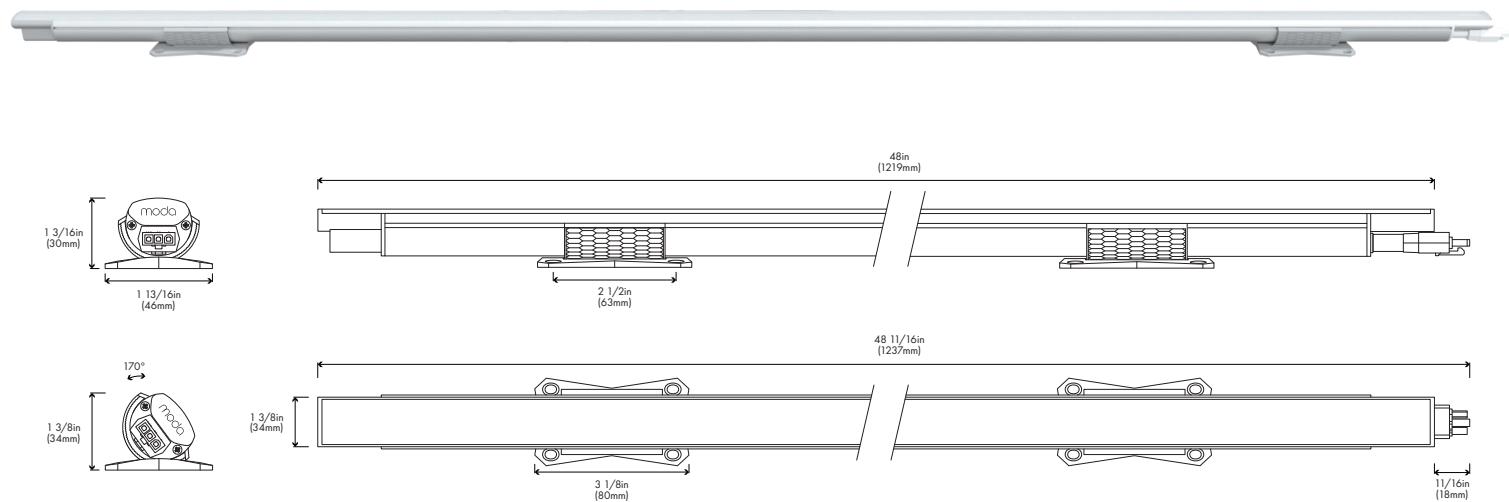

ELV

Standard Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)	High Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
1800K	1176	95	64.26	62.55	61.25	1800K	2352	95	65.33	63.40	61.57
2200K	1357	96	74.15	72.18	70.68	2200K	2715	96	75.42	73.18	71.07
2700K	1779	98	97.21	94.63	92.66	2700K	3559	98	98.86	95.93	93.17
3000K	1818	97	99.34	96.70	94.69	3000K	3637	97	101.03	98.03	95.21
3500K	1891	98	103.33	100.59	98.49	3500K	3783	98	105.08	101.97	99.03
4000K	1955	96	106.83	103.99	101.82	4000K	3916	96	108.78	105.55	102.51
6500K	2801	98	153.06	148.99	145.89	6500K	5601	98	155.58	150.97	146.62

SO Power Consumption

120V	18.3W
240V	18.8W
277V	19.2W

SO Max Continuous Run

120V AC	120 ft
240V AC	240 ft
277V AC	240 ft

HO Power Consumption

120V	36W
240V	37.1W
277V	38.2W

HO Max Continuous Run

120V AC	50 ft
240V AC	100 ft
277V AC	100 ft


NOTES

For 0-10V dimming, use MODA Bridge 1 US accessory.


Please refer to page 16 (0-10V TO ELV)

STANDARD OUTPUT


SO 1800K

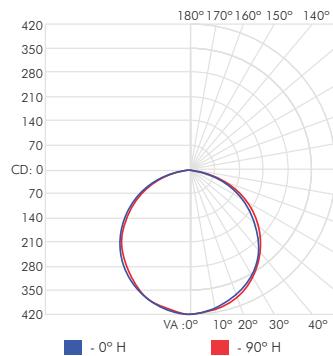


SO 2200K

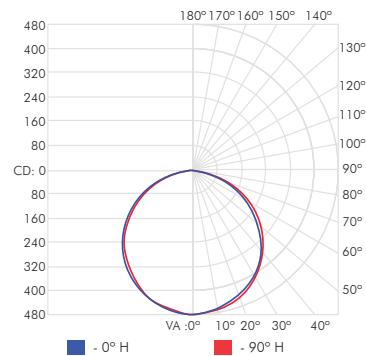


SO 2700K

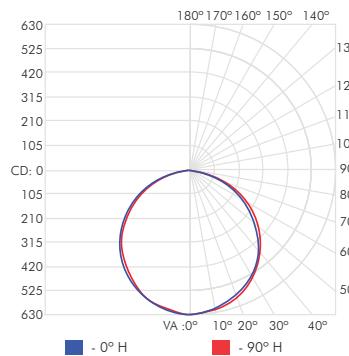


SO 3000K

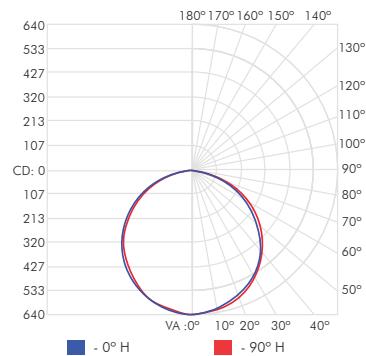


SO 3500K

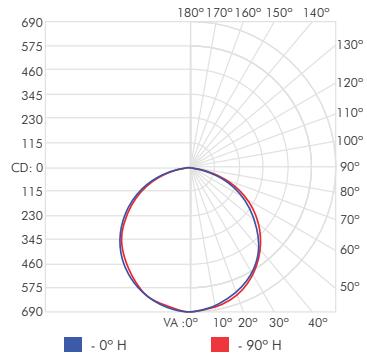

SO 4000K

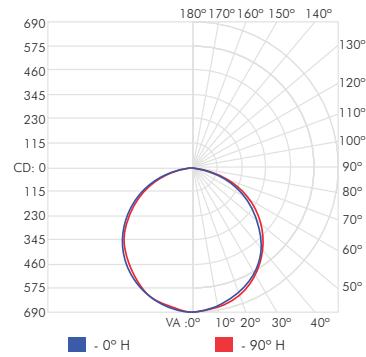


SO 6500K

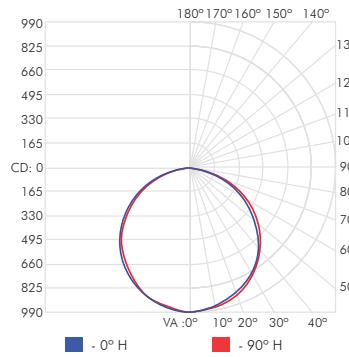


HIGH OUTPUT


HO 1800K

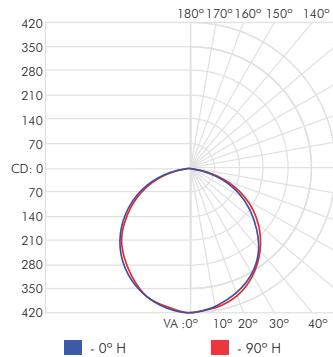


HO 2200K

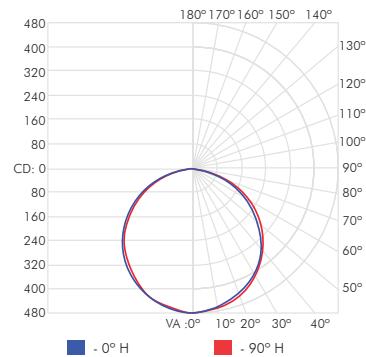


HO 2700K

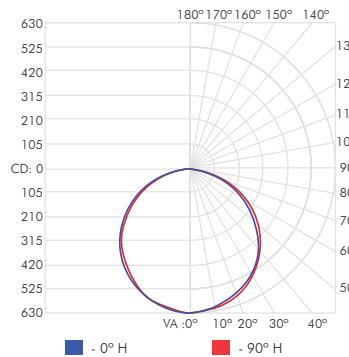


HO 3000K

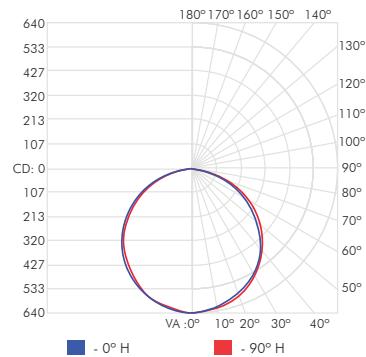


HO 3500K

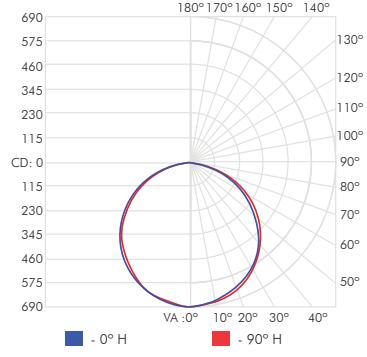

HO 4000K

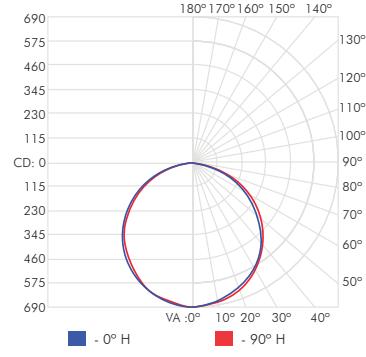


HO 6500K

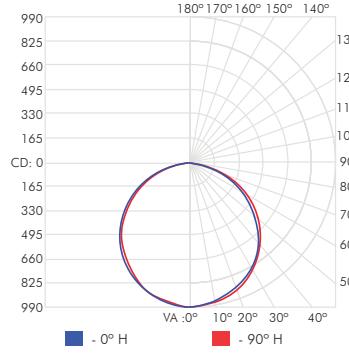


Due to continuous improvements and innovations, specifications may change without notice.
Please refer to our website for current technical data. These figures are provided as a guideline
only and may vary with differing power supplies and installations. All rights reserved. E&OE.

STANDARD OUTPUT


SO 1800K

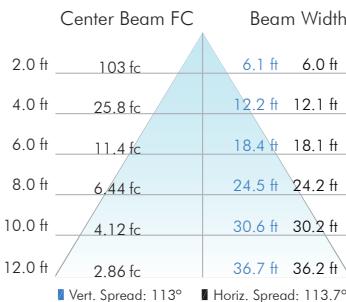


SO 2200K

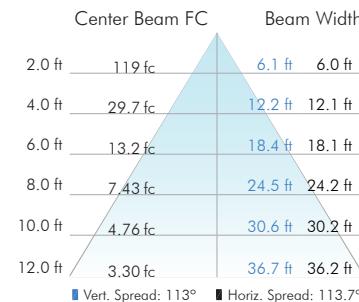


SO 2700K

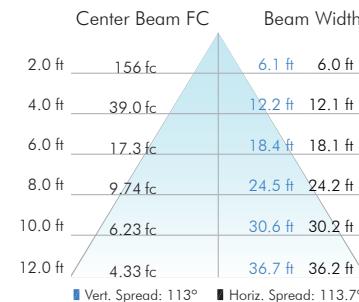


SO 3000K

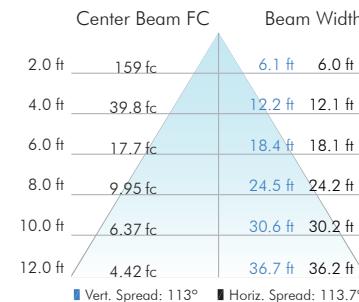


SO 3500K

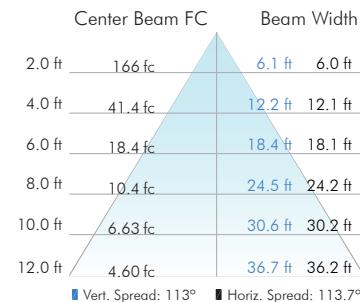

SO 4000K

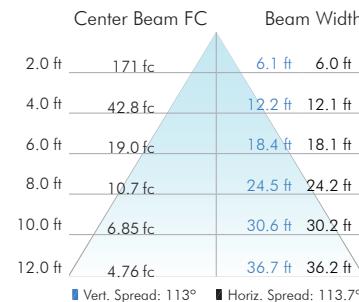


SO 6500K

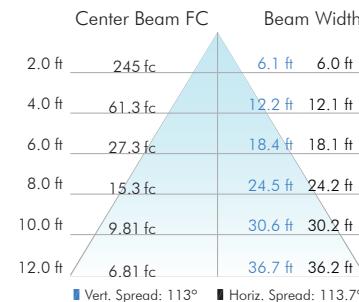


HIGH OUTPUT


HO 1800K

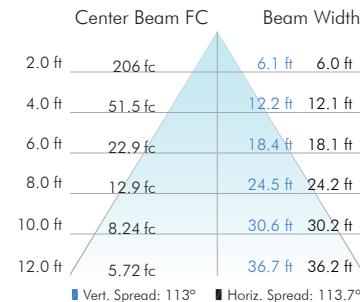


HO 2200K

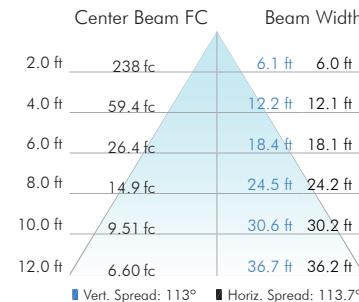


HO 2700K

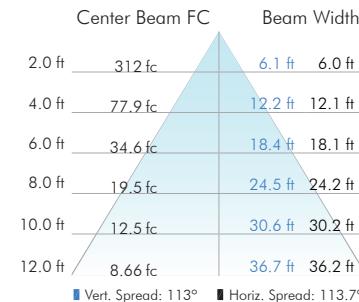


HO 3000K

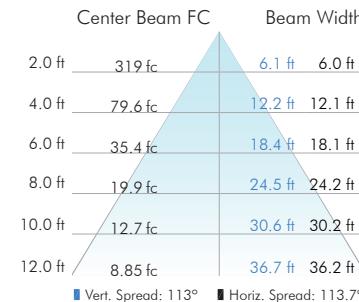


HO 3500K

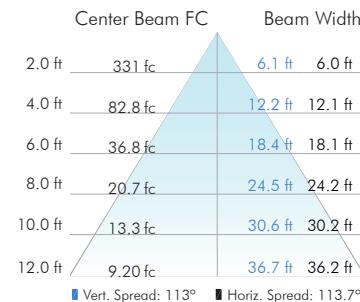


HO 4000K

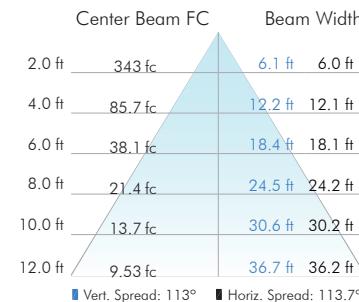


HO 6500K

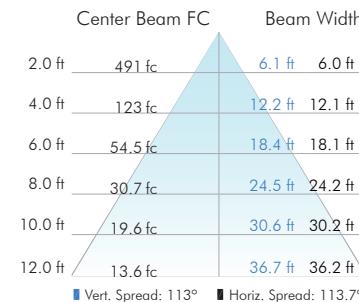


1800K TM30

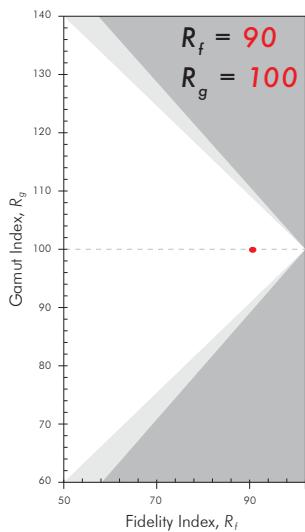


Color Evaluation Sample

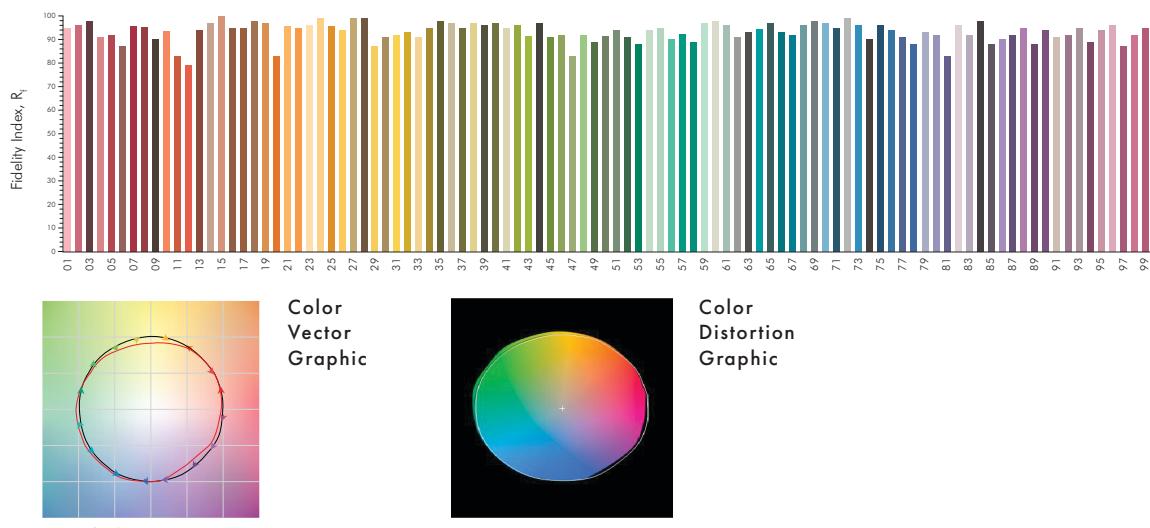


2200K TM30

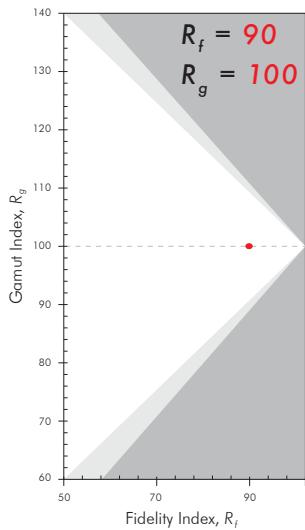


Color Evaluation Sample

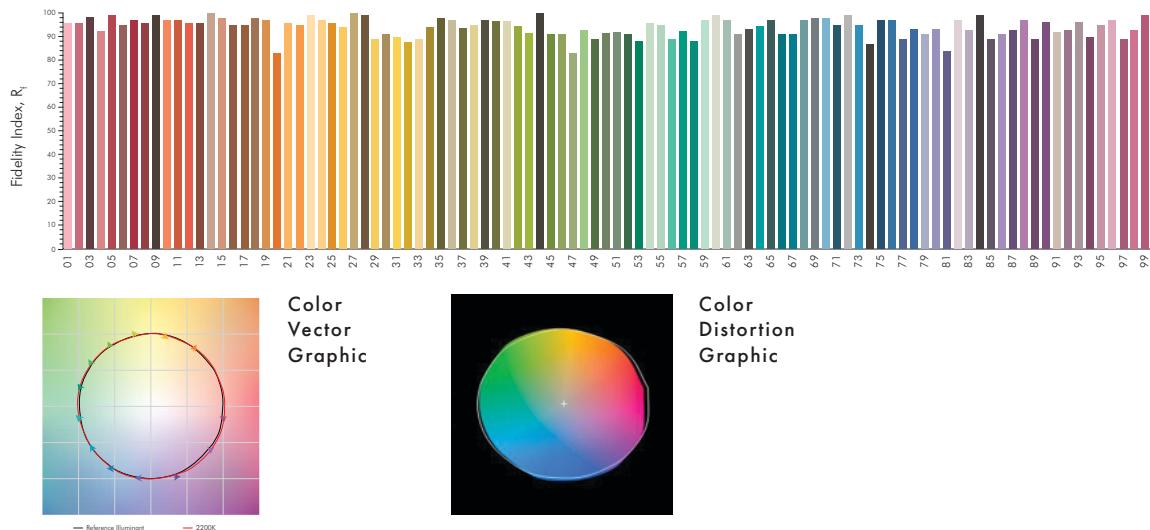

2700K TM30

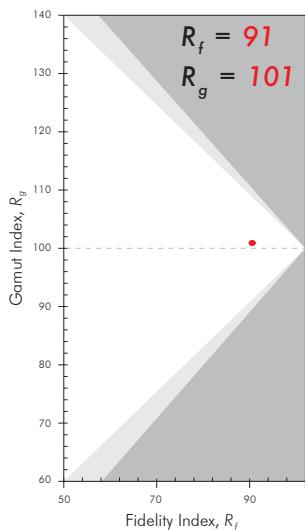


Color Evaluation Sample

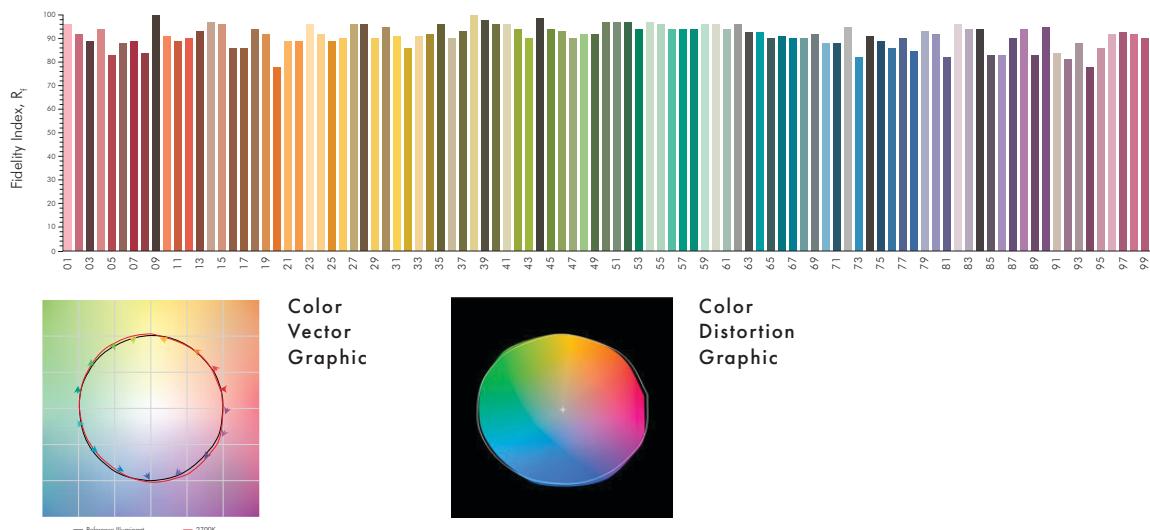


Due to continuous improvements and innovations, specifications may change without notice.
Please refer to our website for current technical data. These figures are provided as a guideline
only and may vary with differing power supplies and installations. All rights reserved. E&OE.


3000K TM30

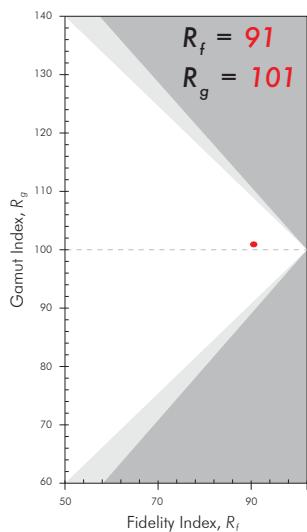


Color Evaluation Sample

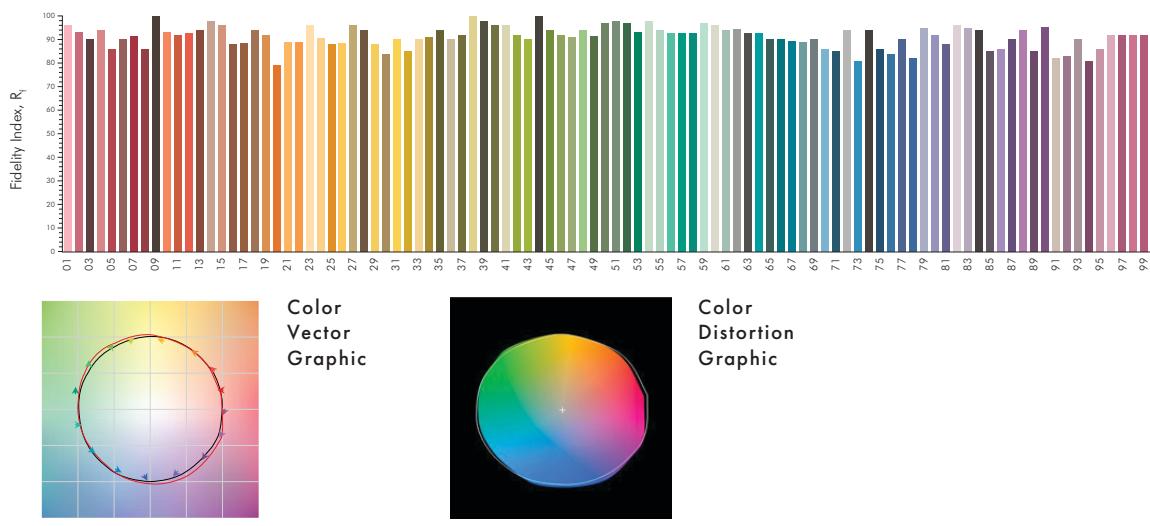


3500K TM30

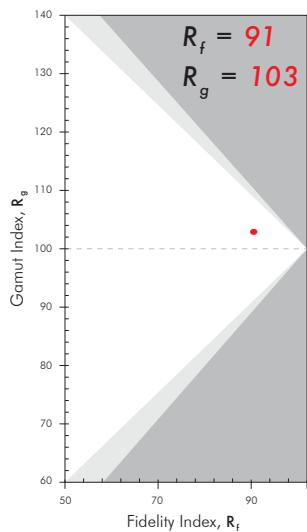


Color Evaluation Sample

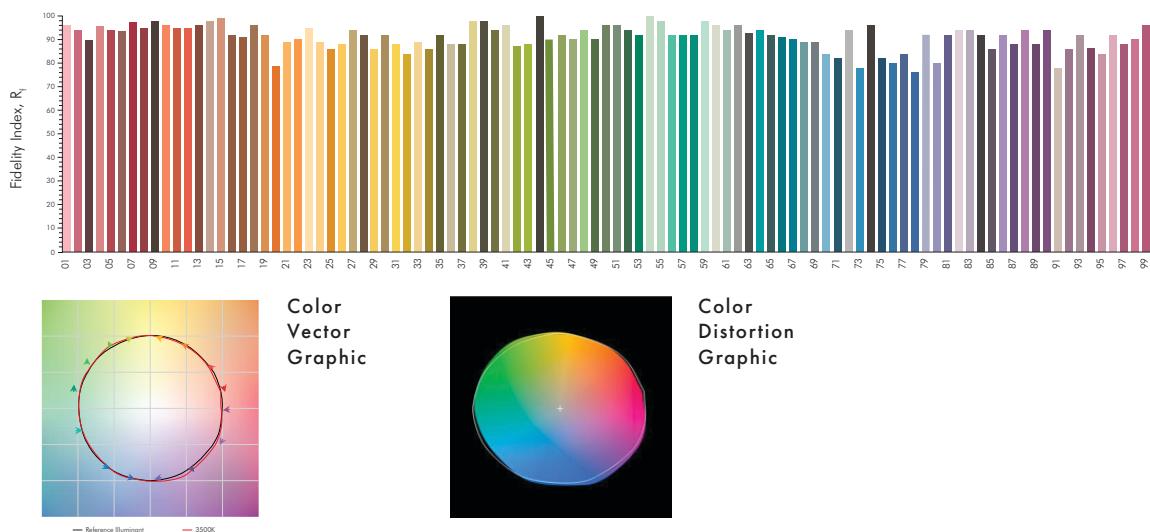


4000K TM30

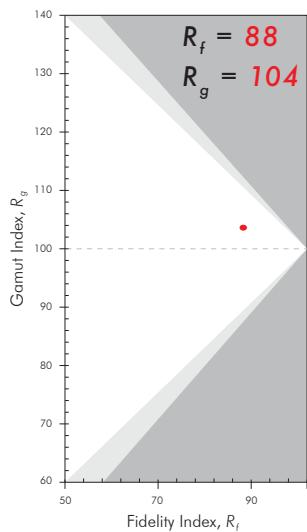


Color Evaluation Sample

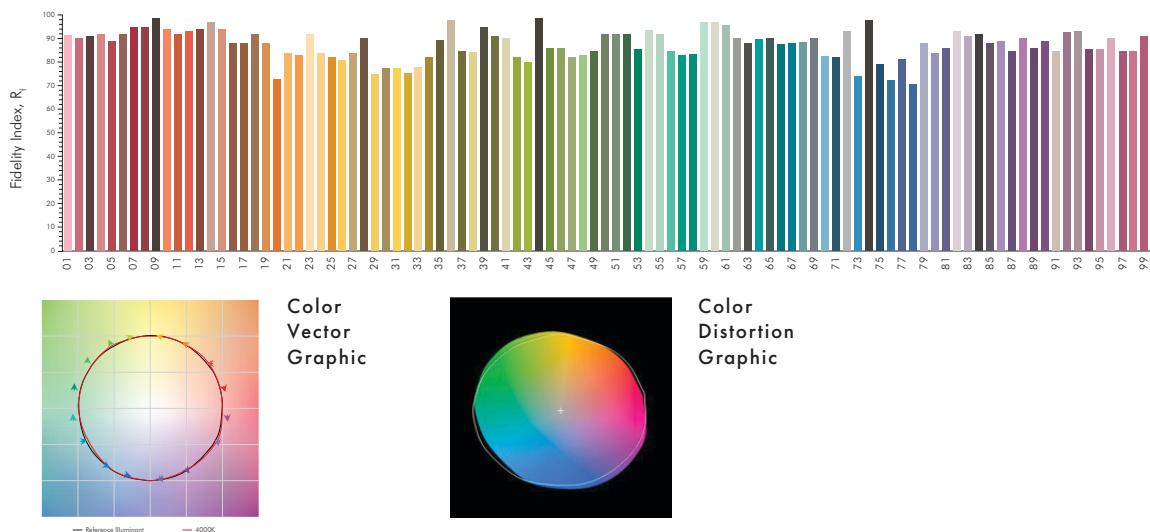

6500K TM30

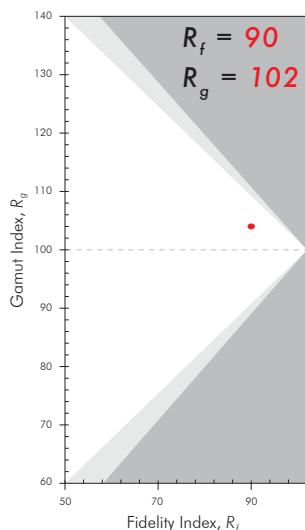


Color Evaluation Sample

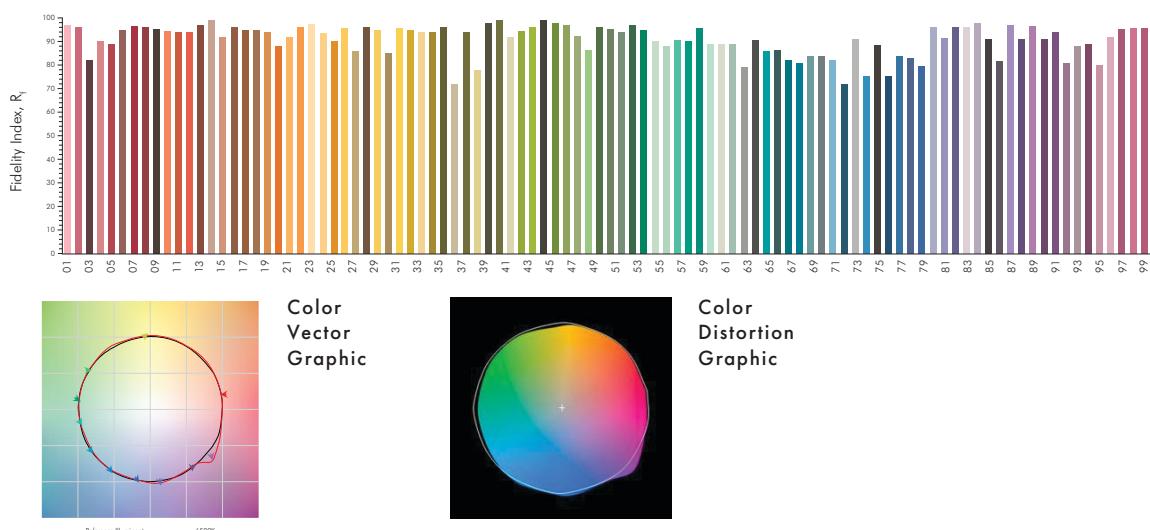

R VALUES


	1800K	2200K	2700K	3000K	3500K	4000K	6500K
R1	98	97	99	98	99	98	98
R2	99	98	99	98	99	98	98
R3	97	97	97	95	97	98	98
R4	98	94	99	98	99	93	94
R5	96	96	99	97	99	95	95
R6	96	94	97	96	97	95	96
R7	95	97	97	97	97	94	95
R8	94	97	95	94	95	94	95
R9	93	93	93	91	93	95	96
R10	97	98	98	92	98	99	99
R11	97	90	97	97	97	94	95
R12	88	92	87	83	87	70	70
R13	98	97	99	98	99	98	99
R14	95	96	97	96	97	99	99
R15	97	99	98	96	98	95	96

CIE 1931 CHROMATICITY DIAGRAM

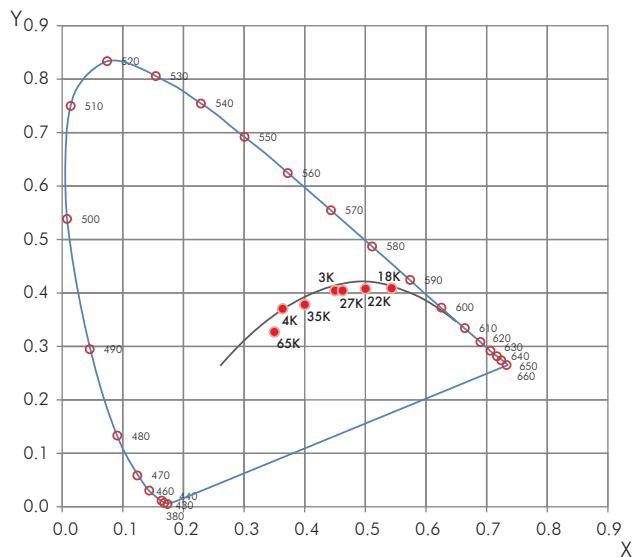


CCT Coordinates


1800K	x: 0.5426	y: 0.4092	u: 0.3012	v: 0.5428
2200K	x: 0.5043	y: 0.4090	u: 0.2924	v: 0.5353
2700K	x: 0.4563	y: 0.4048	u: 0.2628	v: 0.5246
3000K	x: 0.4373	y: 0.4044	u: 0.2507	v: 0.5216
3500K	x: 0.4085	y: 0.3875	u: 0.2391	v: 0.5104
4000K	x: 0.3797	y: 0.3730	u: 0.2240	v: 0.4952
6500K	x: 0.3296	y: 0.3249	u: 0.1832	v: 0.4328

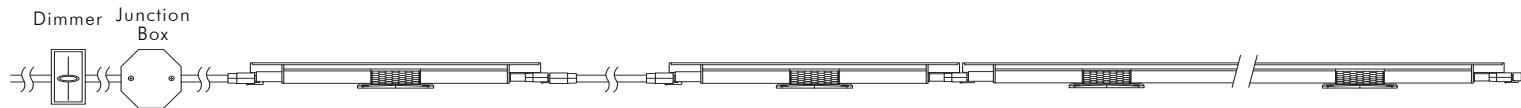

UL / cUL Non-dimming

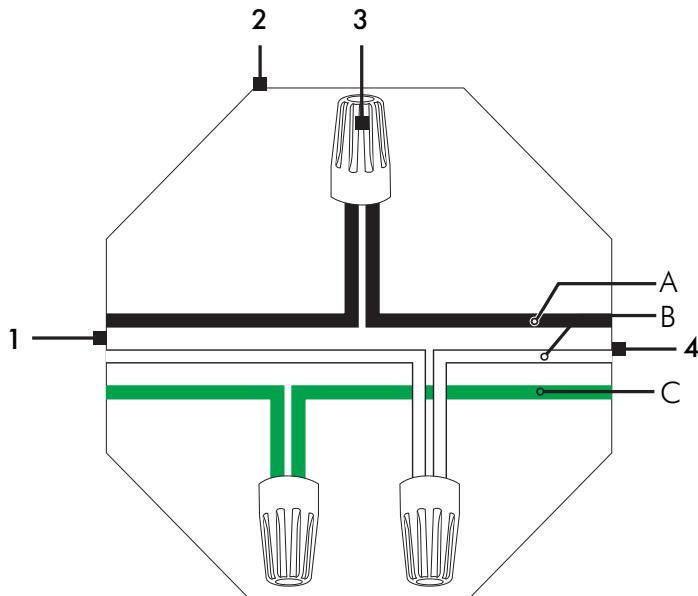

UL / cUL ELV Dimming

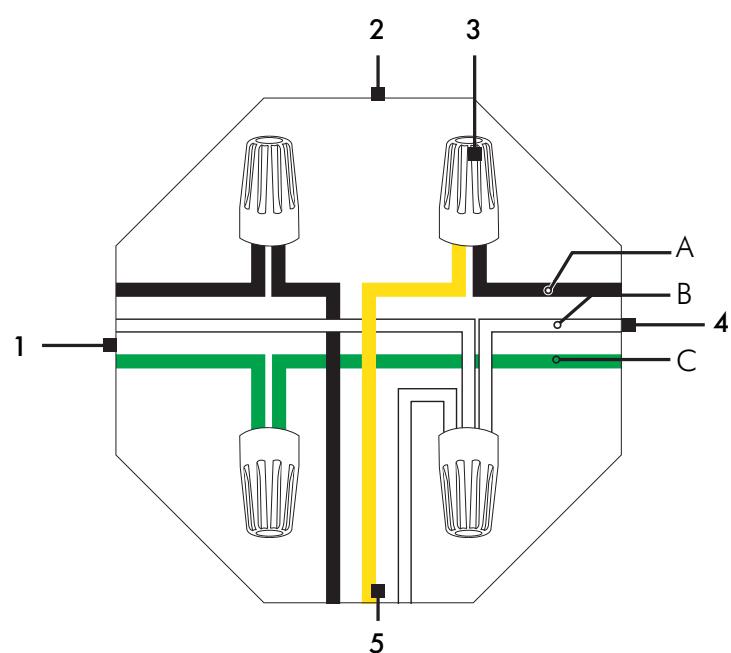

Wiring Legend

1	Power 100-277V AC
2	Junction Box
3	Wiring Nuts
4	3 Pin Leader Cable
5	ELV Dimmer



3 Pin Leader Cable

	UL/cUL	CE/CCC*
A Live 100-277V AC	— Black	— Brown
B Neutral	— White	— Blue
C Ground	— Green	— Green/Yellow


*Not illustrated

ELV Connectors


Male Output



Angle Adjustment




Female Output



Compatible Dimmers


Please visit our website for a list of compatible dimmers.

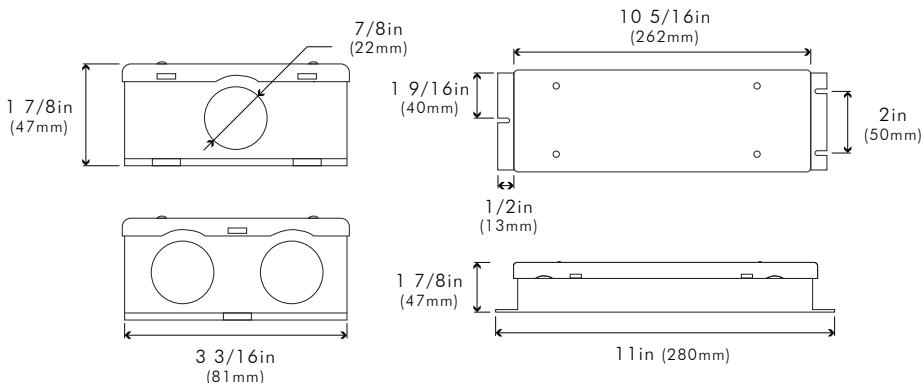

MODA BRIDGE 1 US

CONVERTING 0-10V TO ELV

MODA BRIDGE 1 accepts a standard 0-10V signal from most dimmers and dimming systems and internally converts this signal into an Electronic Low Voltage (ELV) signal, enabling 0-10V control of an ELV fixture. It is optimized to perform precise, smooth, flicker-free dimming down to 0%. Simple wiring with its integral 1/2in holes, which accepts liquid tight or interior conduit connectors. 100-277V 50/60 Hz input. Power up to 840W at 120V, 1600W at 230V, and 1900W at 277V. Outdoor/Damp Location IP65 rated and potted. Fully protected from surge, short circuit, open circuit and over temperature. Power Input and data interface protected with High Grade Surge Protection. Use one MODA BRIDGE1 US per run. Designed and developed by MODA LIGHT, Las Vegas USA.

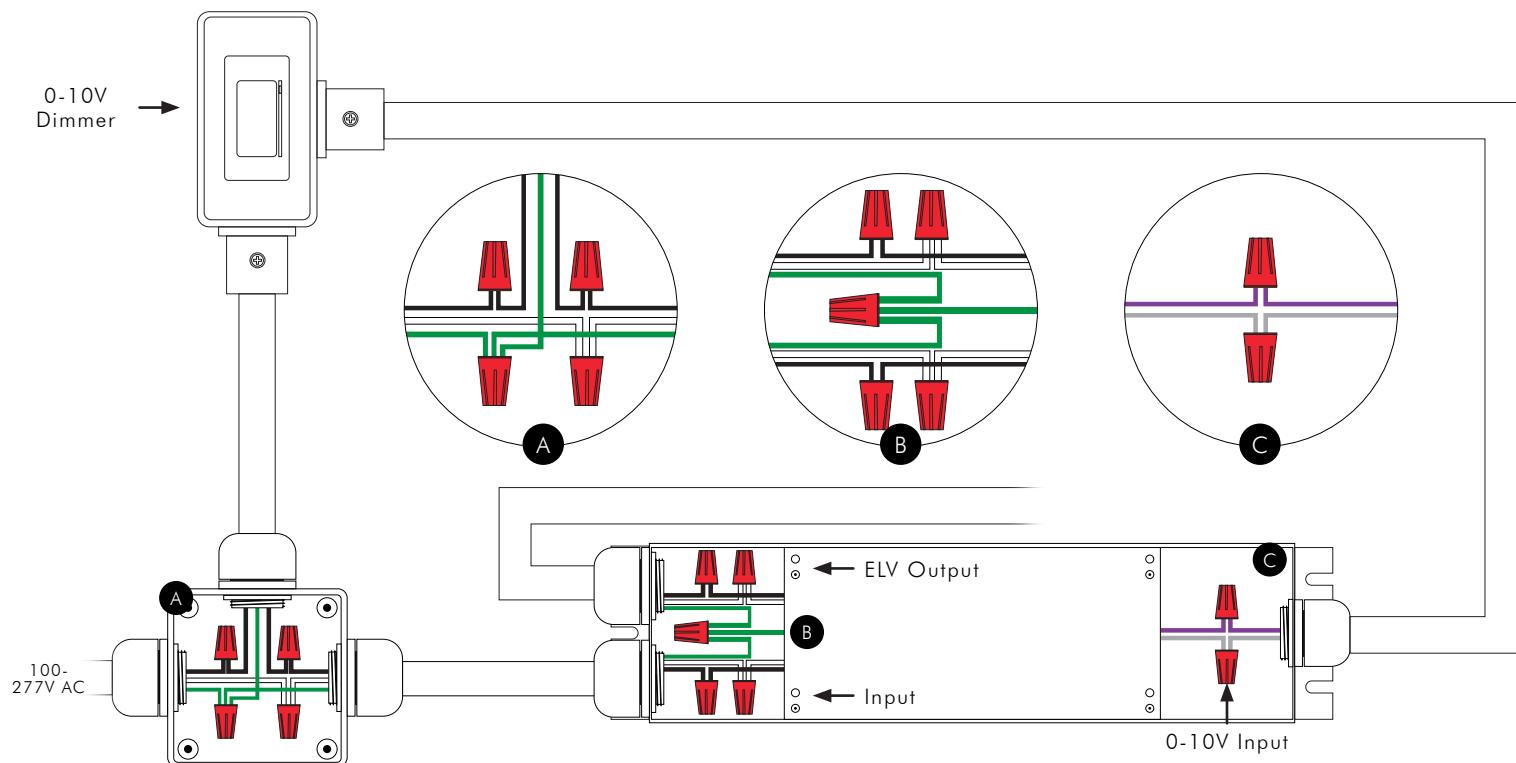

Input


	UL/cUL	CE/CCC*
Live 100-277V	— Black	— Brown
Neutral	— White	— Blue
Ground	— Green	— Green/Yellow
Data +	— Purple	— Black
Data -	— Gray	— Gray

*Not illustrated

Output

	UL/cUL	CE/CCC*
Live 100-277V	— Black	— Brown
Neutral	— White	— Blue
Ground	— Green	— Green/Yellow

*Not illustrated

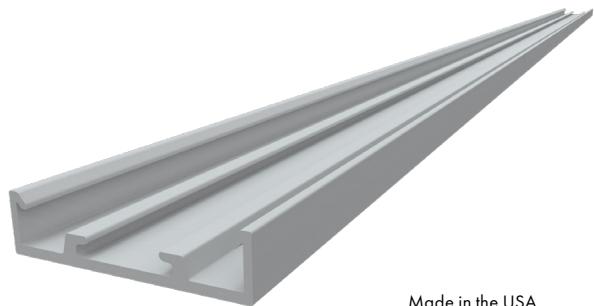

Made in the USA

MODA MINI COVE MOUNTING TRACK

MOUNTING MINI COVE

Allows users to install Moda Mini Cove fixtures in a continuous linear position. Moda Mini Cove Mounting Tracks come packaged in 5 pieces of 4ft sections to create a continuous run of 20ft.

Made in the USA.

Options

Finish G - Gray

Length 4ft - 4ft Sections

Quantity 5 Pieces (20ft)

Physical

Applications Cove, Accent

Construction ABS Plastic



MODA MINI COVE TRACK CONNECTOR

Joins two pieces of track together.

Accepts screw sizes







Drywall	#6	#8
---------	----	----

Self tapping	#6	#8
--------------	----	----

Concrete Anchor	3/16in
-----------------	--------

(By others)

ACCESSORIES: MOUNTING TRACK

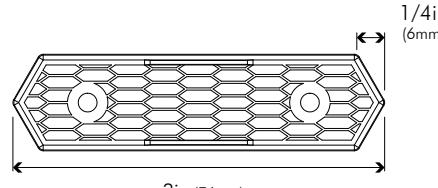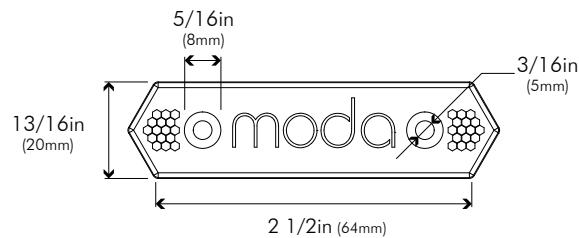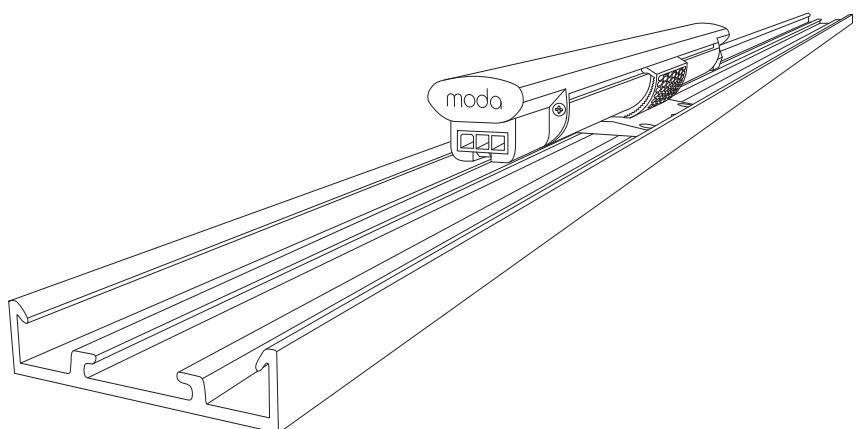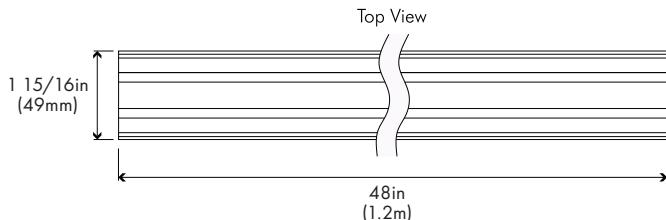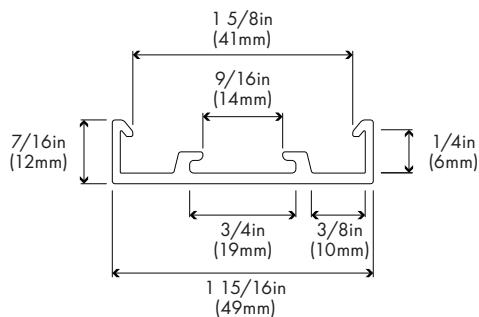



MODA MINI COVE LOUVERS ASYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options




Finish	B - BLACK W - WHITE
--------	------------------------

Length	6IN, 1FT
--------	----------

Physical

Applications	Cove, Accent, Graze
--------------	---------------------

Construction	ABS
--------------	-----

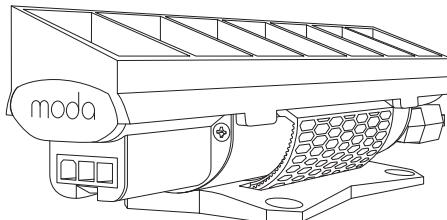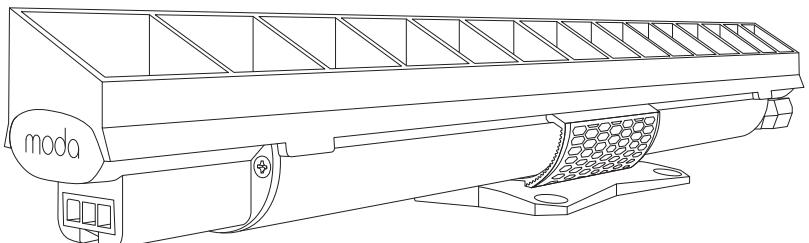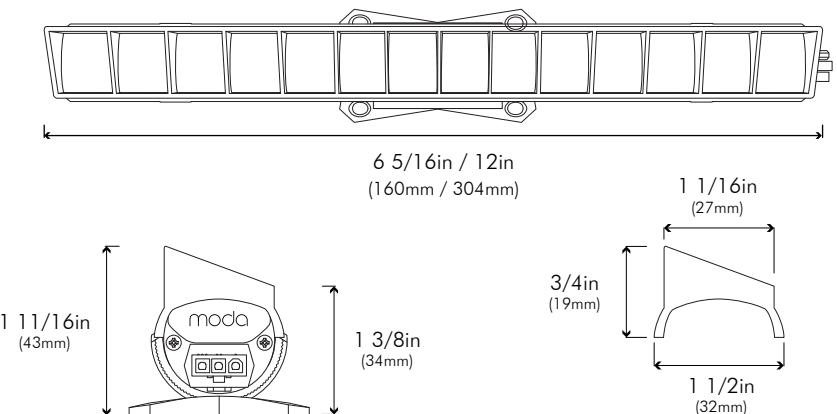

ASYMMETRIC LOUVER PHOTOMETRICS & EFFICACY

6IN SO

	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	120	96	42.86	33.33	29.27
4000K - W	189	97	59.50	50.40	46.50

1FT SO


	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	229	96	47.41	41.49	38.49
4000K - W	337	96	67.20	60.90	57.50

4FT SO

	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	912	96	50.33	48.93	47.75
4000K - W	1169	97	64.30	63.40	62.20

6 INCH SO ILLUMINANCE AT A DISTANCE

SO 4000K - BLACK

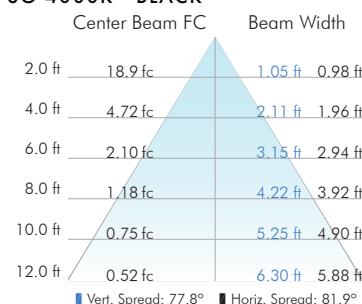

1FT HO

	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	450	96	46.44	44.96	43.31
4000K - W	622	96	65.20	62.30	60.20

4FT HO


	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	1804	96	50.75	49.85	48.70
4000K - W	2190	97	61.20	60.00	58.90

1 FOOT ILLUMINANCE AT A DISTANCE

SO 4000K - BLACK




SO 4000K - WHITE

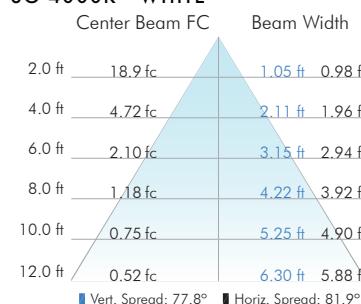

SO 4000K - WHITE




HO 4000K - WHITE

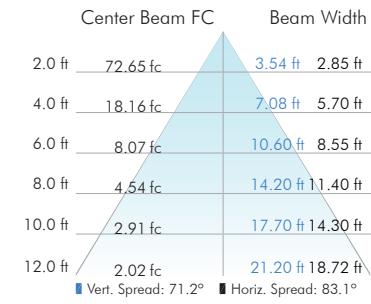

4 FOOT ILLUMINANCE AT A DISTANCE


SO 4000K - BLACK

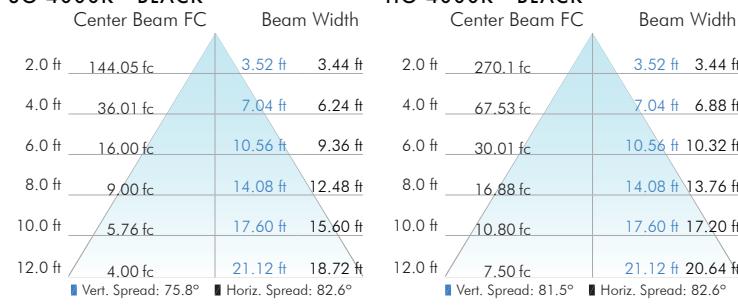

SO 4000K - WHITE



HO 4000K - WHITE

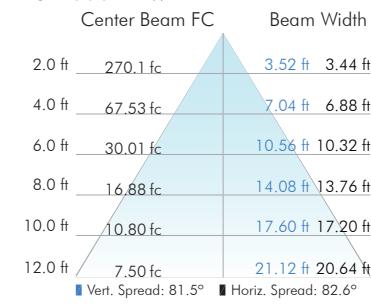



MODA MINI COVE LOUVERS SYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options




Finish	B - BLACK W - WHITE
--------	------------------------

Length	6IN, 1FT
--------	----------

Physical

Applications	Cove, Accent, Graze
--------------	---------------------

Construction	ABS
--------------	-----

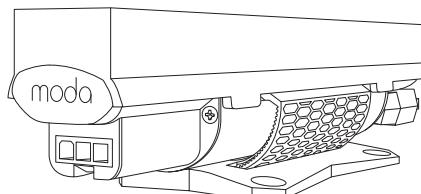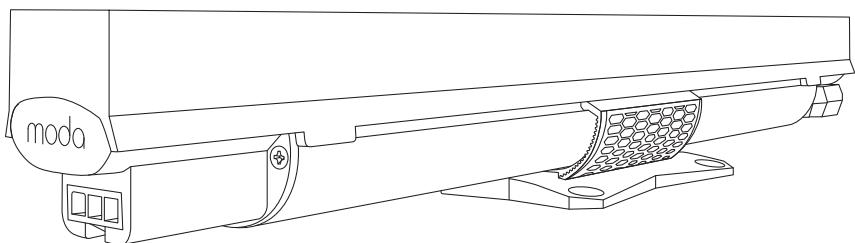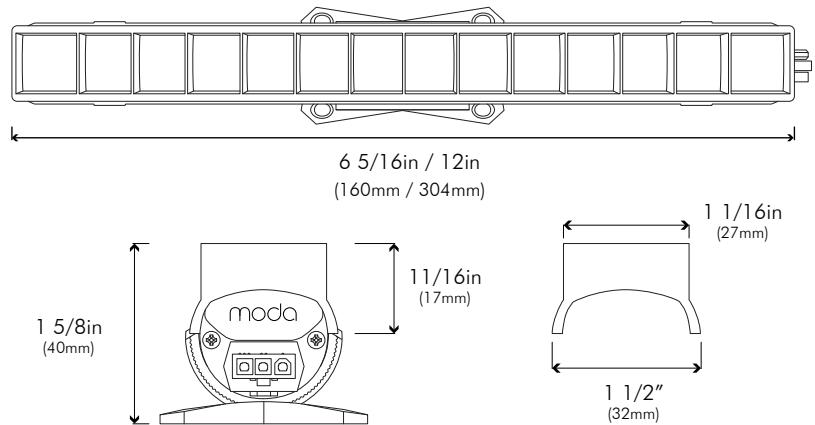

SYMMETRIC LOUVER PHOTOMETRICS & EFFICACY

6IN SO

	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	110	96	39.29	30.56	26.83
4000K - W	179	97	55.80	47.20	44.00

1FT SO


	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	196	96	40.41	35.32	32.89
4000K - W	324	96	65.00	58.30	55.50

4FT SO

	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	756	96	41.29	40.45	39.66
4000K - W	1103	97	60.10	60.10	59.00


6 INCH SO ILLUMINANCE AT A DISTANCE

SO 4000K - BLACK

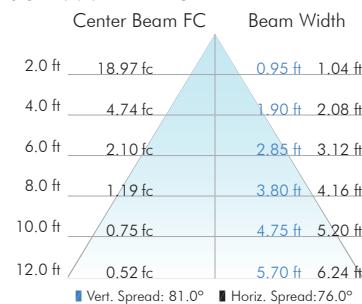


1 FOOT ILLUMINANCE AT A DISTANCE


SO 4000K - BLACK

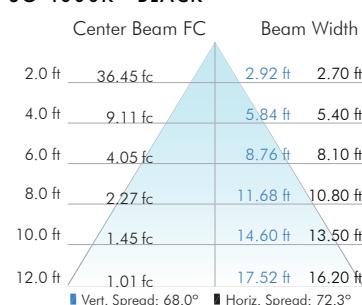

HO 4000K - BLACK

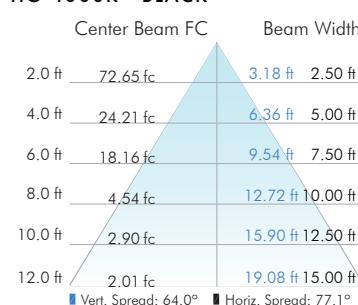


SO 4000K - WHITE

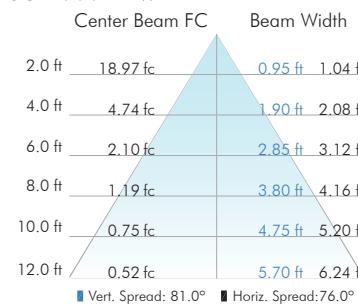

SO 4000K - WHITE



HO 4000K - WHITE

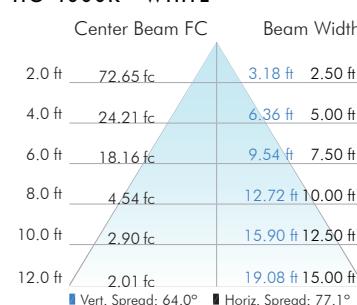


4 FOOT ILLUMINANCE AT A DISTANCE

SO 4000K - BLACK




HO 4000K - BLACK

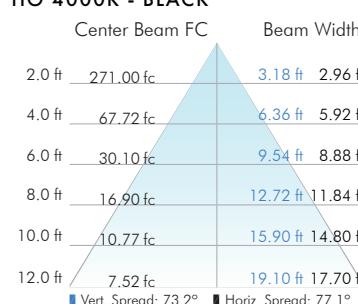


SO 4000K - WHITE



HO 4000K - WHITE

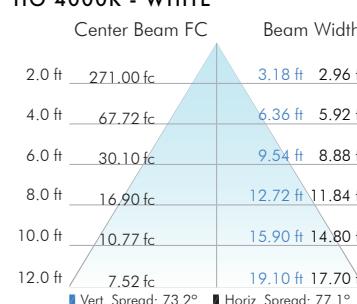

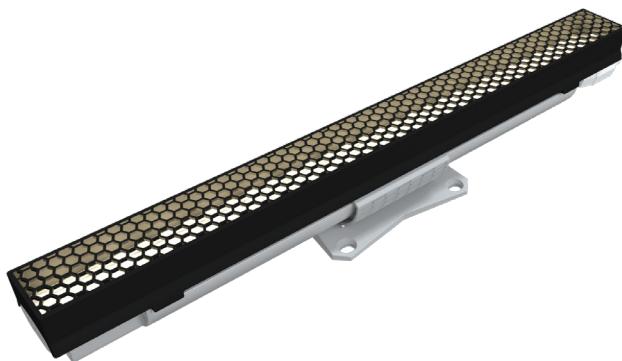

MODA MINI COVE LOUVERS HONEYCOMB

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options




Finish	B - BLACK W - WHITE
--------	------------------------

Length	6IN, 1FT
--------	----------

Physical

Applications	Cove, Accent, Graze
--------------	---------------------

Construction	ABS
--------------	-----

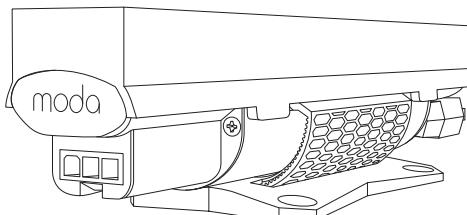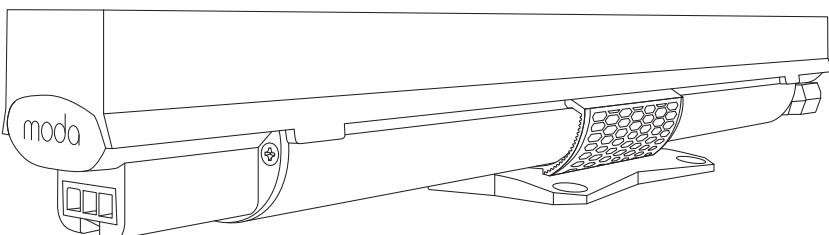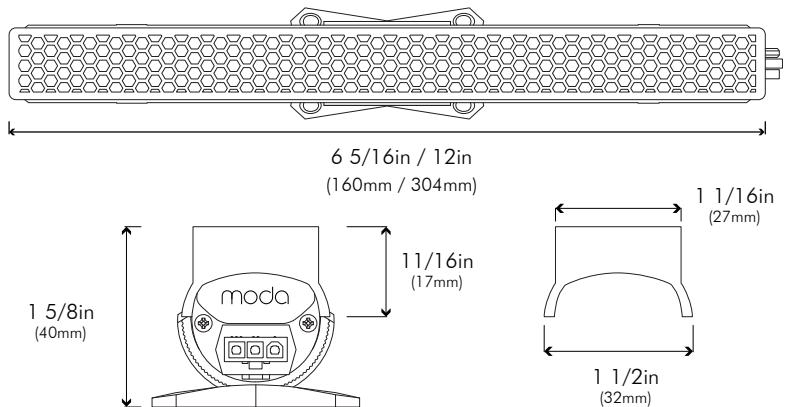

HONEYCOMB LOUVER PHOTOMETRICS & EFFICACY

6IN SO

	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	67	96	23.93	18.61	16.34
4000K - W	152	97	48.10	40.40	37.50

1FT SO


	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	138	96	28.57	24.91	23.12
4000K - W	274	97	54.90	49.60	46.60

4FT SO

	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	570	96	31.37	30.66	30.06
4000K - W	952	97	52.30	52.00	51.10

6 INCH SO ILLUMINANCE AT A DISTANCE

SO 4000K - BLACK

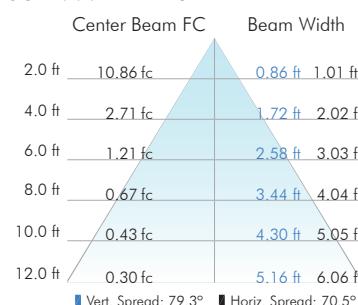

1FT HO


	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	273	96	28.26	27.41	26.58
4000K - W	515	97	54.30	51.80	49.90

4FT HO


	EFFICACY				
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K - B	949	96	26.69	26.38	25.87
4000K - W	1782	97	49.50	49.10	48.30

1 FOOT ILLUMINANCE AT A DISTANCE


SO 4000K - BLACK

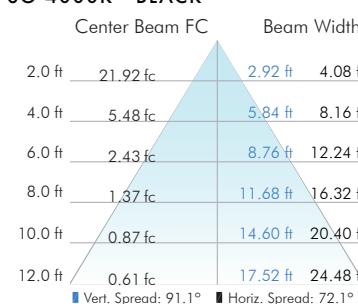


HO 4000K - BLACK

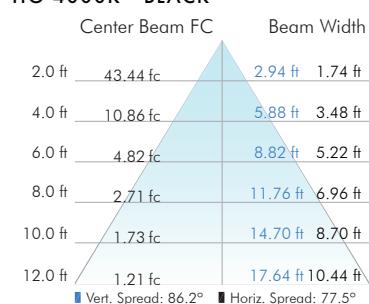

SO 4000K - WHITE

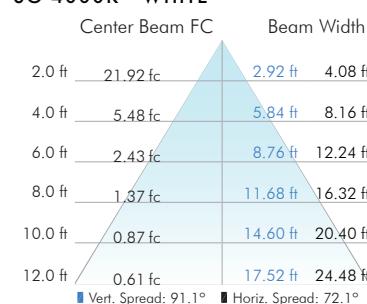


HO 4000K - WHITE

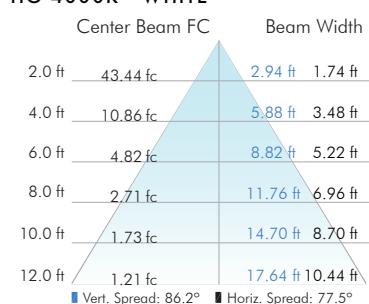


4 FOOT ILLUMINANCE AT A DISTANCE


SO 4000K - BLACK

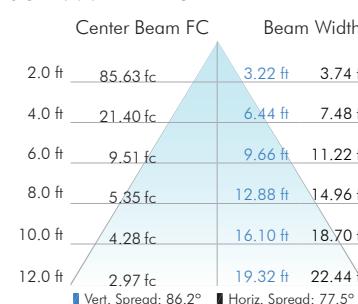


HO 4000K - BLACK

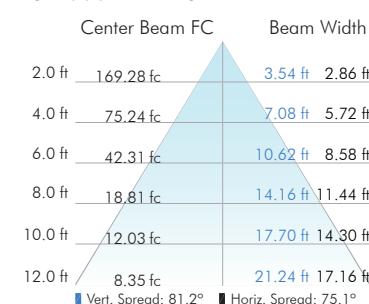

SO 4000K - WHITE

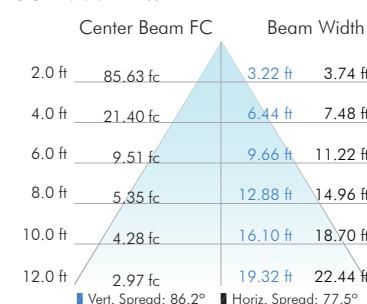

HO 4000K - WHITE

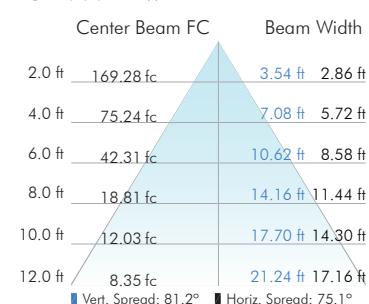



MODA MINI COVE LOUVERS BLADE

Add visual interest to any space by creating a narrow line of light, which can be seen in semi direct view or reflected off the wall or ceiling when integrated into a cove or niche. Use four 1ft louvers for a 4ft fixture.

Features




- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options

Finish	B - BLACK
Length	6IN, 1FT

Physical

Applications	Cove, Accent, Graze
Construction	ABS

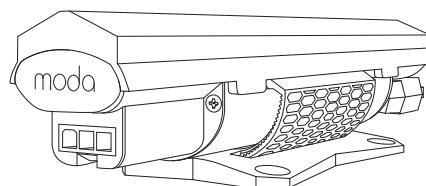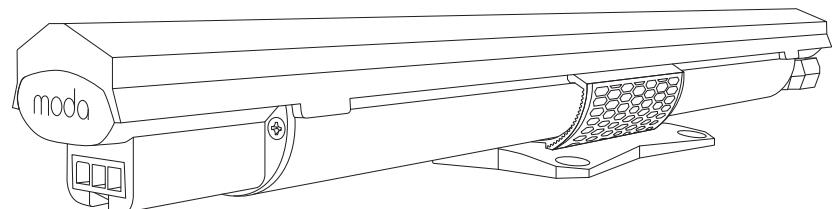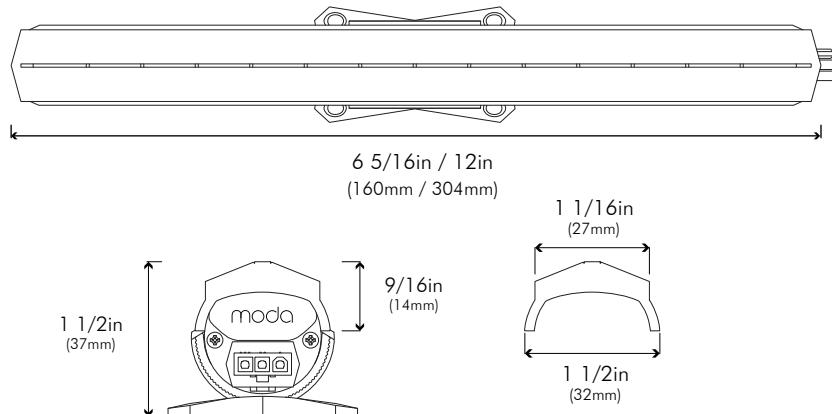

BLADE LOUVER PHOTOMETRICS & EFFICACY

6IN SO		EFFICACY			
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K	9.6	96	3.43	2.67	2.34

1FT SO		EFFICACY			
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K	14	96	2.91	2.54	2.35


4FT SO		EFFICACY			
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K	52	96	2.88	2.81	2.74

1FT HO		EFFICACY			
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K	27	96	2.81	2.72	2.64

4FT HO		EFFICACY			
	LUMENS	CRI	120V AC	240V AC	277V AC
4000K	100	96	2.84	2.79	2.73


6 INCH SO ILLUMINANCE AT A DISTANCE

SO 4000K

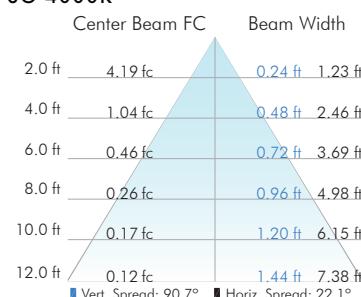


1 FOOT ILLUMINANCE AT DISTANCE

SO 4000K

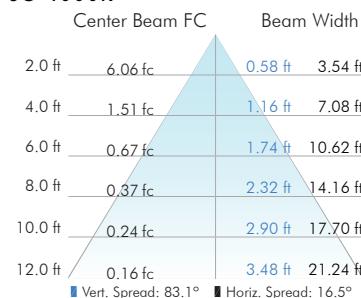


HO 4000K

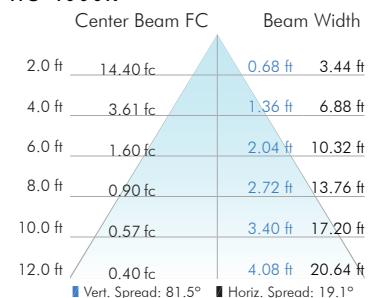


4 FOOT ILLUMINANCE AT DISTANCE

SO 4000K

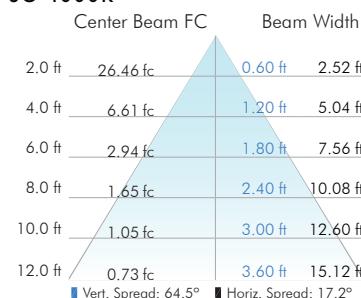


HO 4000K

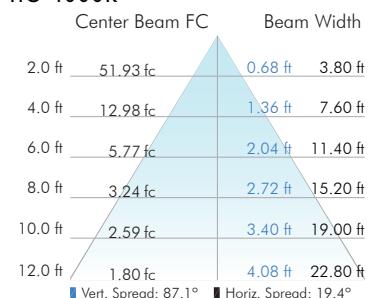


ELV LEADER CABLES

Moda Mini Cove Interior 3 Pin Leader Cables


	UL/cUL	EU/CCC
Lengths	10FT and 25FT	3M and 10M
Color	White	White

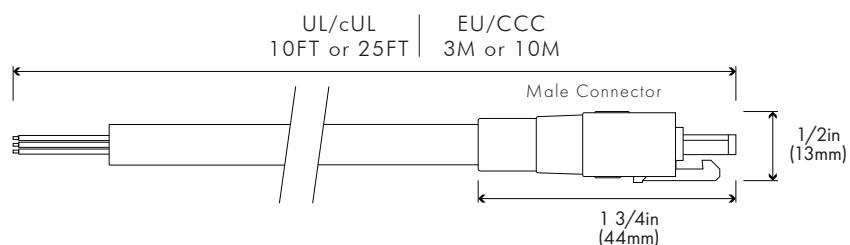

Male Connector

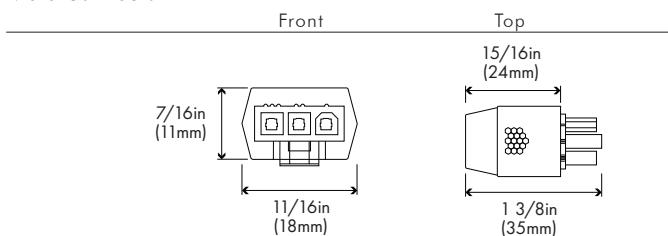

Pin Assignment




UL/cUL EU/CCC

	UL/cUL	EU/CCC
1	Live 100-277V	Black
2	Ground	Green
3	Neutral	White


ELV JUMPER CABLES

Moda Mini Cove Interior 3 Pin Jumper Cables


	UL/cUL	EU/CCC
Lengths	1FT and 4FT	300MM and 1M
Color	White	White

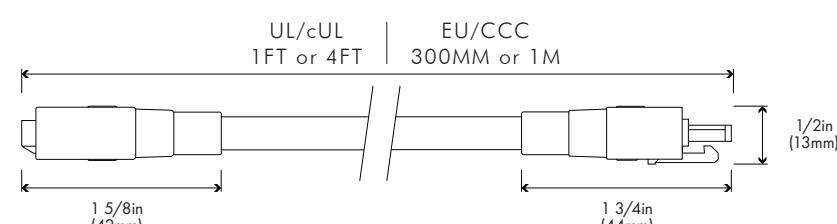

Female Connector

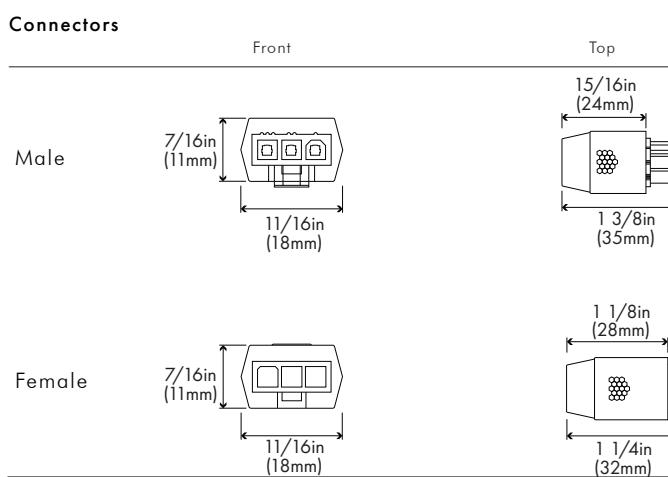


Pin Assignment



Male

UL/cUL EU/CCC

	UL/cUL	EU/CCC
1	Live 100-277V	Black
2	Ground	Green
3	Neutral	White



Female

UL/cUL EU/CCC

	UL/cUL	EU/CCC
1	Neutral	White
2	Ground	Green
3	Live 100-277V	Black

Fixture	Part Number	Quickship	Ordering SKU
Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 6IN	MMCI-S-S-E-18H-6		090-0001
Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 6IN	MMCI-S-S-E-22H-6		090-0003
ELV SO 6IN Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 6IN	MMCI-S-S-E-27H-6		090-0005
Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 6IN	MMCI-S-S-E-30H-6		090-0006
Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 6IN	MMCI-S-S-E-35H-6		090-0008
Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 6IN	MMCI-S-S-E-40H-6		090-0009
Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 6IN	MMCI-S-S-E-65H-6		090-0014
Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 1FT	MMCI-S-S-E-18H-1		090-1001
Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 1FT	MMCI-S-S-E-22H-1		090-1003
ELV SO 1FT Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 1FT	MMCI-S-S-E-27H-1	✓	090-1005
Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 1FT	MMCI-S-S-E-30H-1	✓	090-1006
Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 1FT	MMCI-S-S-E-35H-1	✓	090-1008
Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 1FT	MMCI-S-S-E-40H-1	✓	090-1009
Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 1FT	MMCI-S-S-E-65H-1		090-1014
Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 1FT	MMCI-H-S-E-18H-1		090-1201
Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 1FT	MMCI-H-S-E-22H-1		090-1203
ELV HO 1FT Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 1FT	MMCI-H-S-E-27H-1	✓	090-1205
Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 1FT	MMCI-H-S-E-30H-1	✓	090-1206
Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 1FT	MMCI-H-S-E-35H-1	✓	090-1208
Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 1FT	MMCI-H-S-E-40H-1	✓	090-1209
Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 1FT	MMCI-H-S-E-65H-1		090-1214
Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 4FT	MMCI-S-S-E-18H-4		090-3001
Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 4FT	MMCI-S-S-E-22H-4		090-3003
ELV SO 4FT Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 4FT	MMCI-S-S-E-27H-4	✓	090-3005
Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 4FT	MMCI-S-S-E-30H-4	✓	090-3006
Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 4FT	MMCI-S-S-E-35H-4	✓	090-3008
Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 4FT	MMCI-S-S-E-40H-4	✓	090-3009
Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 4FT	MMCI-S-S-E-65H-4		090-3014
Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 4FT	MMCI-H-S-E-18H-4		090-3201
Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 4FT	MMCI-H-S-E-22H-4		090-3203
ELV HO 4FT Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 4FT	MMCI-H-S-E-27H-4	✓	090-3205
Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 4FT	MMCI-H-S-E-30H-4	✓	090-3206
Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 4FT	MMCI-H-S-E-35H-4	✓	090-3208
Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 4FT	MMCI-H-S-E-40H-4	✓	090-3209
Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 4FT	MMCI-H-S-E-65H-4		090-3214

QUICKSHIP

✓ Eligible for Moda Quick Ship

ACCESSORIES	DESCRIPTION	PART NUMBER	QUICKSHIP	ORDERING SKU
Leader Cable US 3 Pin 10FT	Power to first fixture of run	MLCI-US-3PIN-W-10FT	✓	299-0000
Leader Cable US 3 Pin 25FT	Power to first fixture of run	MLCI-US-3PIN-W-25FT	✓	299-0002
Jumper Cable US 3 Pin 1FT	Connection between fixtures	MJCI-US-3PIN-W-1FT	✓	299-1000
Jumper Cable US 3 Pin 4FT	Connection between fixtures	MJCI-US-3PIN-W-4FT	✓	299-1002
Leader Cable EU 3 Pin 3M	Power to first fixture of run	MLCI-EU-3PIN-W-3M		299-0001
Leader Cable EU 3 Pin 10M	Power to first fixture of run	MLCI-EU-3PIN-W-10M		299-0003
Jumper Cable EU 3 Pin 300MM	Connection between fixtures	MJCI-EU-3PIN-W-300MM		299-1001
Jumper Cable EU 3 Pin 1M	Connection between fixtures	MJCI-EU-3PIN-W-1M		299-1003
Terminator 3 Pin	Must be fixed to last fixture for safety	MTI-3PIN-W	✓	299-2000
Mounting Track 20FT	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G	✓	299-3200
Mounting Track Connector	Interior track connector	N/A	✓	299-3202
Symmetric Louver 6IN - Black	Symmetric louver for light control	N/A	✓	299-4220
Symmetric Louver 6IN - White	Symmetric louver for light control	N/A	✓	299-4320
Asymmetric Louver 6IN - Black	Asymmetric louver for light control	N/A	✓	299-4221
Asymmetric Louver 6IN - White	Asymmetric louver for light control	N/A	✓	299-4321
Honeycomb Louver 6IN - Black	Honeycomb louver for light control	N/A	✓	299-4222
Honeycomb Louver 6IN - White	Honeycomb louver for light control	N/A	✓	299-4322
Blade Louver 6IN - Black	Blade louver for light control	N/A	✓	299-4223
Symmetric Louver 1FT - Black	Symmetric louver for light control	N/A	✓	299-4230
Symmetric Louver 1FT - White	Symmetric louver for light control	N/A	✓	299-4330
Asymmetric Louver 1FT - Black	Asymmetric louver for light control	N/A	✓	299-4231
Asymmetric Louver 1FT - White	Asymmetric louver for light control	N/A	✓	299-4331
Honeycomb Louver 1FT - Black	Honeycomb louver for light control	N/A	✓	299-4232
Honeycomb Louver 1FT - White	Honeycomb louver for light control	N/A	✓	299-4332
Blade Louver 1FT - Black	Blade louver for light control	N/A	✓	299-4233

CONTROLS	DESCRIPTION	PART NUMBER	QUICKSHIP	ORDERING SKU
Bridge 1 US	Allows user to convert a 0-10V dimming signal to an ELV dimming signal. North American Model.	MODA-BRIDGE-1-Sx-S	✓	250-0000

QUICKSHIP

✓ Eligible for Moda Quick Ship