



Client: \_\_\_\_\_ Project Name: \_\_\_\_\_  
 MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_  
 Type: \_\_\_\_\_ PO #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Notes: \_\_\_\_\_



#### Miniature Line Voltage GRAZE Color Fixture.

MODA MINI GRAZE COLOR INTERIOR is an award winning, patented, miniature line voltage cove lighting system. Now available in mono static colors, these unique colors can enhance any environment. For projects which require a unique static color the only way to achieve this is by mixing red, green and blue colors with DMX512 controls, DMX512 enabled fixtures, DMX wiring and time to program the specific color required. All of this has a cost. This is now eliminated by choosing MODA MINI Graze Color. No longer do you have to worry about the red die degrading faster than green and blue dies, hence having a shift over time with the specific color the designer has chosen. Enjoy worry free simple color specific fixtures. Easy 3 wire connections for on/off or ELV dimming control, or standard 5 wire for 0-10V installations. This drastically reduces installation time and cost. Choose from Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Dark Blue, Dark Orange, Dark Red, or Turquoise. If a project requires a custom color, we are able to create that color in our laboratory with our own ability to mix proprietary MODA Phosphor to create virtually any color required.

Unlike other fixtures which are much larger in physical size, MINI GRAZE utilizes the latest Advanced MODA Design and Electronic Engineering, ensuring fixtures are cool to the touch. This is achieved by designing a forward thinking fixture with intelligent driver technology and by under driving the most advanced LEDs in the world, creating a fixture which is so cool it can be held after days of illumination. The L70 (longevity) of the fixture is extended and phosphor degradation is kept to a minimum.

The Onboard American Dimming Chipset, programmed by our MODA Software Division with new Advanced Firmware, enables MINI GRAZE to deliver smooth, no noise, flicker-free and synchronized dimming down to 0% with ELV or 0-10V Dimmers. Choose from either ELV or 0-10V direct dimming fixtures. Unlike other fixtures in the marketplace there is no need to purchase additional adapters, converters, dimming boxes or control modules. Just use conventional wiring direct from the dimmer to create a powerful lighting system, saving time and money. Link any combination of 1ft and 4ft fixtures and every fixture will dim together smoothly, synchronized from 100% to 0%. With no minimum run lengths, just one 1ft fixture will dim seamlessly to 0%.

With MINI GRAZE the installer is able to achieve long single runs of up to 240 feet decreasing the number of wiring circuits required in an installation. Another step forward in this category of small sized fixtures is the universal power input. We designed a small MODA Micro Driver specific for MINI GRAZE enabling it to accept 100-277V AC 50/60 Hz, thus decreasing the number of SKUs needed to be held by any of our worldwide distributors and giving the installer a choice of power inputs from one fixture.

A specialized curved polymer optical lens combined with a cleverly designed Light Chamber delivers a light bending, smooth 30° X 100° beam pattern perfect for cove installations with no color over angle, no striations, interlocking fields of light and no dark spots.

The fixture incorporates an integral, patented, toolless, self-locking bracket which slides into any position and turns 170 degrees. Built-in male & female connectors with thumb latch connections for fast installation time. Lightweight aluminum construction for durability and excellent thermal characteristics. Quality American made electronic components. 1ft and 4ft lengths are for fast installation saving expensive labor installation costs and achieving long runs of quality illumination in rapid time.

Tested by Intertek to UL1598 for use in USA & Canada. CE Approved. WEE. RoHS Compliant. TM-30-15 Tested. US Patent No. D787,112 and D783,890.

Product Innovation Award (PIA) Winner 2016 for Best Luminaire. LFI Innovation Award 2017 Finalist for Dynamic Color, Theatrical, Cove, Strips and Tape. Lux Award Commended for Interior Product of the Year 2016. Darc Awards Finalist for Best Architectural Lighting Product - Interior Luminaires 2016. International Design Excellence Award for Innovative Product Design Finalist 2016.

Designed & Developed by MODA LIGHT in Las Vegas, USA.

PAGE

<b>3</b>	FEATURES
<b>4</b>	1 FOOT
<b>5</b>	1 FOOT SO POLAR CANDELAS
<b>6</b>	1 FOOT HO POLAR CANDELAS
<b>7</b>	1 FOOT SO ILLUMINANCE
<b>8</b>	1 FOOT HO ILLUMINANCE
<b>9</b>	4 FOOT
<b>10</b>	4 FOOT SO POLAR CANDELAS
<b>11</b>	4 FOOT HO POLAR CANDELAS
<b>12</b>	4 FOOT SO ILLUMINANCE
<b>13</b>	4 FOOT HO ILLUMINANCE
<b>14</b>	CHROMATICITY
<b>15</b>	0-10V WIRING
<b>16</b>	GRAZING
<b>17</b>	ACCESSORIES: MOUNTING TRACK
<b>18</b>	ACCESSORIES: ASYMMETRIC LOUVERS
<b>19</b>	ACCESSORIES: SYMMETRIC LOUVERS
<b>20</b>	ACCESSORIES: HONEYCOMB LOUVERS
<b>21</b>	ACCESSORIES: BLADE LOUVERS
<b>22</b>	ACCESSORIES: CABLES
<b>23</b>	FIXTURES & ACCESSORIES
<b>24</b>	FIXTURES & ACCESSORIES
<b>25</b>	FIXTURES & ACCESSORIES

## PHYSICAL

Dimensions	L: 12in (304mm) L: 48in (1219mm)	W: 1 13/16in(46mm) H: 1 3/16in(34mm)
Weights	1ft: 0.38 lbs (0.17kg) 4ft: 1.22 lbs (0.55 kg)	
Applications	Graze, Accent & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	MODA Aluminum Heat Sink	
Beam Angle	30° X 100°	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

## OUTPUT

Colors	Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Turquoise, Dark Blue, Dark Orange, and Dark Red available
Color Bin Tolerance	Zero Bin
CRI	N/A
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

## DIMMING

	Outputs Available
1FT	SO, HO
4FT	SO, HO

## MODA TECHNOLOGY

modaSOFTWARE™

modaHARDWARE™

modaDIM™

modaLED™

modaMICRO DRIVER™

modaPHOSPHOR™

modaZERO BIN™

modaTHERMAL MANAGEMENT™

modaAIRFLOW™

modaCOLOR RENDITION™

modaLOCK™

modaKWIK CONNECT™

modaLINEAR OPTIC™

## STANDARDS & CERTIFICATIONS




RoHS ✓



Certification Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.

Class 1

Warranty 5 Year Limited Warranty

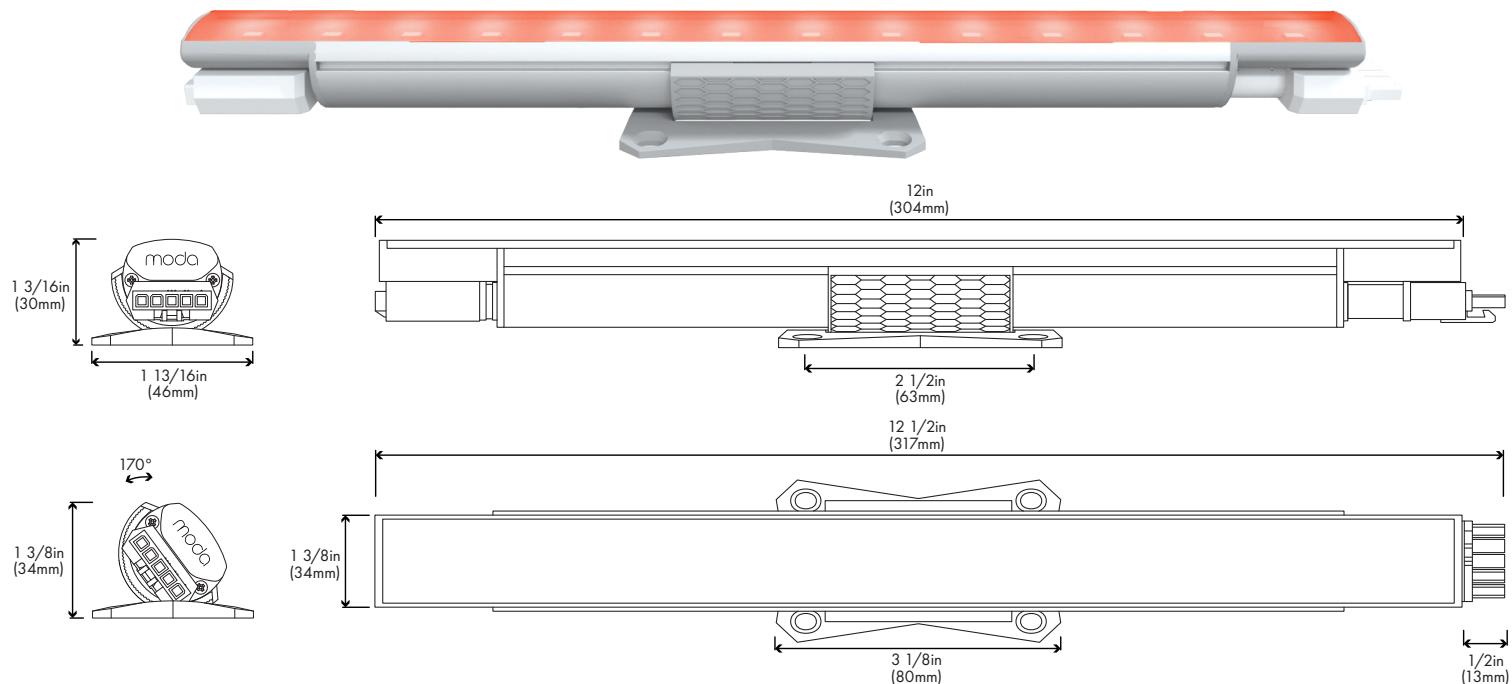

## 0-10V

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	168	36	31	29
Green	196	42	36	34
Blue	140	30	25	24
Amber	234	50	43	40
Yellow	215	46	39	37
Golden Yellow	509	108	93	88
Ice Blue	429	91	78	74
Cyan	169	36	31	29
Light Green	490	104	89	84
Pink	200	43	36	34
Violet	194	41	35	33
Turquoise	168	36	31	29
Dark Blue	84	18	15	14
Dark Orange	420	89	76	72
Dark Red	39	9	6	6

SO Power Consumption	SO Max Continuous Run*
120V	5W
240V	6.5W
277V	6.5W

240V AC	240ft
120V AC	120ft
277V AC	240ft

Each connection uses 0.1mA power for SO and 0.2mA for HO. Please check chosen dimmer for any mA restriction (i.e., 50mA restriction = maximum 500 connections for SO and 250 for HO).

High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	336	36	34	34
Green	395	42	40	40
Blue	286	30	29	29
Amber	464	49	47	46
Yellow	430	46	43	43
Golden Yellow	1015	108	103	102
Ice Blue	858	91	87	86
Cyan	338	36	34	34
Light Green	980	104	99	98
Pink	402	43	41	40
Violet	388	41	39	39
Turquoise	341	36	34	34
Dark Blue	168	50	47	47
Dark Orange	840	89	85	84
Dark Red	78	18	12	12


HO Power Consumption	HO Max Continuous Run*
120V	10W
240V	13W
277V	13W


277V AC	100ft
120V AC	50ft
240V AC	100ft

## STANDARD OUTPUT


**SO Red**

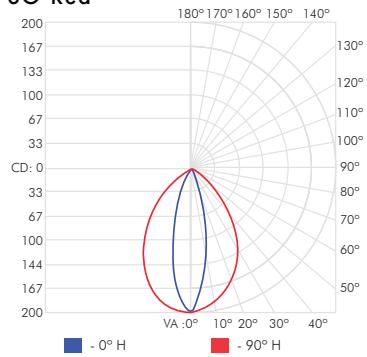


**SO Green**

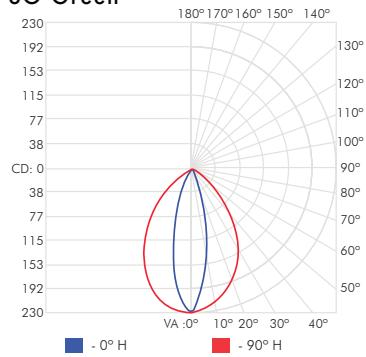


**SO Blue**

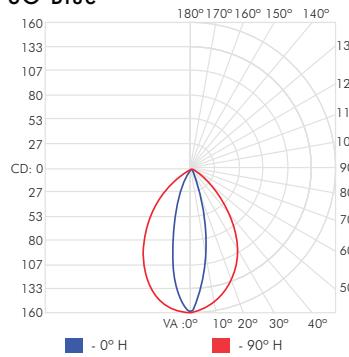


**SO Amber**

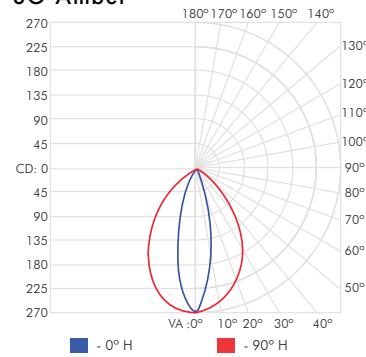


**SO Yellow**

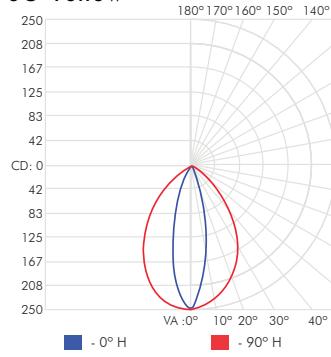


**SO Golden Yellow**

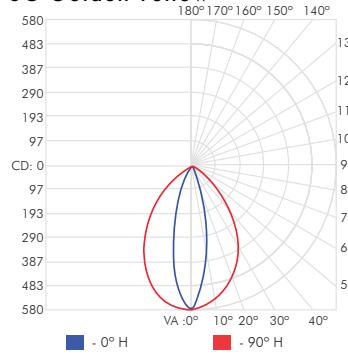


**SO Ice Blue**

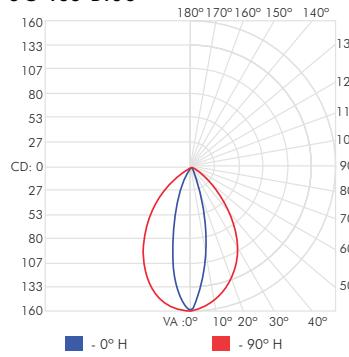


**SO Cyan**

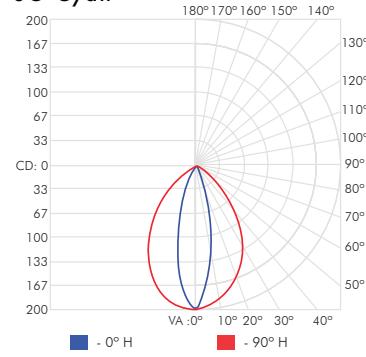


**SO Light Green**

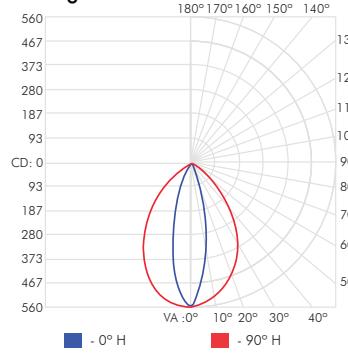


**SO Pink**

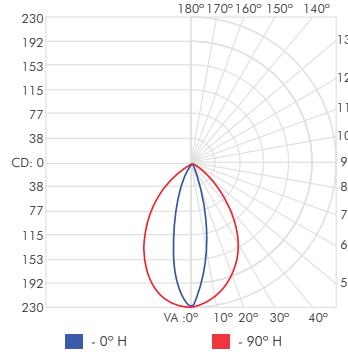


**SO Violet**

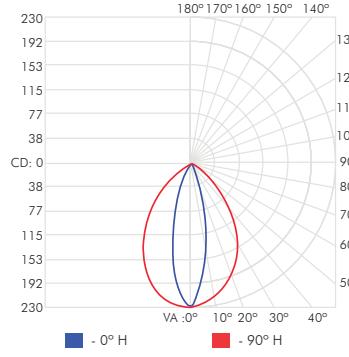


**SO Turquoise**

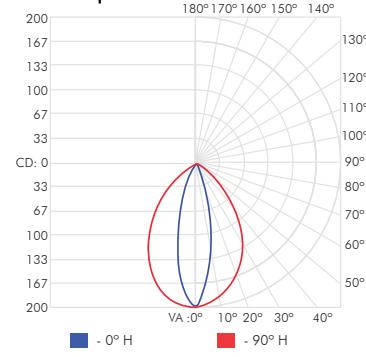


**SO Dark Blue**

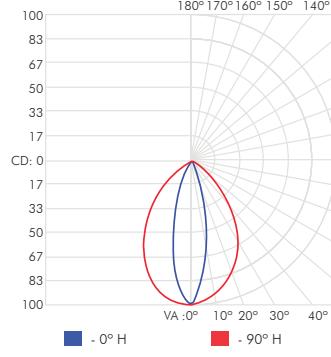

**SO Dark Orange**

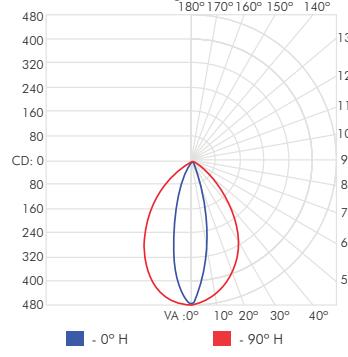


**SO Dark Red**

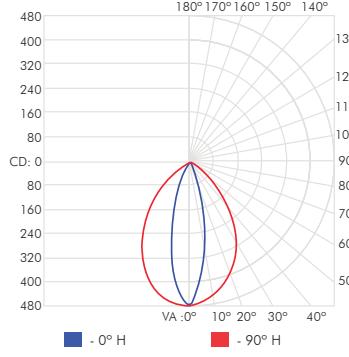


## HIGH OUTPUT


**HO Red**

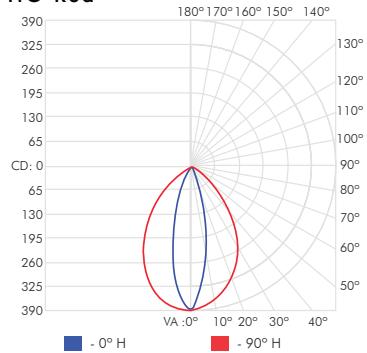


**HO Green**

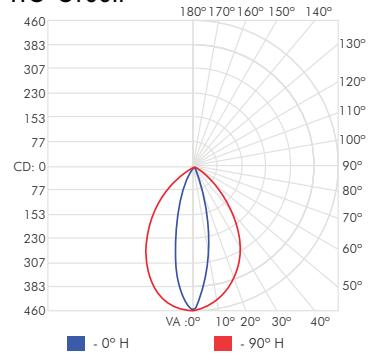


**HO Blue**

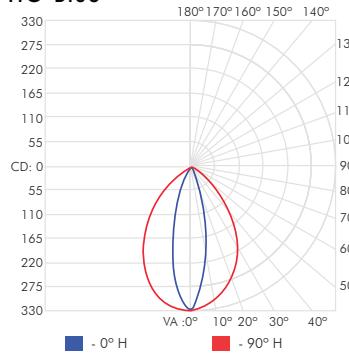


**HO Amber**

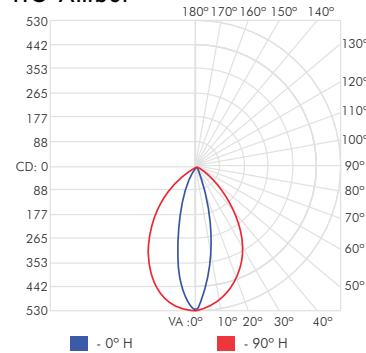


**HO Yellow**

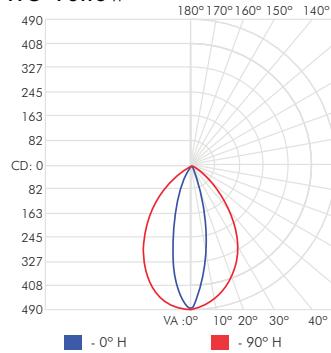


**HO Golden Yellow**

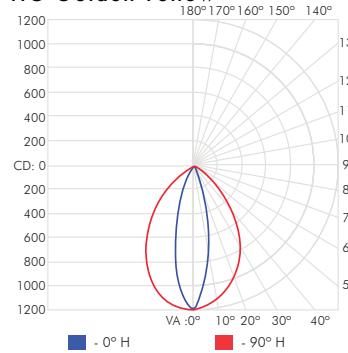


**HO Ice Blue**

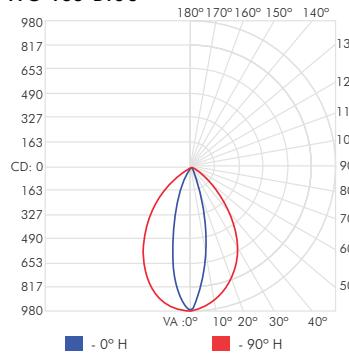


**HO Cyan**

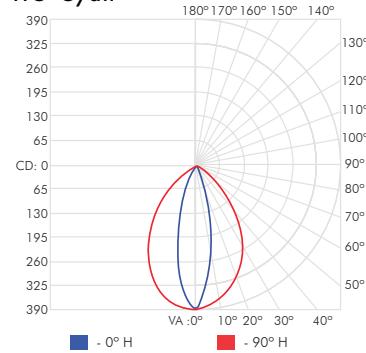


**HO Light Green**

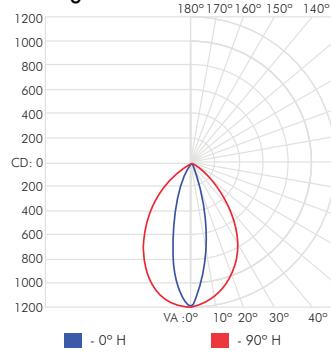


**HO Pink**

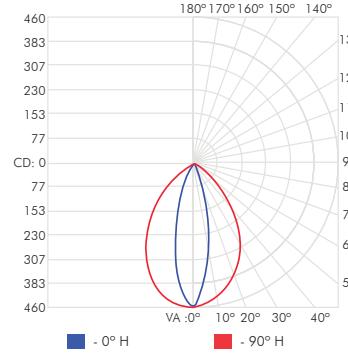


**HO Violet**

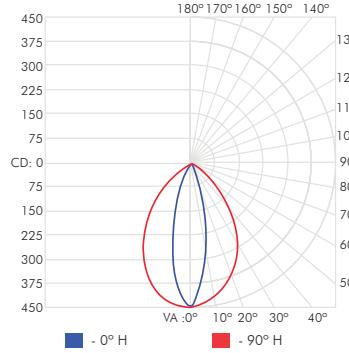


**HO Turquoise**

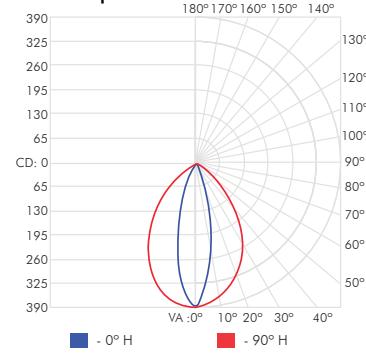


**HO Dark Blue**

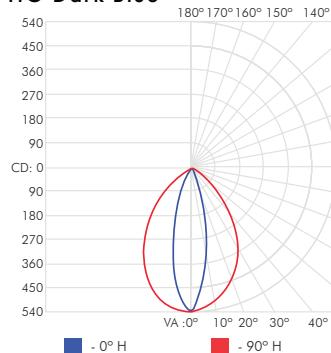

**HO Dark Orange**

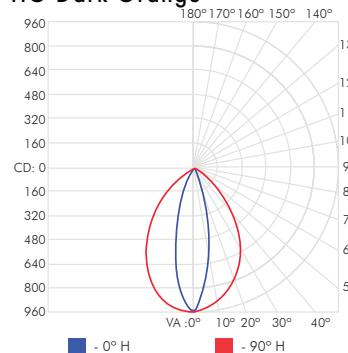


**HO Dark Red**

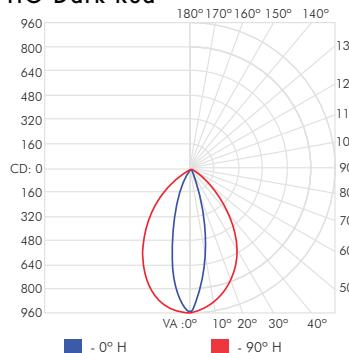


## STANDARD OUTPUT


### SO Red

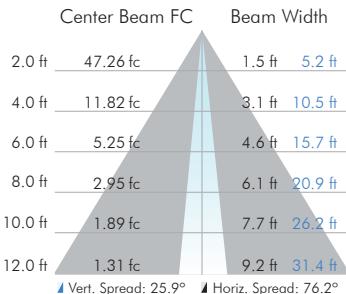


### SO Green

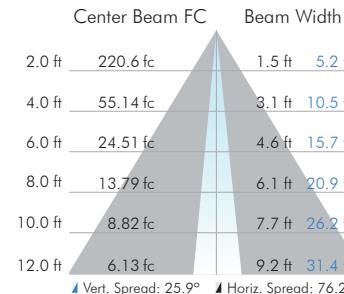


### SO Blue

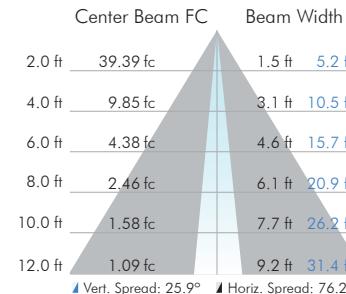


### SO Amber

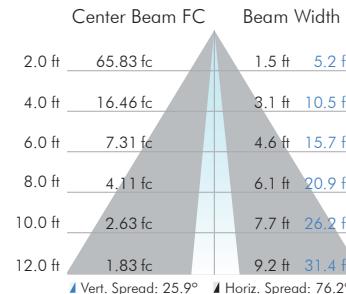


### SO Yellow

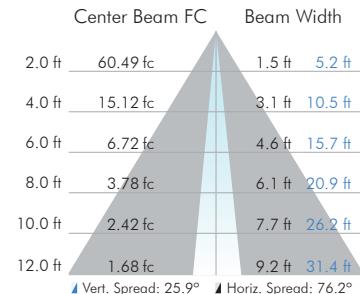


### SO Golden Yellow

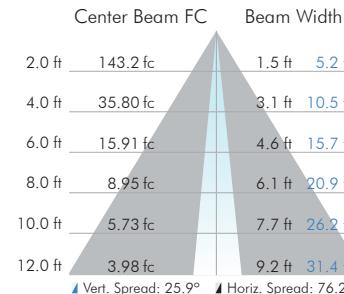


### SO Ice Blue

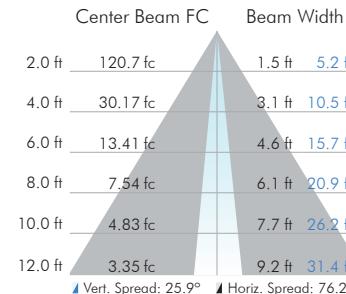


### SO Cyan

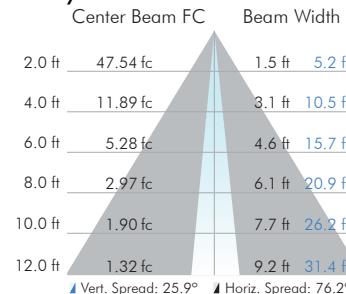


### SO Light Green

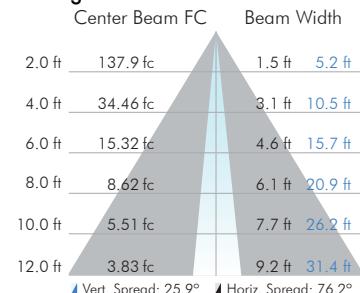


### SO Pink

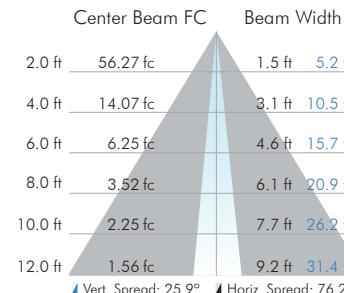


### SO Violet

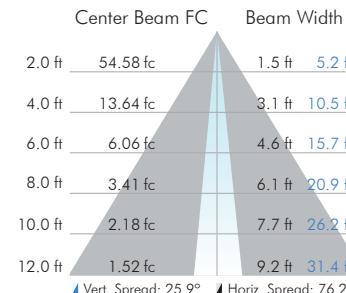


### SO Turquoise

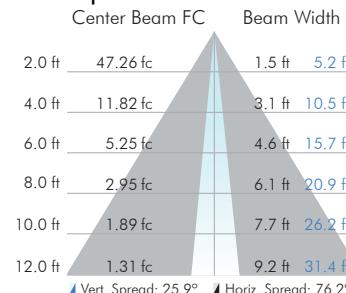


### SO Dark Blue

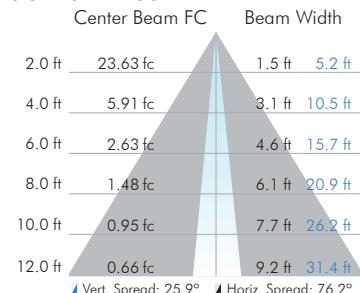

### SO Dark Orange

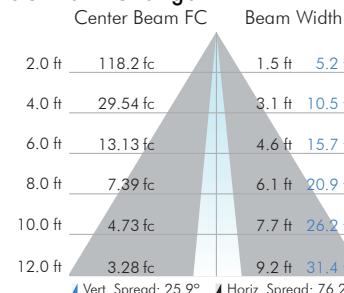


### SO Dark Red

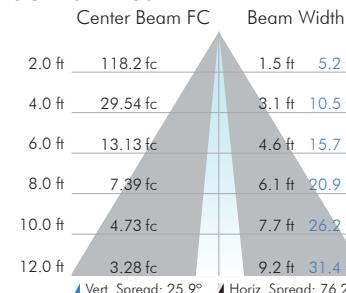


## HIGH OUTPUT


### HO Red

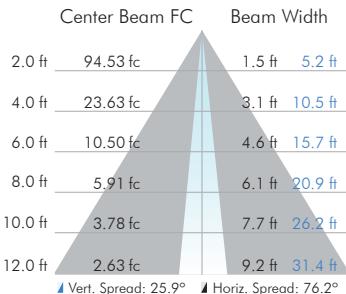


### HO Green

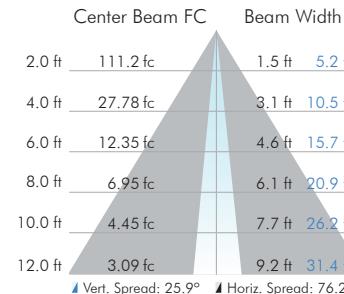


### HO Blue

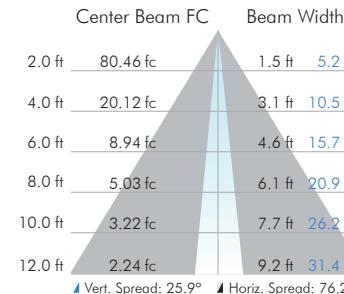


### HO Amber

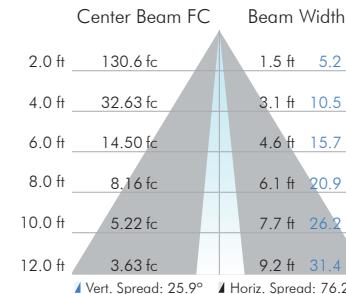


### HO Yellow

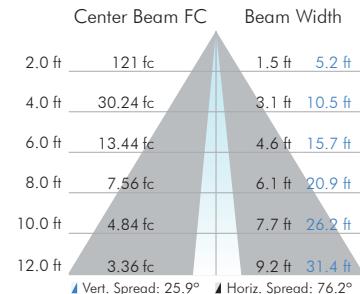


### HO Golden Yellow

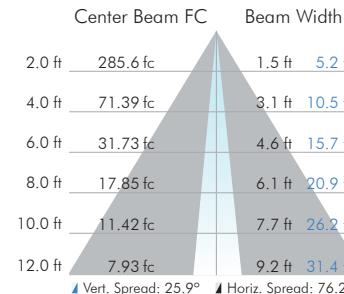


### HO Ice Blue

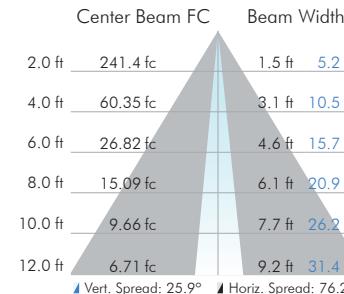


### HO Cyan

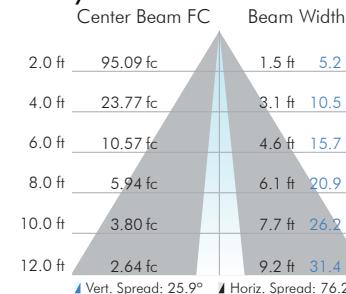


### HO Light Green

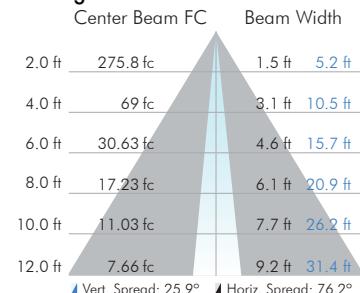


### HO Pink

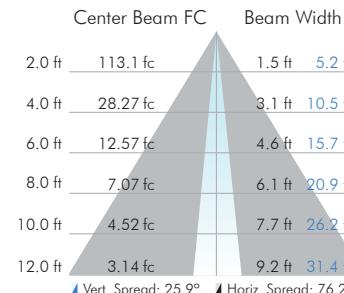


### HO Violet

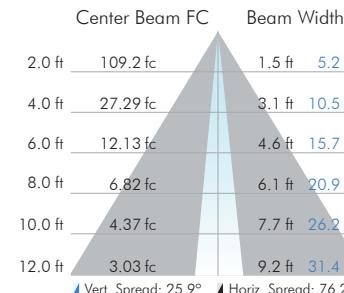


### HO Turquoise

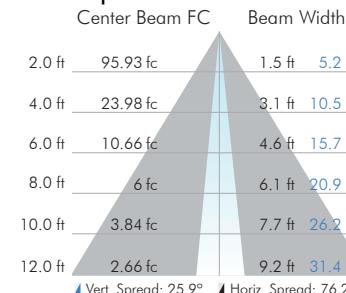


### HO Dark Blue

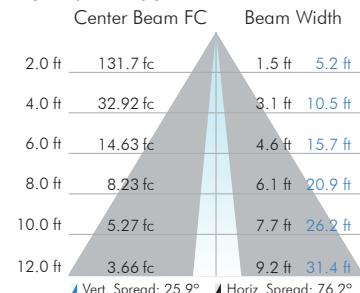


### HO Dark Orange

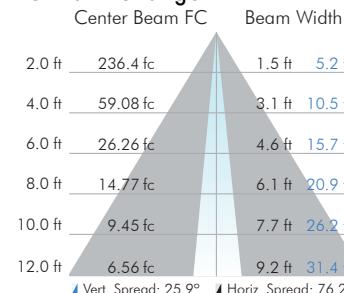

### HO Dark Red

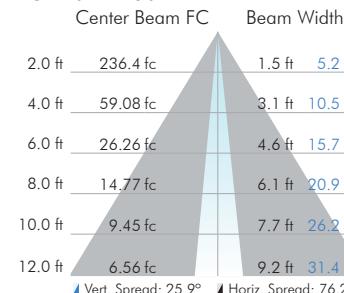

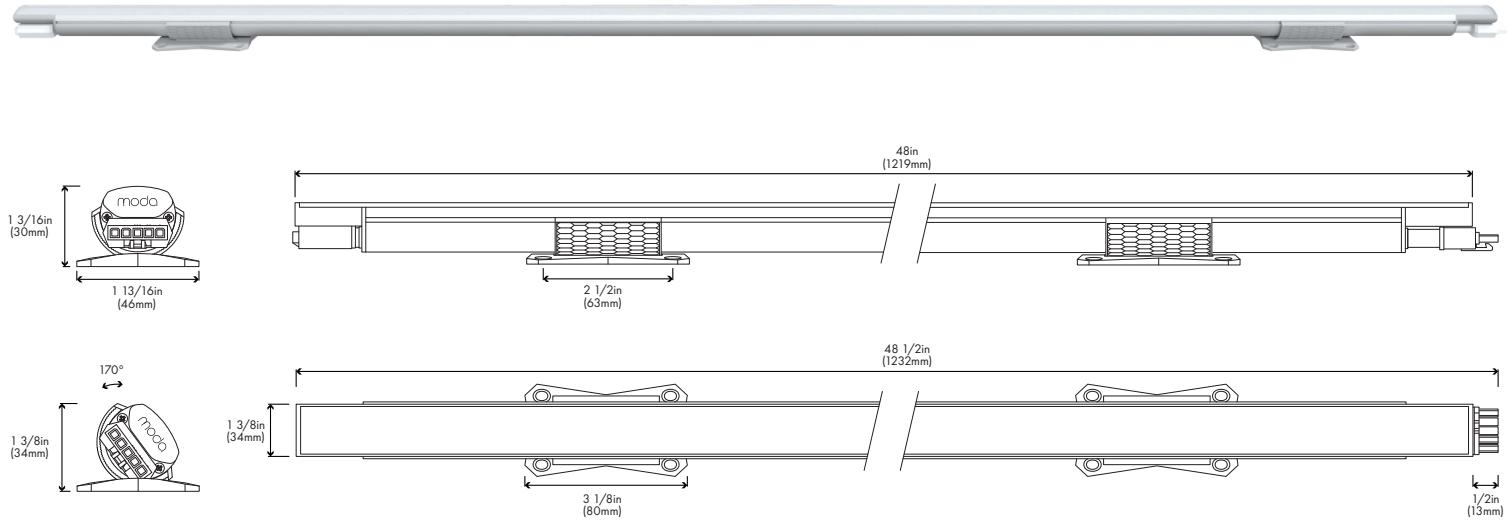

0-10V

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	672	38	35	34
Green	784	44	41	40
Blue	560	32	29	29
Amber	936	53	48	48
Yellow	860	49	45	44
Golden Yellow	2036	115	105	104
Ice Blue	1716	97	89	88
Cyan	676	38	35	35
Light Green	1960	111	102	101
Pink	800	45	41	41
Violet	776	44	40	40
Turquoise	672	38	35	34
Dark Blue	336	19	17	17
Dark Orange	1680	95	87	86
Dark Red	156	36	24	24

SO Power Consumption		SO Max Continuous Run*	
<b>120V</b>	19W	<b>120V AC</b>	120 ft
<b>240V</b>	20W	<b>240V AC</b>	240 ft
<b>277V</b>	20W	<b>277V AC</b>	210 ft


High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	1344	36	35	34
Green	1568	42	41	40
Blue	1120	30	29	29
Amber	1872	51	49	48
Yellow	1720	46	45	44
Golden Yellow	4072	110	107	104
Ice Blue	3432	93	90	88
Cyan	1352	37	36	35
Light Green	3920	106	103	101
Pink	1600	43	42	41
Violet	1552	42	41	40
Turquoise	1348	36	35	35
Dark Blue	672	51	49	48
Dark Orange	3360	91	88	86
Dark Red	312	72	48	48

HO Power Consumption		HO Max Continuous Run*	
<b>120V</b>	40W	<b>120V AC</b>	50 ft
<b>240V</b>	52W	<b>240V AC</b>	100 ft
<b>CE7714</b>	50W	<b>CE7714 AC</b>	100 ft


Each connection uses 0.1mA power for SO and 0.2mA for HO. Please check chosen dimmer for any mA restriction (i.e., 50mA restriction = maximum 500 connections for SO and 250 for HO).

## STANDARD OUTPUT


**SO Red**

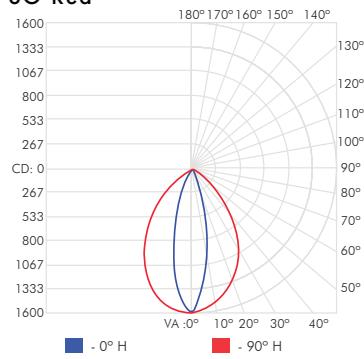


**SO Green**

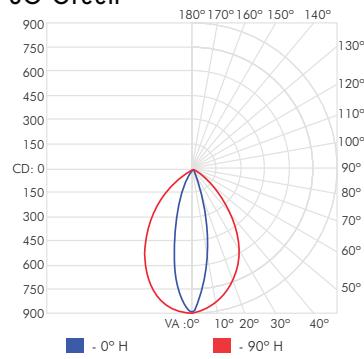


**SO Blue**

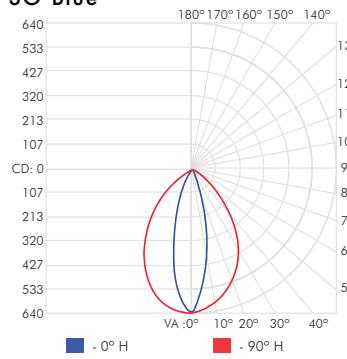


**SO Amber**

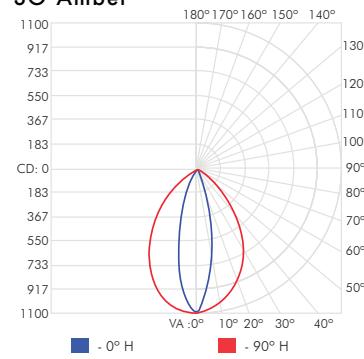


**SO Yellow**

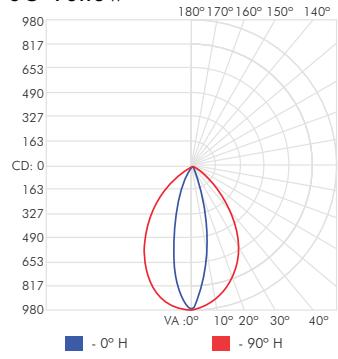


**SO Golden Yellow**

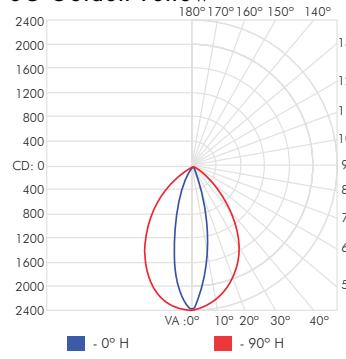


**SO Ice Blue**

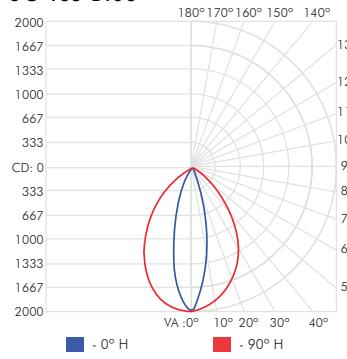


**SO Cyan**

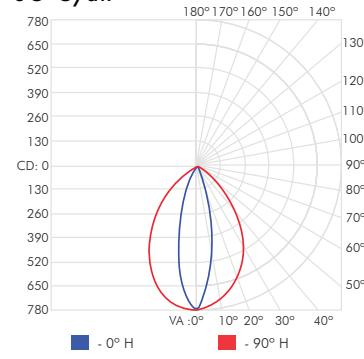


**SO Light Green**

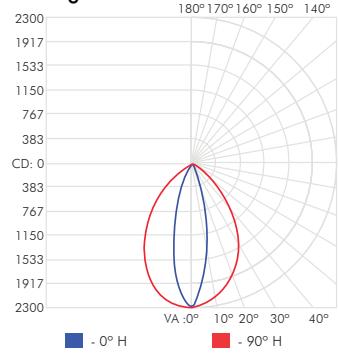


**SO Pink**

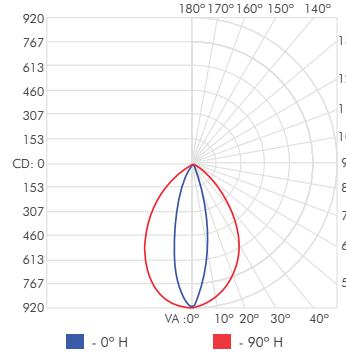


**SO Violet**

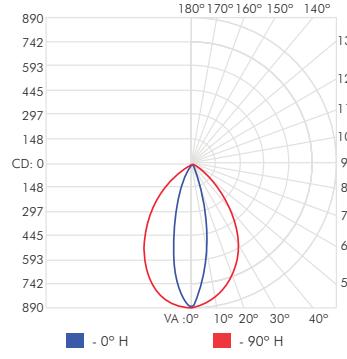


**SO Turquoise**

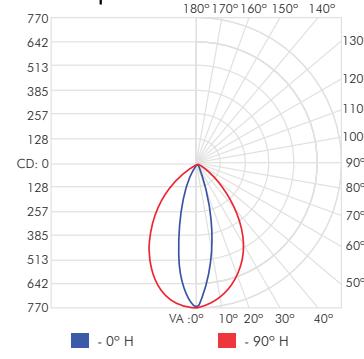


**SO Dark Blue**

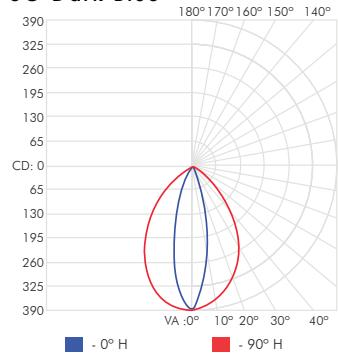

**SO Dark Orange**

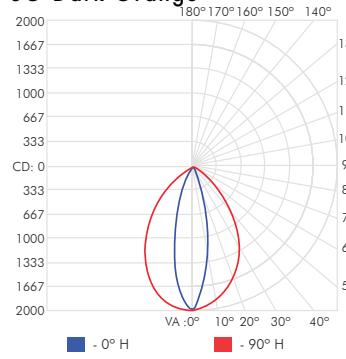


**SO Dark Red**

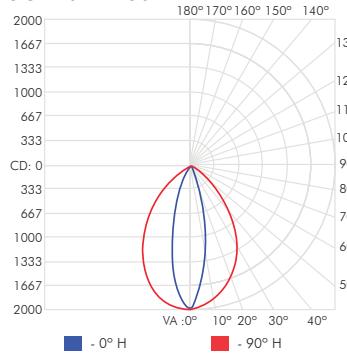


## HIGH OUTPUT


**HO Red**

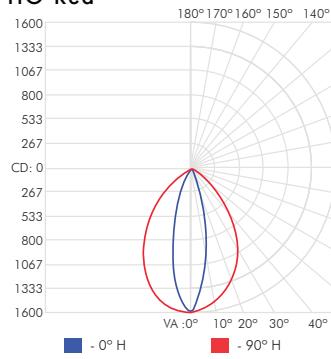


**HO Green**

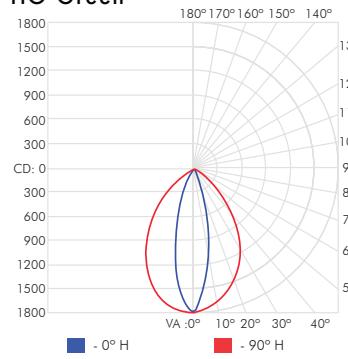


**HO Blue**

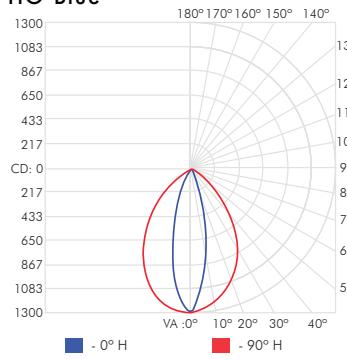


**HO Amber**

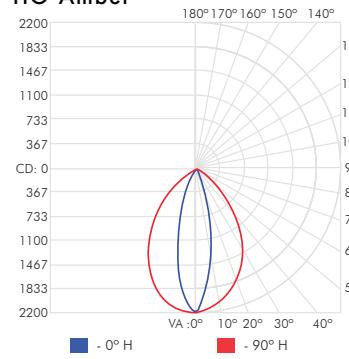


**HO Yellow**

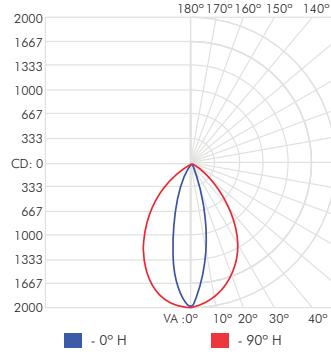


**HO Golden Yellow**

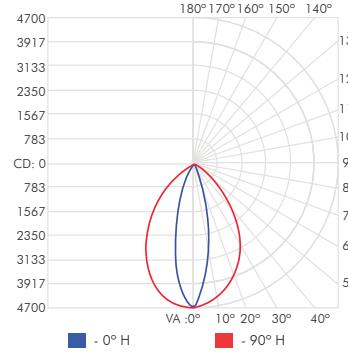


**HO Ice Blue**

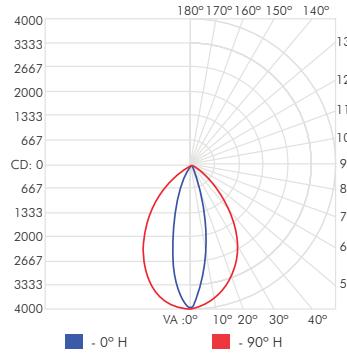


**HO Cyan**

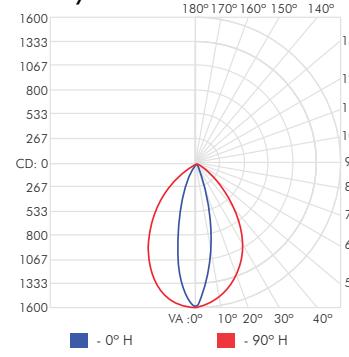


**HO Light Green**

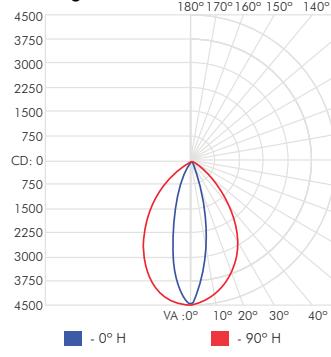


**HO Pink**

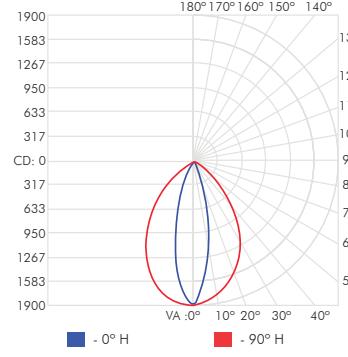


**HO Violet**

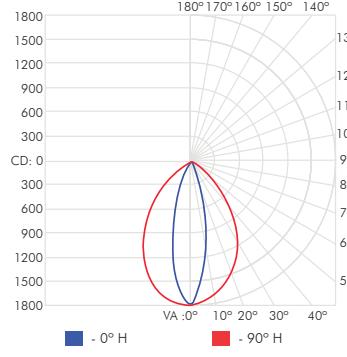


**HO Turquoise**

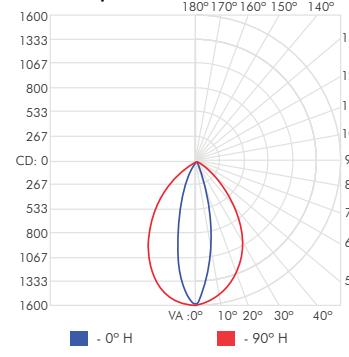


**HO Dark Blue**

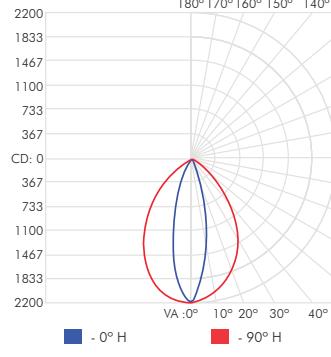

**HO Dark Orange**

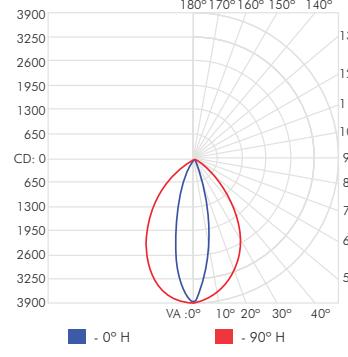


**HO Dark Red**

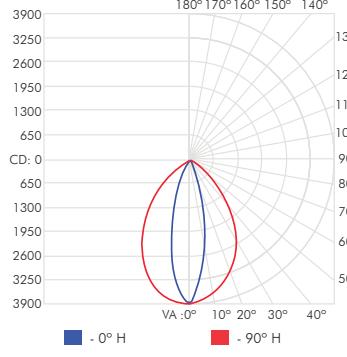


## STANDARD OUTPUT


### SO Red

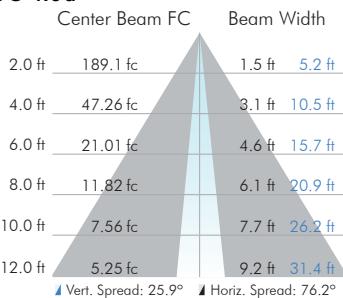


### SO Green

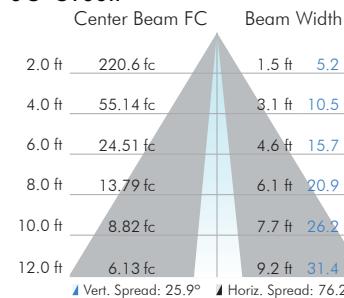


### SO Blue

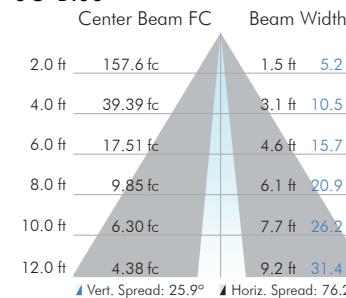


### SO Amber

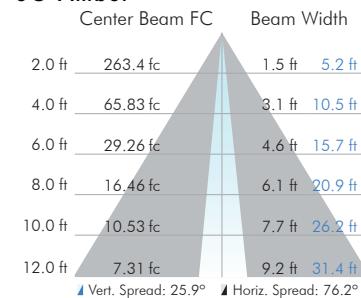


### SO Yellow

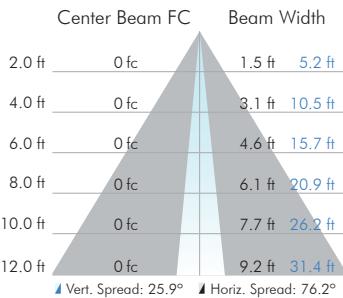


### SO Golden Yellow

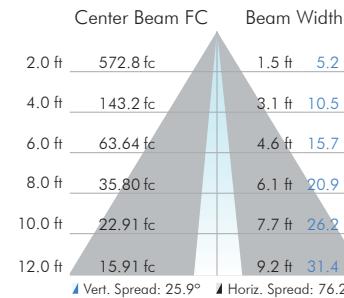


### SO Ice Blue

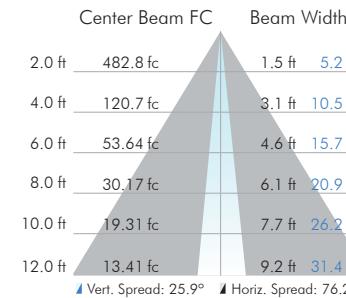


### SO Cyan

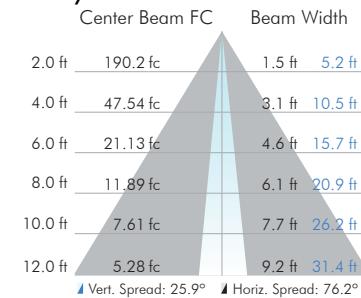


### SO Light Green

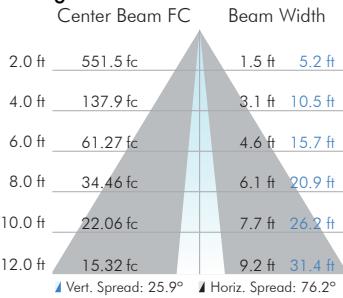


### SO Pink

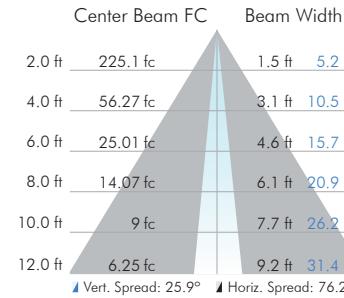


### SO Violet

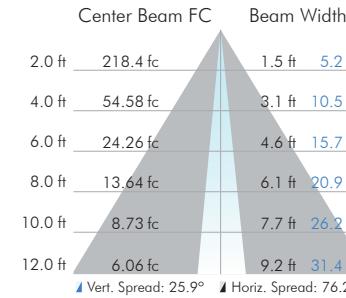


### SO Turquoise

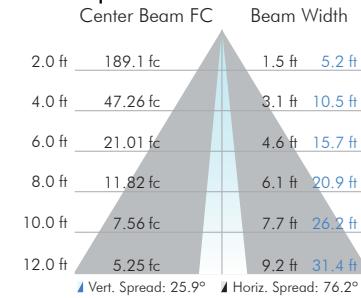


### SO Dark Blue

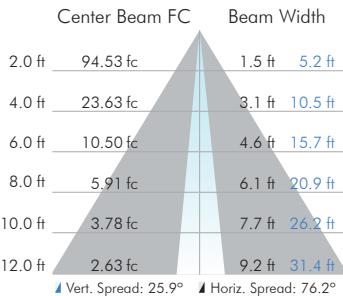

### SO Dark Orange

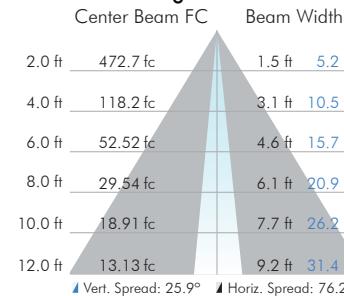


### SO Dark Red

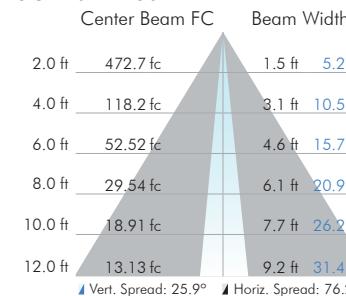


## HIGH OUTPUT


### HO Red

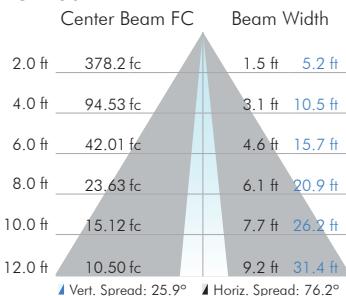


### HO Green

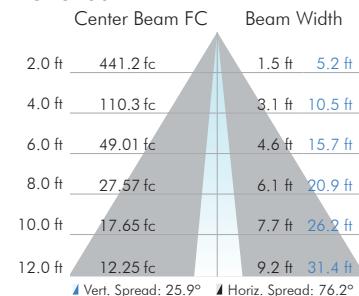


### HO Blue

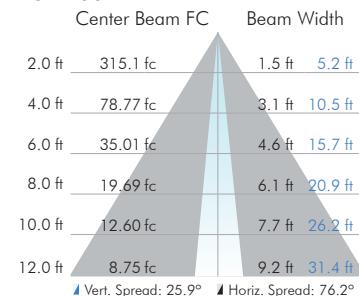


### HO Amber

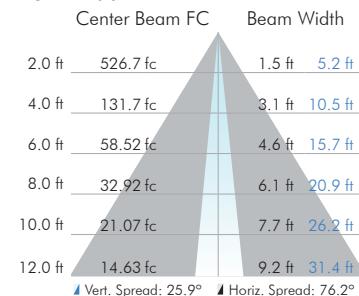


### HO Yellow

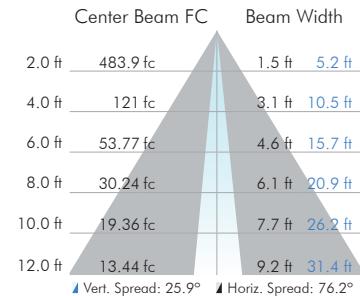


### HO Golden Yellow

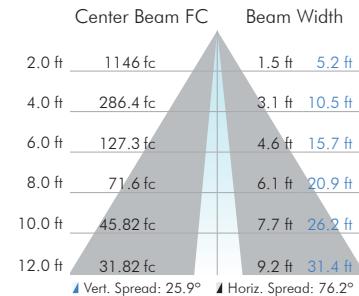


### HO Ice Blue

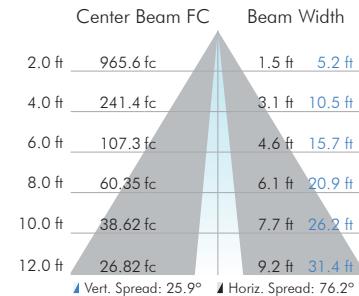


### HO Cyan

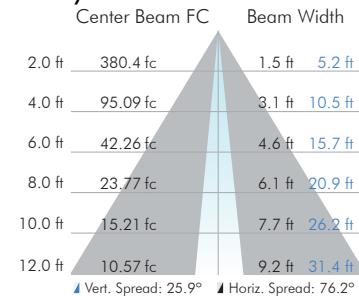


### HO Light Green

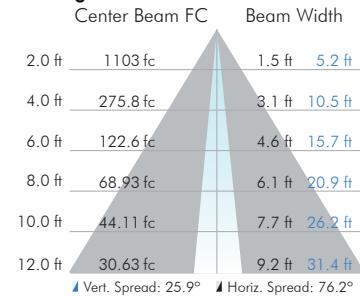


### HO Pink

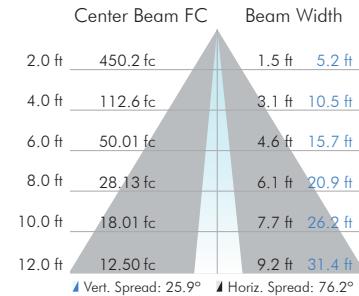


### HO Violet

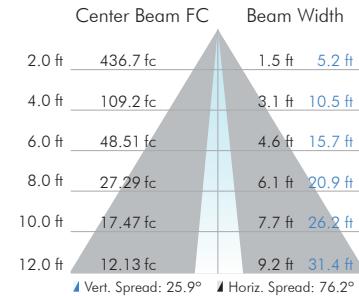


### HO Turquoise

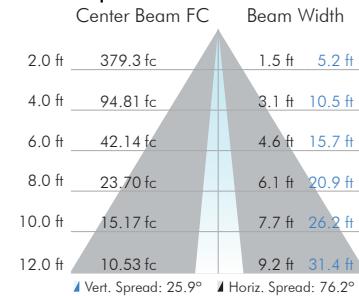


### HO Dark Blue

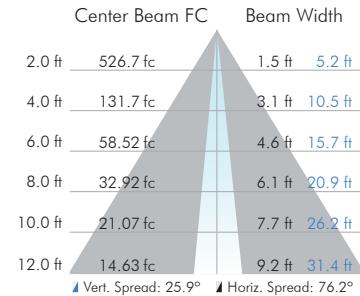


### HO Dark Orange

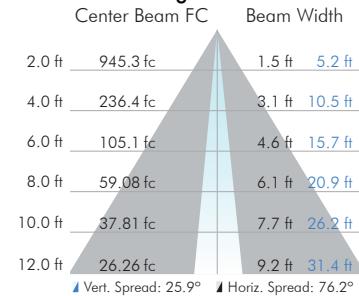


### HO Dark Red

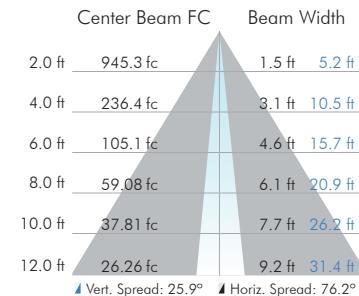


CIE 1931 Chromaticity Diagram

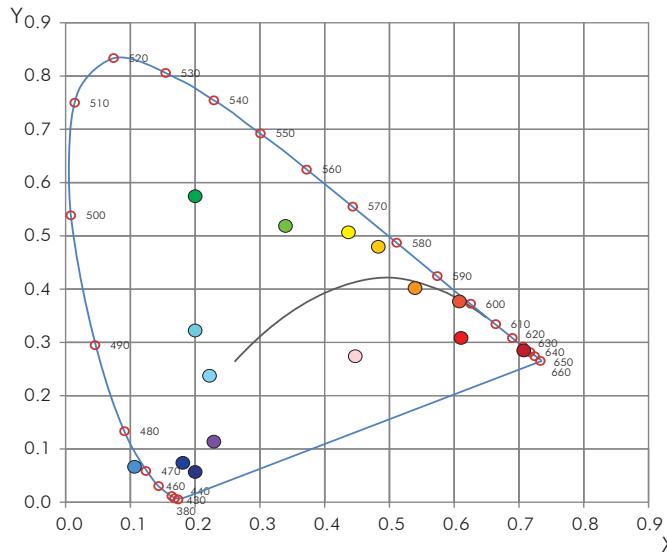

Color	Coordinate	Wavelength
Red	x: 0.6221 y: 0.3174 u: 0.4482 v: 0.5111	620nm
Green	x: 0.2075 y: 0.5883 u: 0.0835 v: 0.5445	520nm
Blue	x: 0.1804 y: 0.0715 u: 0.2158 v: 0.1834	445nm
Amber	x: 0.5415 y: 0.4189 u: 0.3145 v: 0.5412	611nm
Yellow	x: 0.4441 y: 0.5161 u: 0.2140 v: 0.5593	557nm
Golden Yellow	x: 0.4814 y: 0.4892 u: 0.2438 v: 0.5568	583nm
Ice Blue	x: 0.2317 y: 0.2495 u: 0.1676 v: 0.4059	446nm
Cyan	x: 0.1158 y: 0.0735 u: 0.3234 v: 0.5522	473nm
Light Green	x: 0.3458 y: 0.5241 u: 0.1611 v: 0.5487	534nm
Pink	x: 0.4547 y: 0.2832 u: 0.3342 v: 0.4649	621nm
Violet	x: 0.2337 y: 0.1275 u: 0.2301 v: 0.2823	448nm
Turquoise	x: 0.2047 y: 0.3361 u: 0.1852 v: 0.5652	485nm
Dark Blue	x: 0.1542 y: 0.0259 u: 0.2055 v: 0.0776	443nm
Dark Orange	x: 0.6130 y: 0.3791 u: 0.3878 v: 0.5396	622nm
Dark Red	x: 0.7117 y: 0.2759 u: 0.5825 v: 0.5080	672nm

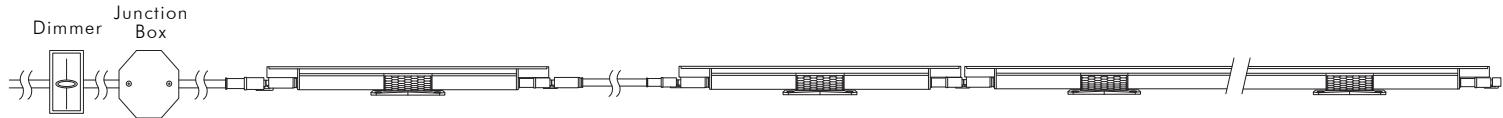

#### UL / cUL Dimming

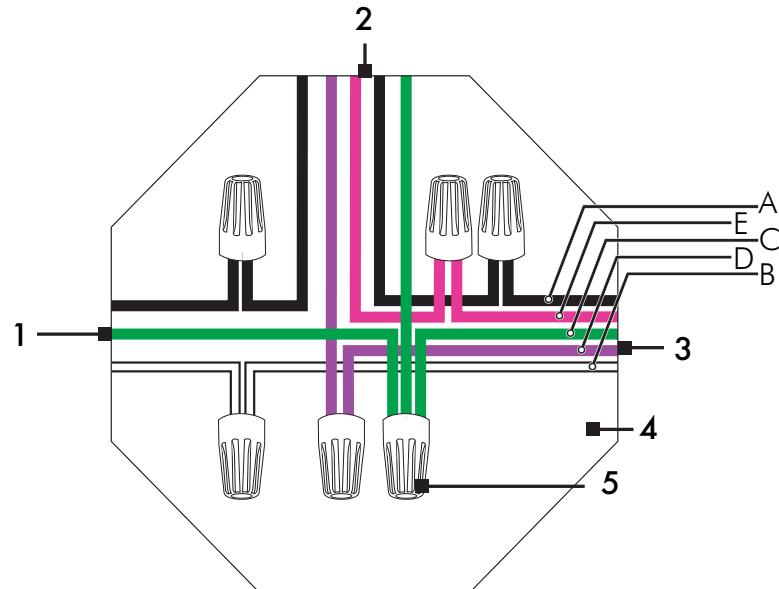

#### Wiring Legend

- |   |                    |
|---|--------------------|
| 1 | Power 100-277V AC  |
| 2 | 0-10V Dimmer       |
| 3 | 5 Pin Leader Cable |
| 4 | Junction Box       |
| 5 | Wiring Nuts        |

#### 5 Pin Leader Cable

##### UL/cUL      CE/CCC\*


A	Live 100-277V AC	— Black	— Brown
B	Neutral	— White	— Blue
C	Ground	— Green	— Green/Yellow
D	Data Positive	— Purple	— Black
E	Data Negative	— Pink*	— Pink*

\*Not illustrated


\*Leader wire Data Negative wires may still be gray in color as some stock remains in the system during the change over.

#### 0-10V Connectors


##### Male Output

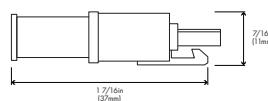

##### Angle Adjustment

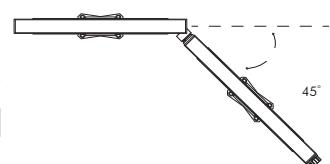


##### Female Output




#### Compatible Dimmers

Please visit our website for a list of compatible dimmers.

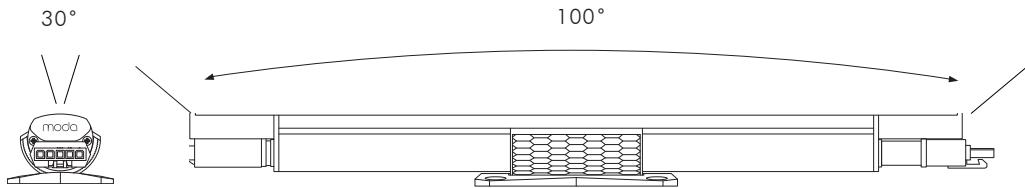

#### Wallwash Optic.

Wall wash any indoor application with its integral linear optic of 30° x 100° for a precise beam pattern with no color over angle, no striations and no dark spots up to 20ft (6m).

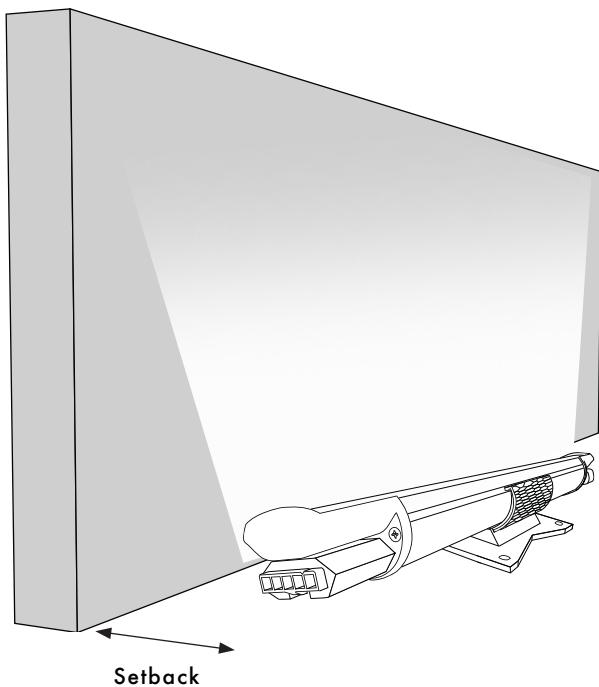


#### Setback Chart

10ft Wall

1 ft

**Recommended Setback from wall is 1/8 of wall height.**

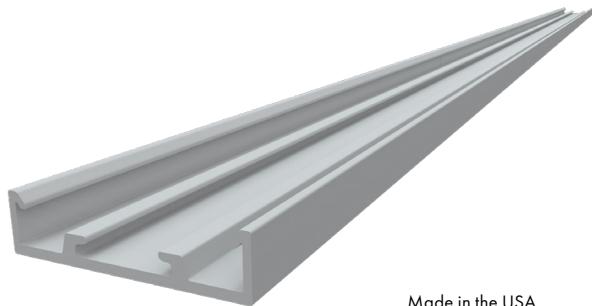

Made in the USA

## MODA MINI COVE MOUNTING TRACK

### MOUNTING MINI COVE

Allows users to install Moda Mini Cove fixtures in a continuous linear position. Moda Mini Cove Mounting Tracks come packaged in 5 pieces of 4ft sections to create a continuous run of 20ft.

Made in the USA.

### Options

Finish G - Gray

Length 4ft - 4ft Sections

Quantity 5 Pieces (20ft)

### Physical

Applications Cove, Accent

Construction ABS Plastic



## MODA MINI COVE TRACK CONNECTOR

Joins two pieces of track together.

### Accepts screw sizes







Drywall	#6	#8
---------	----	----

Self tapping	#6	#8
--------------	----	----

Concrete Anchor	3/16in
-----------------	--------

(By others)

## ACCESSORIES: MOUNTING TRACK

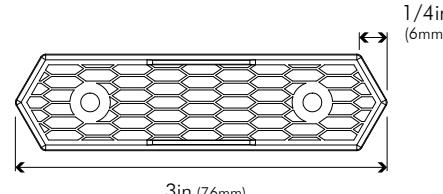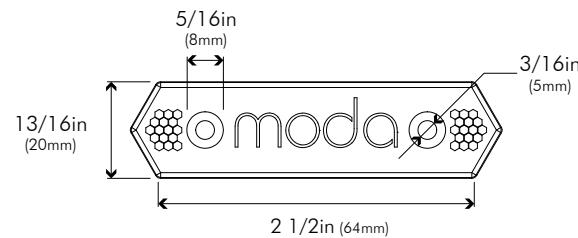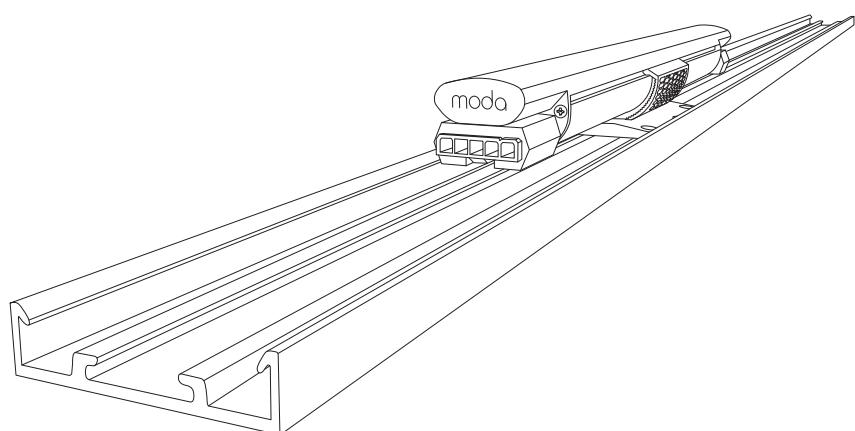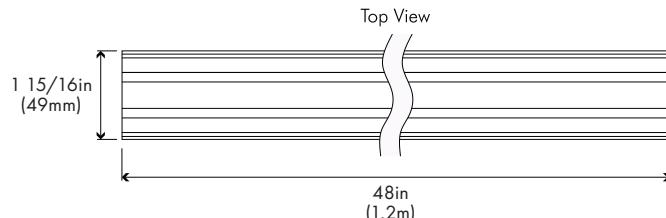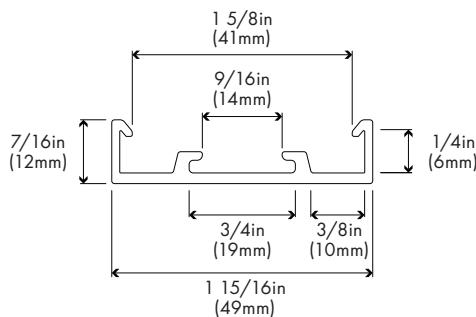



### MODA MINI COVE LOUVERS ASYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louver sections for a 4ft fixture.

#### Features



- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected


#### Options

Finish	B - BLACK W - WHITE
Length	1FT

#### Physical

Applications	Cove, Accent, Graze
Construction	ABS

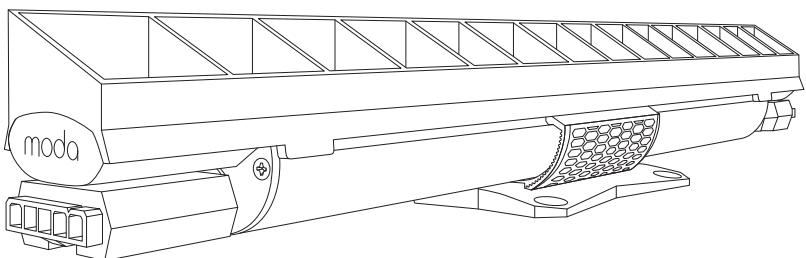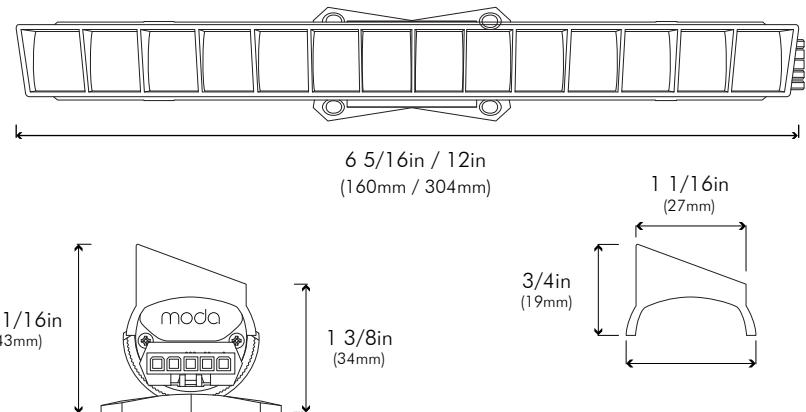

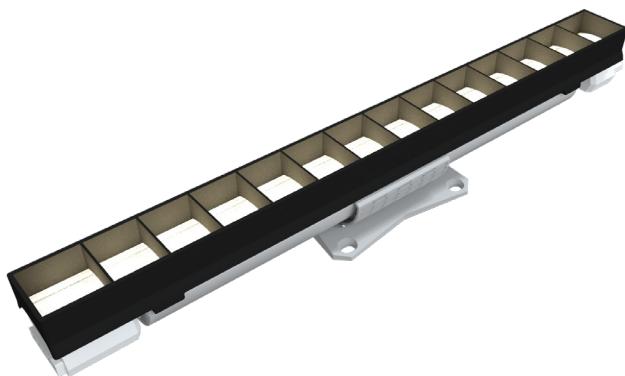

## MODA MINI COVE LOUVERS SYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

### Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected



### Options

Finish	B - BLACK W - WHITE
Length	1FT

### Physical

Applications	Cove, Accent, Graze
Construction	ABS

## ACCESSORIES: LOUVERS SYMMETRIC

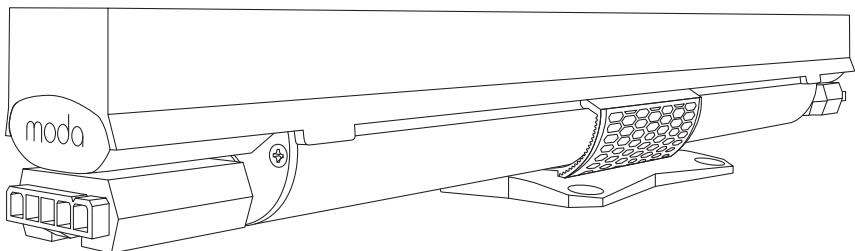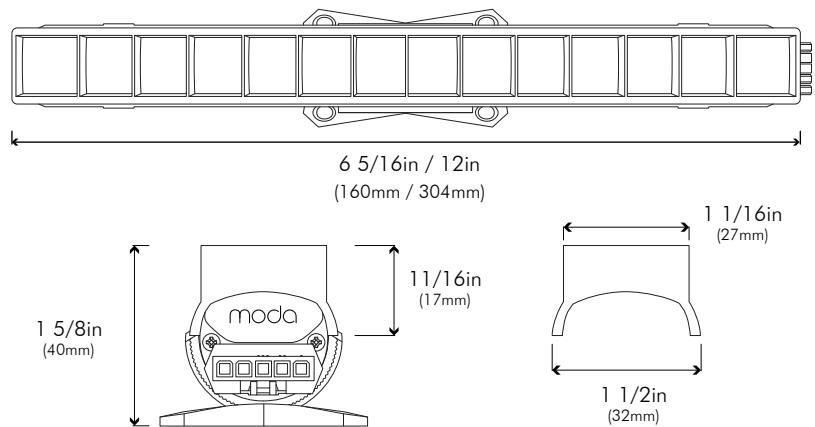



### MODA MINI COVE LOUVERS HONEYCOMB

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

#### Features



- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

#### Options

Finish	B - BLACK W - WHITE
Length	1FT

#### Physical

Applications	Cove, Accent, Graze
Construction	ABS

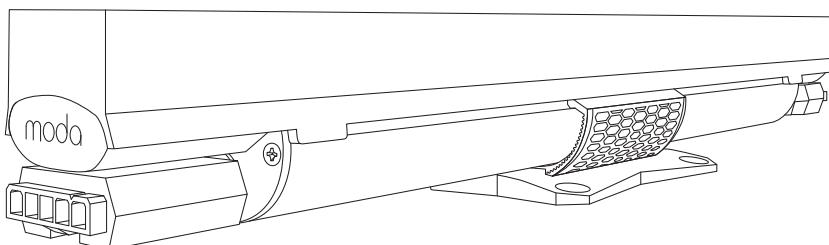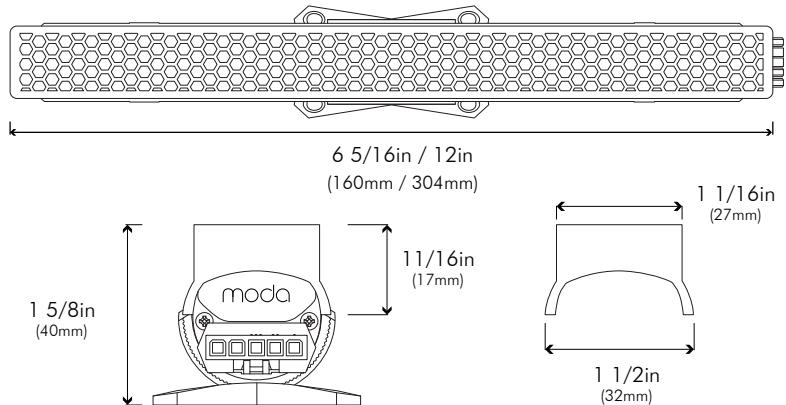



## MODA MINI COVE LOUVERS BLADE

Add visual interest to any space by creating a narrow line of light, which can be seen in semi direct view or reflected off the wall or ceiling when integrated into a cove or niche. Use four 1ft louvers for a 4ft fixture.

### Features



- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

### Options

Finish	B - BLACK
Length	1FT

### Physical


Applications	Cove, Accent, Graze
Construction	ABS

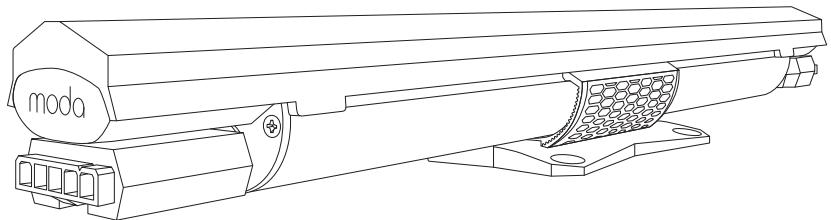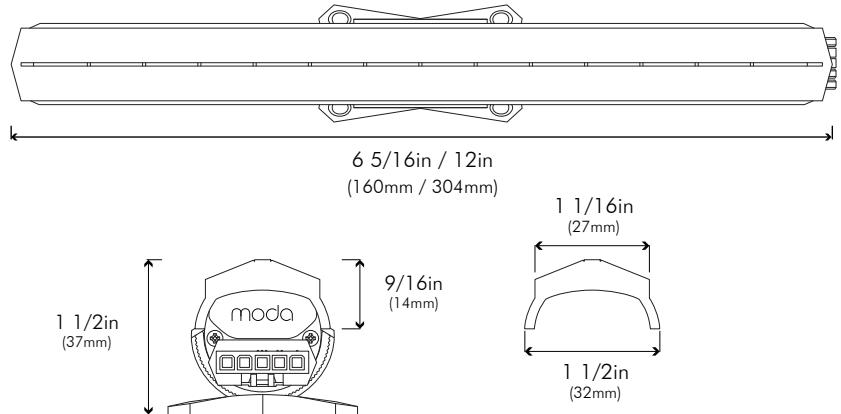


## DMX LEADER CABLES

### Moda Mini Cove Interior 5 Pin Leader Cables

	UL/cUL	EU/CCC
Lengths	10ft and 25ft	3m and 10m
Color	White	White

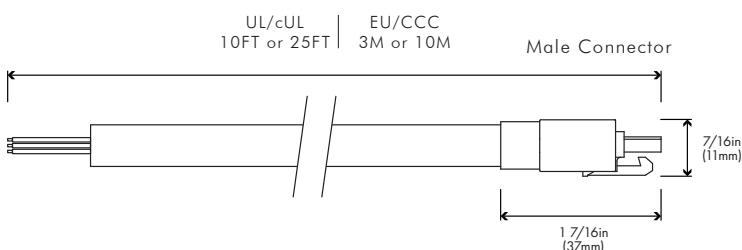

Male Connector

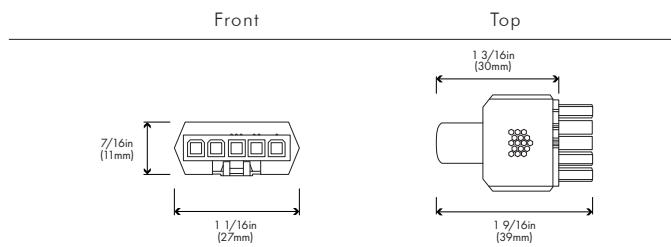


### DMX JUMPER CABLES


	UL/cUL	EU/CCC	Male Connector
Female Connector	10FT or 25FT	3M or 10M	

Female Connector length: 1 11/16in (42mm). Male Connector length: 1 7/16in (37mm). Total cable length: 7/16in (11mm).

Connectors

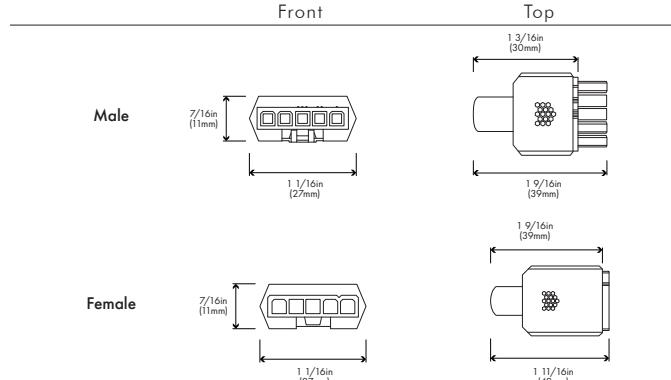


### Pin Assignment




	UL/cUL	EU/CCC	
1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/Yellow
4	Data Positive	Purple	Black
5	Data Negative	Pink	Pink

### Pin Assignment



	UL/cUL	EU/CCC	
1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/Yellow
4	Data Positive	Purple	Black
5	Data Negative	Pink	Pink



	UL/cUL	EU/CCC	
1	Data Negative	Pink	Pink
2	Data Positive	Purple	Black
3	Ground	Green	Green/Yellow
4	Neutral	White	Blue
5	Live 100-277V	Black	Brown

Fixture	Part Number	Ordering SKU
0-10V SO 1FT	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Red 1FT 30X100	MMGI-S-S-0-R-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Green 1FT 30X100	MMGI-S-S-0-G-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Blue 1FT 30X100	MMGI-S-S-0-B-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Amber 1FT 30X100	MMGI-S-S-0-A-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Yellow 1FT 30X100	MMGI-S-S-0-Y-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Pink 1FT 30X100	MMGI-S-S-0-P-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Cyan 1FT 30X100	MMGI-S-S-0-C-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Violet 1FT 30X100	MMGI-S-S-0-V-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Turquoise 1FT 30X100	MMGI-S-S-0-TQ-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Ice Blue 1FT 30X100	MMGI-S-S-0-IB-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Light Green 1FT 30X100	MMGI-S-S-0-LG-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Golden Yellow 1FT 30X100	MMGI-S-S-0-GY-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Blue 1FT 30X100	MMGI-S-S-0-DB-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Orange 1FT 30X100	MMGI-S-S-0-DO-1-310
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Red 1FT 30X100	MMGI-S-S-0-DR-1-310
0-10V HO 1FT	Moda Mini Graze Interior High Output Silver 0-10V Dimming Red 1FT 30X100	MMGI-H-S-0-R-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Green 1FT 30X100	MMGI-H-S-0-G-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Blue 1FT 30X100	MMGI-H-S-0-B-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Amber 1FT 30X100	MMGI-H-S-0-A-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Yellow 1FT 30X100	MMGI-H-S-0-Y-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Pink 1FT 30X100	MMGI-H-S-0-P-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Cyan 1FT 30X100	MMGI-H-S-0-C-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Violet 1FT 30X100	MMGI-H-S-0-V-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Turquoise 1FT 30X100	MMGI-H-S-0-TQ-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Ice Blue 1FT 30X100	MMGI-H-S-0-IB-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Light Green 1FT 30X100	MMGI-H-S-0-LG-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Golden Yellow 1FT 30X100	MMGI-H-S-0-GY-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Blue 1FT 30X100	MMGI-H-S-0-DB-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Orange 1FT 30X100	MMGI-H-S-0-DO-1-310
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Red 1FT 30X100	MMGI-H-S-0-DR-1-310

Fixture	Part Number	Ordering SKU
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Red 4FT 30X100	MMGI-S-S-0-R-4-310	136-3000
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Green 4FT 30X100	MMGI-S-S-0-G-4-310	136-3001
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Blue 4FT 30X100	MMGI-S-S-0-B-4-310	136-3002
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Amber 4FT 30X100	MMGI-S-S-0-A-4-310	136-3003
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Yellow 4FT 30X100	MMGI-S-S-0-Y-4-310	136-3004
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Pink 4FT 30X100	MMGI-S-S-0-P-4-310	136-3005
<b>0-10V</b> Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Cyan 4FT 30X100	MMGI-S-S-0-C-4-310	136-3006
<b>SO</b> Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Violet 4FT 30X100	MMGI-S-S-0-V-4-310	136-3007
<b>4FT</b> Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Turquoise 4FT 30X100	MMGI-S-S-0-TQ-4-310	136-3008
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Ice Blue 4FT 30X100	MMGI-S-S-0-IB-4-310	136-3009
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Light Green 4FT 30X100	MMGI-S-S-0-LG-4-310	136-3010
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Golden Yellow 4FT 30X100	MMGI-S-S-0-GY-4-310	136-3011
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Blue 4FT 30X100	MMGI-S-S-0-DB-4-310	136-3012
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Orange 4FT 30X100	MMGI-S-S-0-DO-4-310	136-3013
Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Red 4FT 30X100	MMGI-S-S-0-DR-4-310	136-3014
Moda Mini Graze Interior High Output Silver 0-10V Dimming Red 4FT 30X100	MMGI-H-S-0-R-4-310	136-3200
Moda Mini Graze Interior High Output Silver 0-10V Dimming Green 4FT 30X100	MMGI-H-S-0-G-4-310	136-3201
Moda Mini Graze Interior High Output Silver 0-10V Dimming Blue 4FT 30X100	MMGI-H-S-0-B-4-310	136-3202
Moda Mini Graze Interior High Output Silver 0-10V Dimming Amber 4FT 30X100	MMGI-H-S-0-A-4-310	136-3203
Moda Mini Graze Interior High Output Silver 0-10V Dimming Yellow 4FT 30X100	MMGI-H-S-0-Y-4-310	136-3204
Moda Mini Graze Interior High Output Silver 0-10V Dimming Pink 4FT 30X100	MMGI-H-S-0-P-4-310	136-3205
<b>0-10V</b> Moda Mini Graze Interior High Output Silver 0-10V Dimming Cyan 4FT 30X100	MMGI-H-S-0-C-4-310	136-3206
<b>HO</b> Moda Mini Graze Interior High Output Silver 0-10V Dimming Violet 4FT 30X100	MMGI-H-S-0-V-4-310	136-3207
<b>4FT</b> Moda Mini Graze Interior High Output Silver 0-10V Dimming Turquoise 4FT 30X100	MMGI-H-S-0-TQ-4-310	136-3208
Moda Mini Graze Interior High Output Silver 0-10V Dimming Ice Blue 4FT 30X100	MMGI-H-S-0-IB-4-310	136-3209
Moda Mini Graze Interior High Output Silver 0-10V Dimming Light Green 4FT 30X100	MMGI-H-S-0-LG-4-310	136-3210
Moda Mini Graze Interior High Output Silver 0-10V Dimming Golden Yellow 4FT 30X100	MMGI-H-S-0-GY-4-310	136-3211
Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Blue 4FT 30X100	MMGI-H-S-0-DB-4-310	136-3212
Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Orange 4FT 30X100	MMGI-H-S-0-DO-4-310	136-3213
Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Red 4FT 30X100	MMGI-H-S-0-DR-4-310	136-3214

ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Leader Cable US 5 Pin 10FT	Power to first fixture of run	MLCI-US-5PIN-W-10FT	299-0100
Leader Cable US 5 Pin 25FT	Power to first fixture of run	MLCI-US-5PIN-W-25FT	299-0102
Jumper Cable US 5 Pin 1FT	Connection between fixtures	MJCI-US-5PIN-W-1FT	299-1100
Jumper Cable US 5 Pin 4FT	Connection between fixtures	MJCI-US-5PIN-W-4FT	299-1102
Leader Cable EU 5 Pin 3M	Power to first fixture of run	MLCI-EU-5PIN-W-3M	299-0101
Leader Cable EU 5 Pin 10M	Power to first fixture of run	MLCI-EU-5PIN-W-10M	299-0103
Jumper Cable EU 5 Pin 300MM	Connection between fixtures	MJCI-EU-5PIN-W-300MM	299-1101
Jumper Cable EU 5 Pin 1M	Connection between fixtures	MJCI-EU-5PIN-W-1M	299-1103
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W	299-2100
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G	299-3200
Mounting Track Connector	Interior track connector	N/A	299-3202
Fixture Quick Release Tool	Enables quick fixture removal from Mounting Track	N/A	299-3203
Symmetric Louver 1FT - Black	Symmetric louver for light control	N/A	299-4230
Symmetric Louver 1FT - White	Symmetric louver for light control	N/A	299-4330
Asymmetric Louver 1FT - Black	Asymmetric louver for light control	N/A	299-4231
Asymmetric Louver 1FT - White	Asymmetric louver for light control	N/A	299-4331
Honeycomb Louver 1FT - Black	Honeycomb louver for light control	N/A	299-4232
Honeycomb Louver 1FT - White	Honeycomb louver for light control	N/A	299-4332
Blade Louver 1FT - Black	Blade louver for light control	N/A	299-4233