

Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

SKU: _____ Type: _____ PO #: _____ Quantity: _____

Notes: _____



Miniature Line Voltage Cove Color Fixture.

MODA MINI COVE COLOR INTERIOR is an award winning, patented, miniature line voltage cove lighting system. Now available in mono static colors, these unique colors can enhance any environment. For projects which require a unique static color the only way to achieve this is by mixing red, green and blue colors with DMX512 controls, DMX512 enabled fixtures, DMX wiring and time to program the specific color required. All of this has a cost. This is now eliminated by choosing MODA MINI Cove Color. No longer do you have to worry about the red die degrading faster than green and blue dies, hence having a shift over time with the specific color the designer has chosen. Enjoy worry free simple color specific fixtures. Easy 3 wire connections for on/off or ELV dimming control, or standard 5 wire for 0-10V installations. This drastically reduces installation time and cost. Choose from Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Dark Blue, Dark Orange, Dark Red or Turquoise. If a project requires a custom color we are able to create that color in our laboratory with our own ability to mix proprietary MODA Phosphor to create virtually any color required.

Unlike other fixtures which are much larger in physical size, MINI COVE utilizes the latest Advanced MODA Design and Electronic Engineering, ensuring fixtures are cool to the touch. This is achieved by designing a forward thinking fixture with intelligent driver technology and by under driving the most advanced LEDs in the world, creating a fixture which is so cool it can be held after days of illumination. The L70 (longevity) of the fixture is extended and phosphor degradation is kept to a minimum.

The Onboard American Dimming Chipset, programmed by our MODA Software Division with new Advanced Firmware enables MINI COVE to deliver smooth, no noise, flicker-free and synchronized dimming down to 0% with ELV or 0-10V Dimmers. Choose from either ELV or 0-10V direct dimming fixtures. Unlike other fixtures in the marketplace there is no need to purchase additional adapters, converters, dimming boxes or control modules, just use conventional wiring direct from the dimmer to create a powerful lighting system, saving time and money. Link any combination of 1ft and 4ft fixtures and every fixture will dim together smoothly, synchronized from 100% to 0%. With no minimum run lengths, just one 1ft fixture will dim seamlessly to 0%.

With MINI COVE, the installer is able to achieve long, single runs of up to 240 feet decreasing the number of wiring circuits required in an installation. Another step forward in this category of small sized fixtures is the universal power input. We designed a small MODA Micro Driver specific for MINI COVE enabling it to accept 100-277V AC 50/60 Hz, decreasing the number of SKUs needed to be held by any of our worldwide distributors and giving the installer a choice of power inputs from one fixture.

A specialized curved polymer optical lens combined with a cleverly designed Light Chamber delivers a light bending, smooth 200 degree beam pattern perfect for cove installations with no color over angle, no striations, inter-locking fields of light, and no dark spots.

The fixture incorporates an integral, patented, tool less self-locking bracket which slides into any position and turns 170 degrees. Built-in male & female connectors with thumb latch connections for fast installation time. Lightweight aluminum construction for durability and excellent thermal characteristics. Quality American made electronic components. Available in a tiny 6in size (15cm) for tight turning coves and to finish a small space on the end of a run. 1ft and 4ft lengths are for fast installation saving expensive labor installation costs and achieving long runs of quality illumination in rapid time.

Tested by Intertek to UL1598 for use in USA & Canada. CE Approved. WEE. RoHS Compliant. TM-30-15 Tested. US Patent No. D787,112 and D783,890.

Product Innovation Award (PIA) Winner 2016 for Best Luminaire. LFI Innovation Award 2017 Finalist for Dynamic Color, Theatrical, Cove, Strips and Tape. Lux Award Commended for Interior Product of the Year 2016. Darc Awards Finalist for Best Architectural Lighting Product - Interior Luminaires 2016. International Design Excellence Award for Innovative Product Design Finalist 2016.

Designed & Developed by MODA LIGHT in Las Vegas, USA.

PAGE

3	FEATURES
4	1 FOOT
5	1 FOOT SO POLAR CANDELAS
6	1 FOOT HO POLAR CANDELAS
7	1 FOOT SO ILLUMINANCE
8	1 FOOT HO ILLUMINANCE
9	4 FOOT
10	4 FOOT SO POLAR CANDELAS
11	4 FOOT HO POLAR CANDELAS
12	4 FOOT SO ILLUMINANCE
13	4 FOOT HO ILLUMINANCE
14	CHROMATICITY
15	0-10V WIRING
16	ACCESSORIES: MOUNTING TRACK
17	ACCESSORIES: LOUVRES ASYMMETRIC
18	ACCESSORIES: LOUVRES SYMMETRIC
19	ACCESSORIES: LOUVRES HONEYCOMB
20	ACCESSORIES: LOUVRES BLADE
21	ACCESSORIES: CABLES
22	FIXTURES & ACCESSORIES
23	FIXTURES & ACCESSORIES
24	FIXTURES & ACCESSORIES

PHYSICAL

Dimensions	L: 12in (304mm) L: 48in (1219mm)	W: 1 13/16in (46mm) H: 1 3/16in (30mm)
Weight	1ft: 0.38 lbs (0.17kg) 4ft: 1.22 lbs (0.55 kg)	
Applications	Cove, Accent, & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

OUTPUT

Colors	Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Turquoise, Dark Blue, Dark Orange, Dark Red
Beam Angle	200°
Color Bin Tolerance	Zero Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

DIMMING

	Outputs Available
1FT	SO, HO
4FT	SO, HO

MODA TECHNOLOGY

moda**SOFTWARE**[™]

moda**HARDWARE**[™]

moda**DIM**[™]

moda**LED**[™]

moda**MICRO DRIVER**[™]

moda**PHOSPHOR**[™]

moda**ZERO BIN**[™]

moda**THERMAL MANAGEMENT**[™]

moda**AIRFLOW**[™]

moda**COLOR RENDITION**[™]

moda**LOCK**[™]

moda**KWIK CONNECT**[™]


STANDARDS & CERTIFICATIONS



Certification Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.

Class 1

Warranty 5 Year Limited Warranty

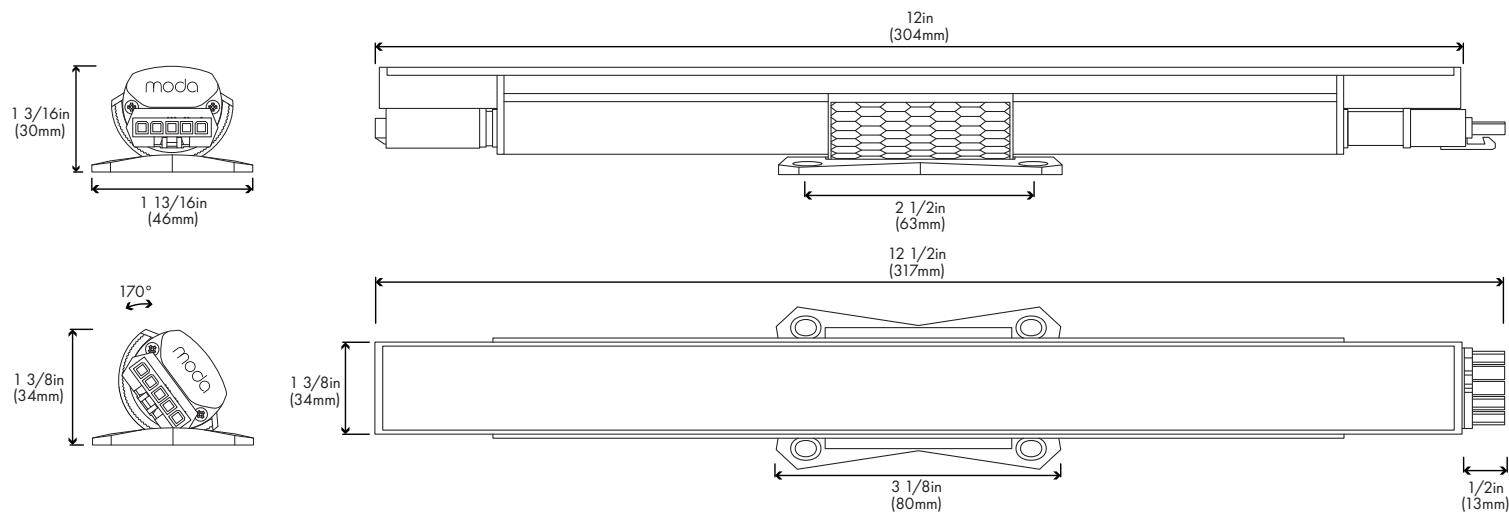

0-10V

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	168	36	31	29
Green	196	42	36	34
Blue	140	30	25	24
Amber	234	50	43	40
Yellow	215	46	39	37
Golden Yellow	509	108	93	88
Ice Blue	429	91	78	74
Cyan	169	36	31	29
Light Green	490	104	89	84
Pink	200	43	36	34
Violet	194	41	35	33
Turquoise	168	36	31	29
Dark Blue	84	18	15	14
Dark Orange	420	89	76	72
Dark Red	39	9	6	6

SO Power Consumption	SO Max Continuous Run*
120V	5W
240V	6.5W
277V	6.5W


*Each connection uses 1mA power. Please check chosen dimmer for any mA restrictions (i.e., 50mA restriction = 50 maximum connections).

High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	336	36	34	34
Green	395	42	40	40
Blue	286	30	29	29
Amber	464	49	47	46
Yellow	430	46	43	43
Golden Yellow	1015	108	103	102
Ice Blue	858	91	87	86
Cyan	338	36	34	34
Light Green	980	104	99	98
Pink	402	43	41	40
Violet	388	41	39	39
Turquoise	341	36	34	34
Dark Blue	168	50	47	47
Dark Orange	840	89	85	84
Dark Red	78	18	12	12


HO Power Consumption	HO Max Continuous Run*
120V	10W
240V	13W
277V	13W

STANDARD OUTPUT


SO Red

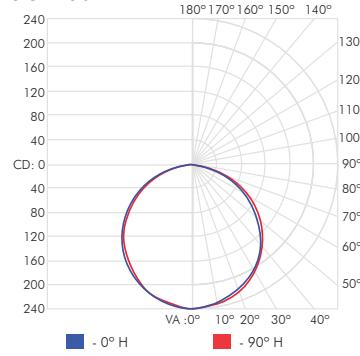


SO Green

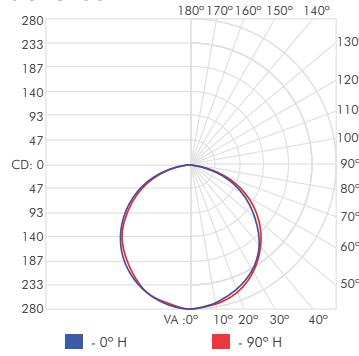


SO Blue

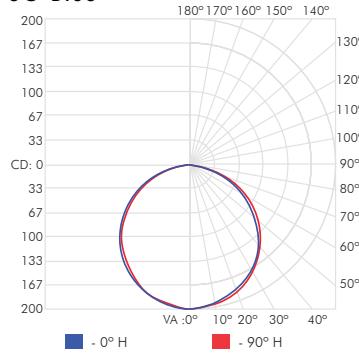


SO Amber

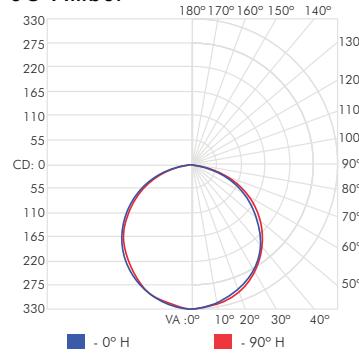


SO Yellow

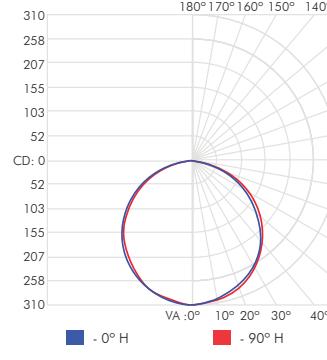


SO Golden Yellow

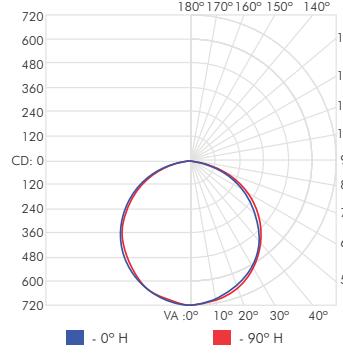


SO Ice Blue

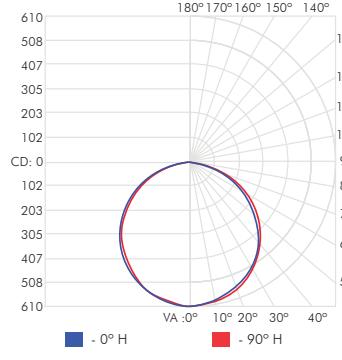


SO Cyan

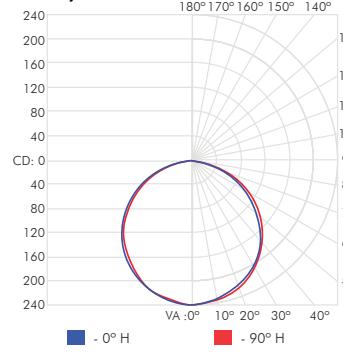


SO Light Green

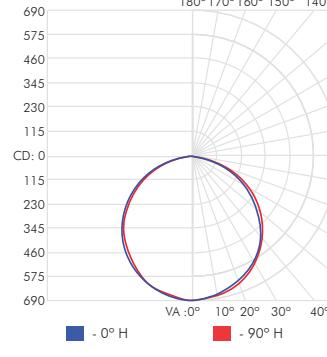


SO Pink

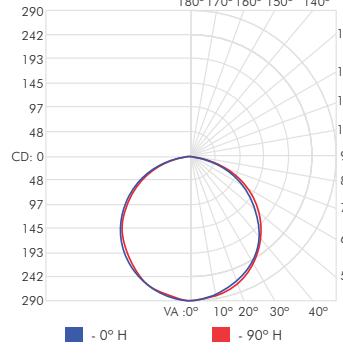


SO Violet

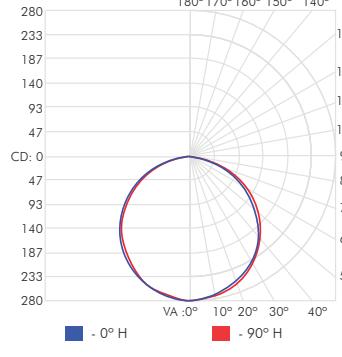


SO Turquoise

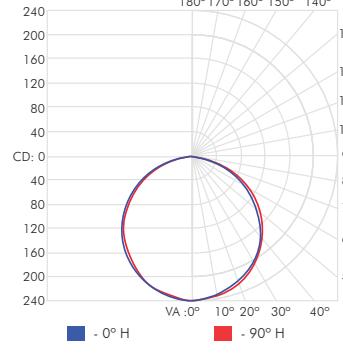


SO Dark Blue

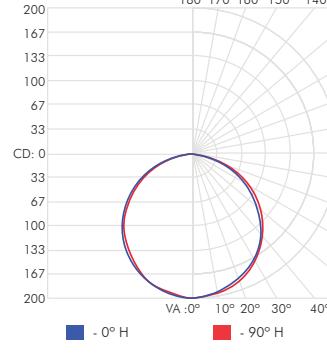

SO Dark Orange

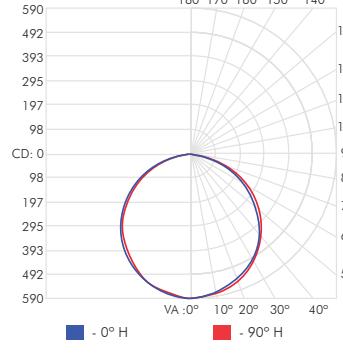


SO Dark Red

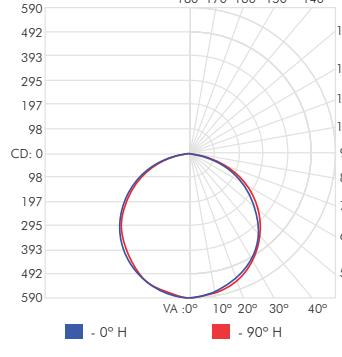


HIGH OUTPUT


SO Red

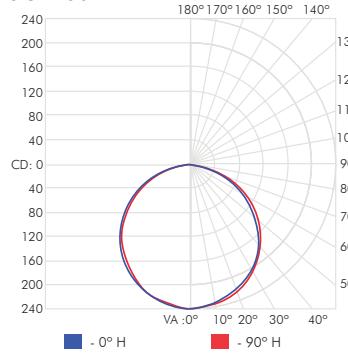


SO Green

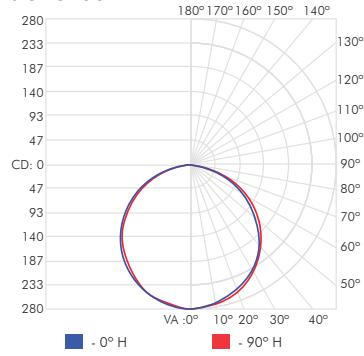


SO Blue

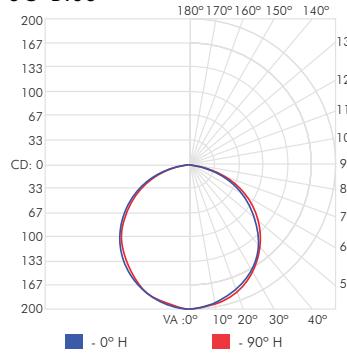


SO Amber

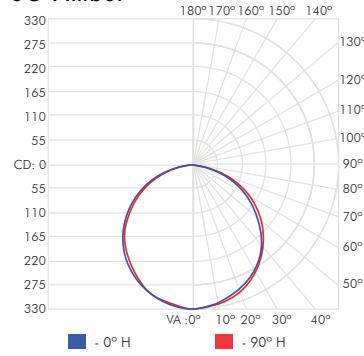


SO Yellow

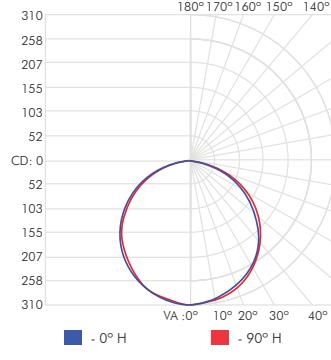


SO Golden Yellow

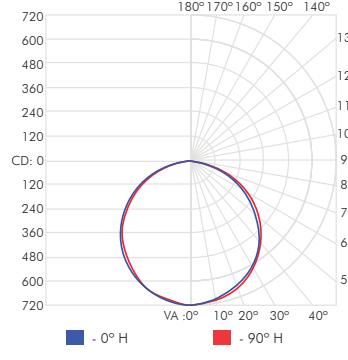


SO Ice Blue

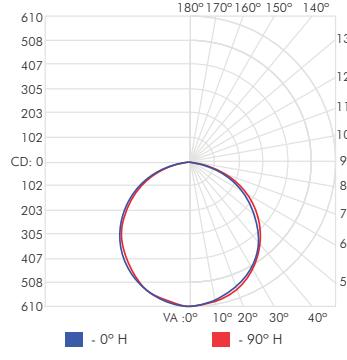


SO Cyan

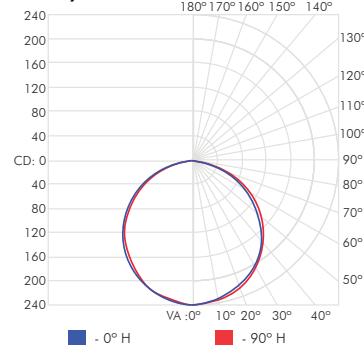


SO Light Green

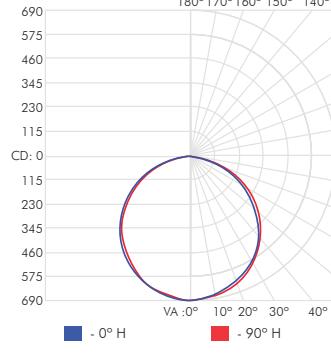


SO Pink

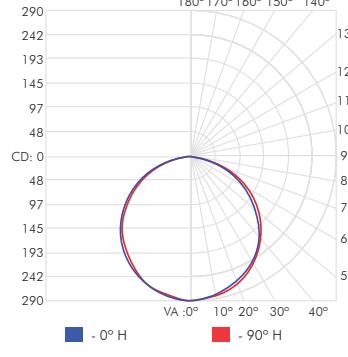


SO Violet

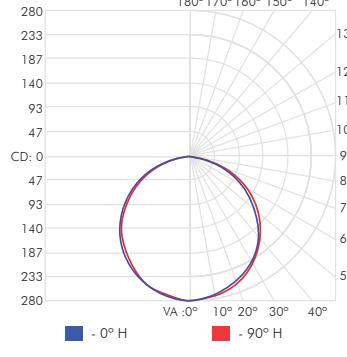


SO Turquoise

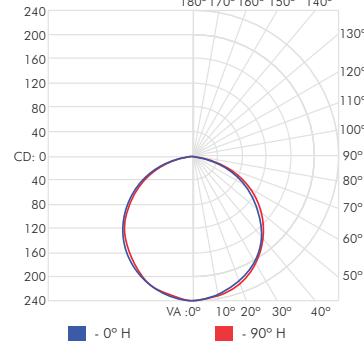


SO Dark Blue

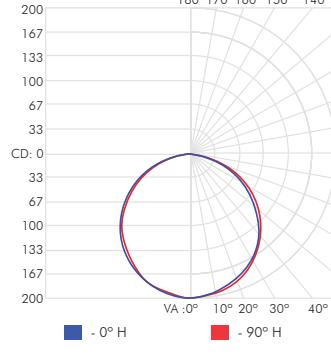

SO Dark Orange

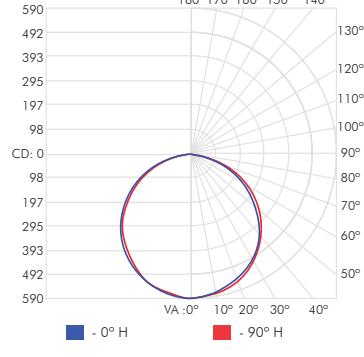


SO Dark Red

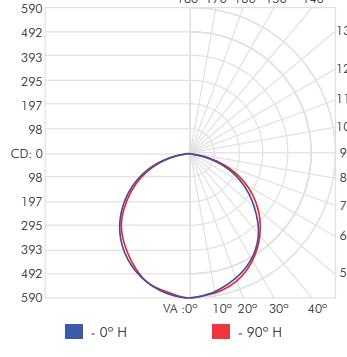


STANDARD OUTPUT


SO Red

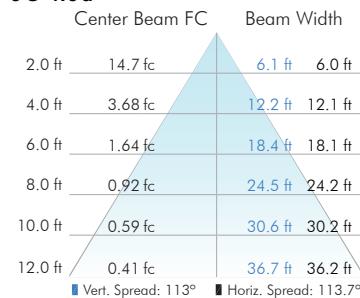


SO Green

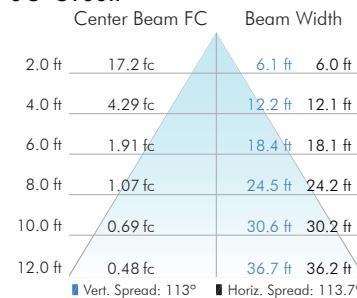


SO Blue

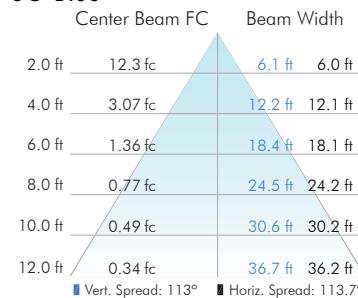


SO Amber

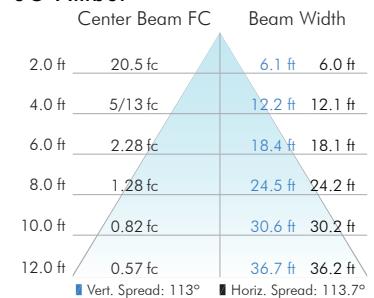


SO Yellow

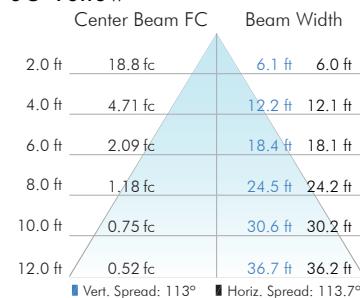


SO Golden Yellow

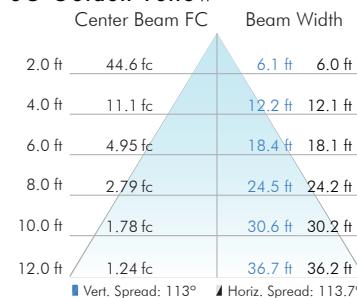


SO Ice Blue

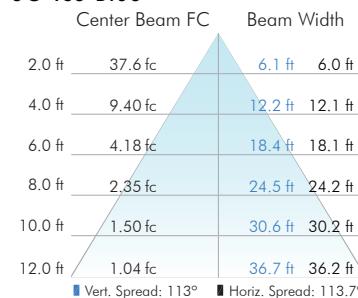


SO Cyan

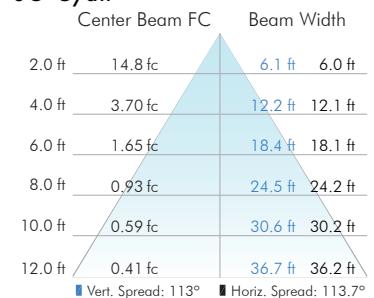


SO Light Green

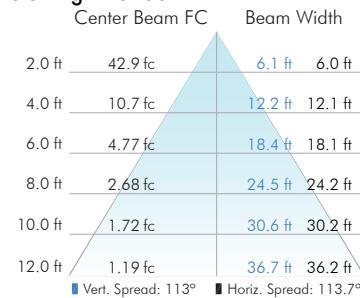


SO Pink

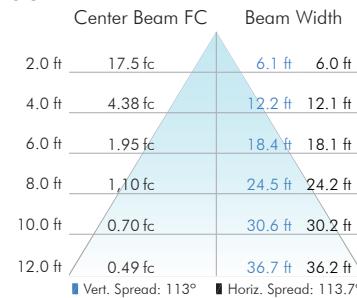


SO Violet

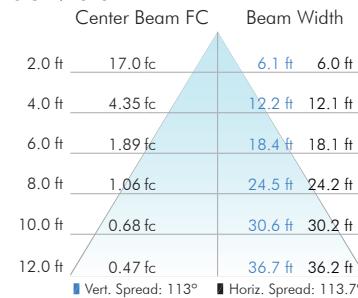


SO Turquoise

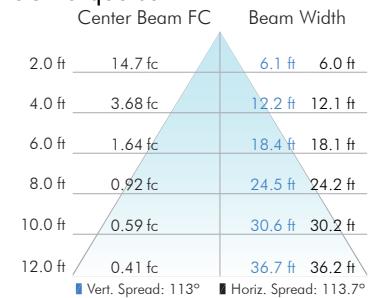


SO Dark Blue

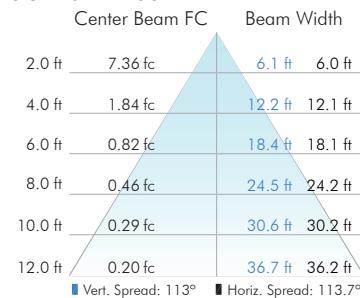

SO Dark Orange

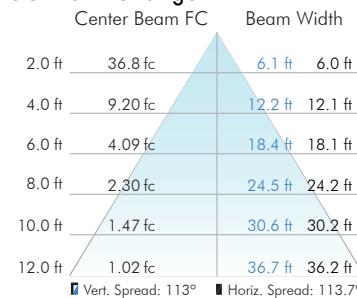


SO Dark Red

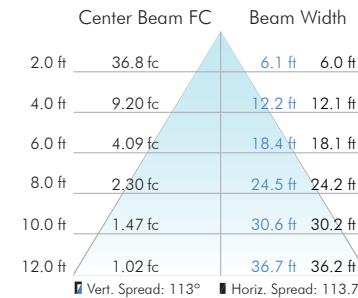


HIGH OUTPUT


HO Red

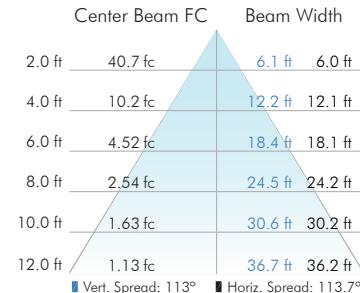


HO Green

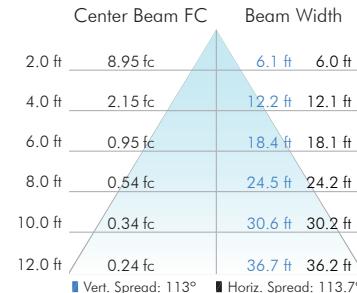


HO Blue

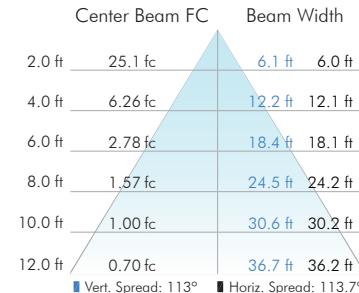


HO Amber

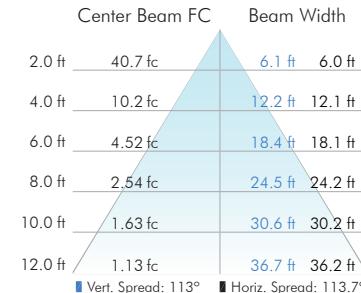


HO Yellow

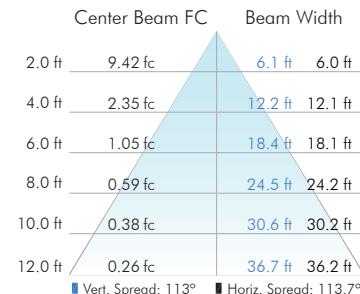


HO Golden Yellow

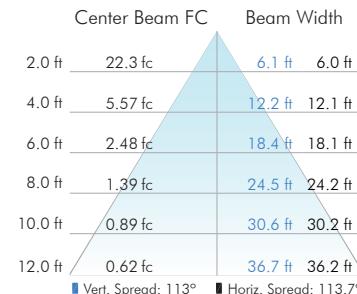


HO Ice Blue

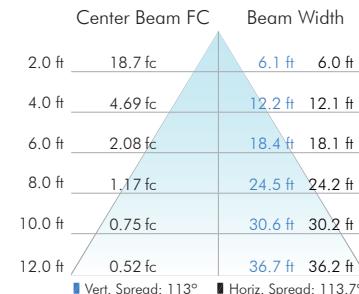


HO Cyan

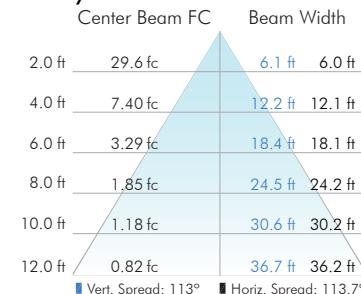


HO Light Green

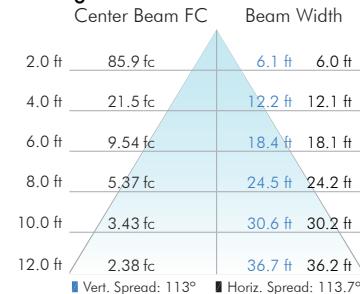


HO Pink

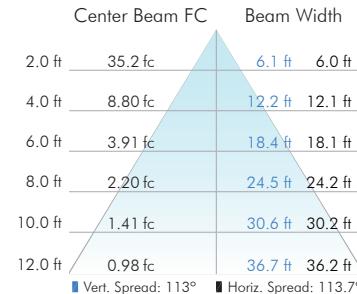


HO Violet

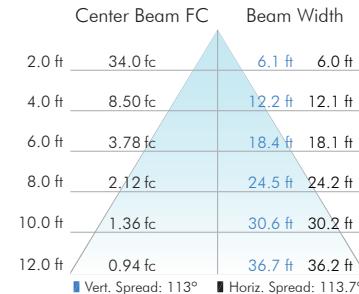


HO Turquoise

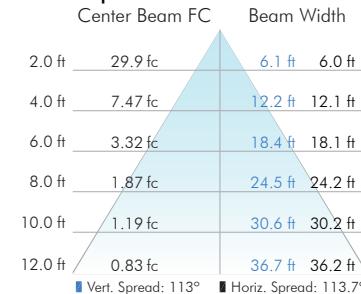


HO Dark Blue

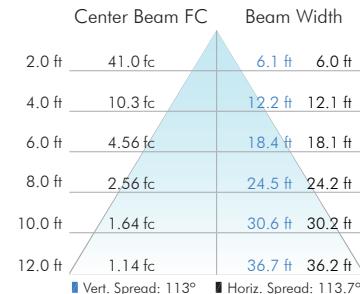


HO Dark Orange

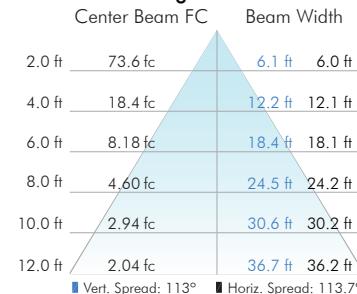

HO Dark Red

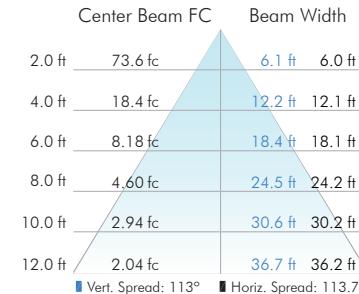

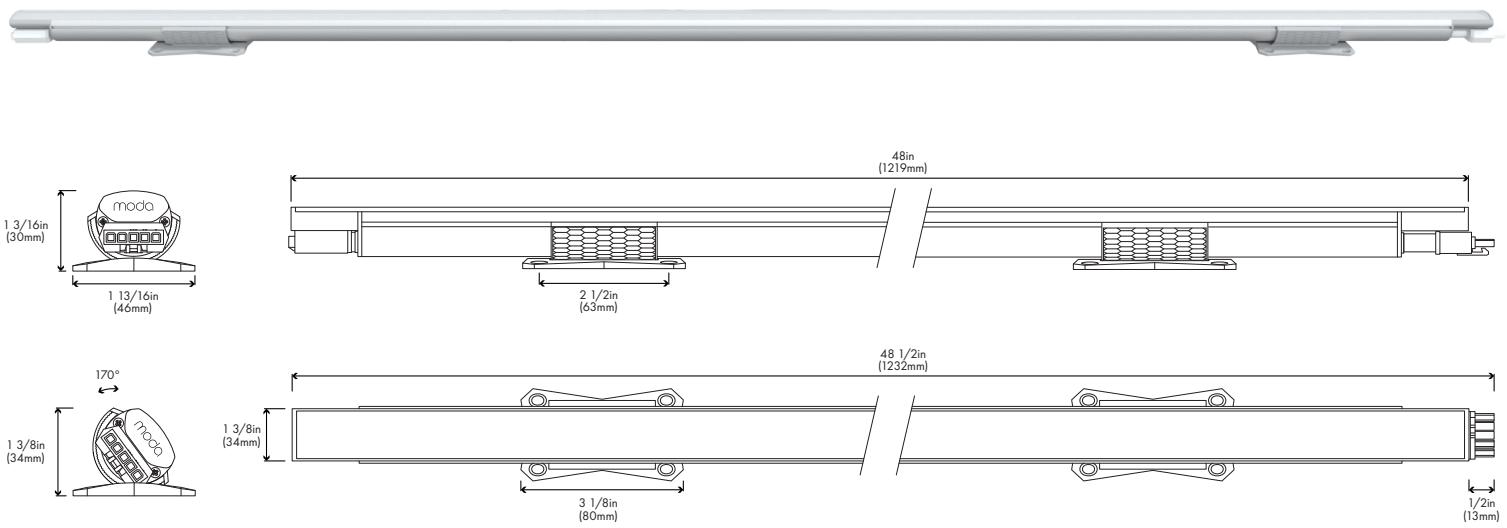

0-10V


Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	672	38	35	34
Green	784	44	41	40
Blue	560	32	29	29
Amber	936	53	48	48
Yellow	860	49	45	44
Golden Yellow	2036	115	105	104
Ice Blue	1716	97	89	88
Cyan	676	38	35	35
Light Green	1960	111	102	101
Pink	800	45	41	41
Violet	776	44	40	40
Turquoise	672	38	35	34
Dark Blue	336	19	17	17
Dark Orange	1680	95	87	86
Dark Red	156	36	24	24
SO Power Consumption				
120V	19W	120V AC	120 ft	
240V	20W	240V AC	240 ft	
277V	20W	277V AC	240 ft	

*Each connection uses 1mA power. Please check chosen dimmer for any mA restrictions (i.e., 50mA restriction = 50 maximum connections).


High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	1344	36	35	34
Green	1568	42	41	40
Blue	1120	30	29	29
Amber	1872	51	49	48
Yellow	1720	46	45	44
Golden Yellow	4072	110	107	104
Ice Blue	3432	93	90	88
Cyan	1352	37	36	35
Light Green	3920	106	103	101
Pink	1600	43	42	41
Violet	1552	42	41	40
Turquoise	1348	36	35	35
Dark Blue	672	51	49	48
Dark Orange	3360	91	88	86
Dark Red	312	72	48	48
HO Power Consumption				
120V	40W	120V AC	50 ft	
240V	52W	240V AC	100 ft	
277V	52W	277V AC	100 ft	

STANDARD OUTPUT


SO Red

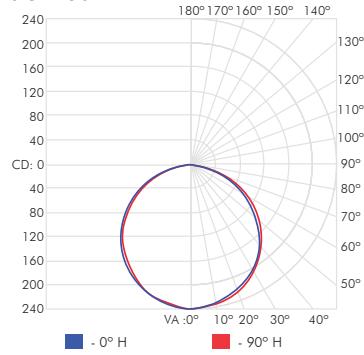


SO Green

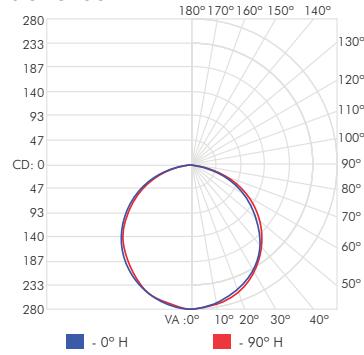


SO Blue

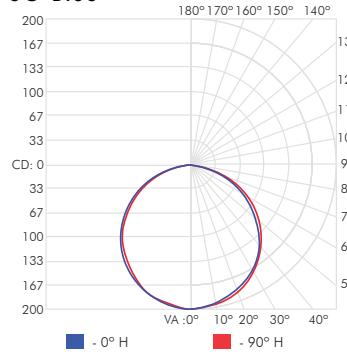


SO Amber

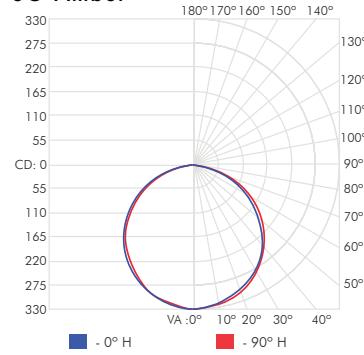


SO Yellow

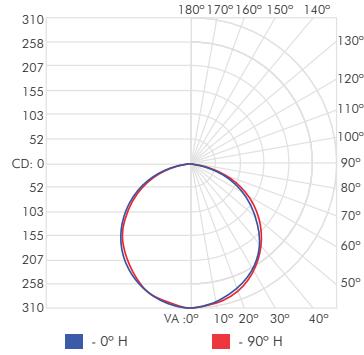


SO Golden Yellow

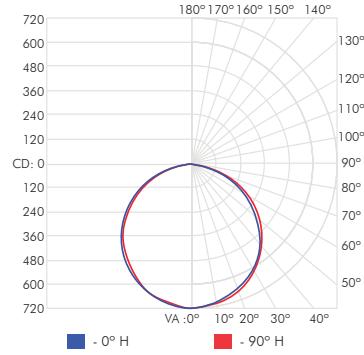


SO Ice Blue

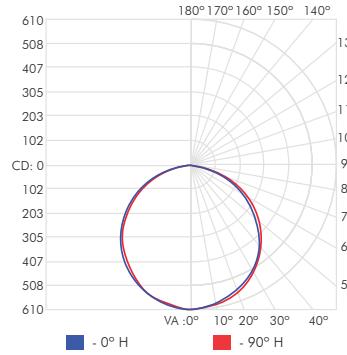


SO Cyan

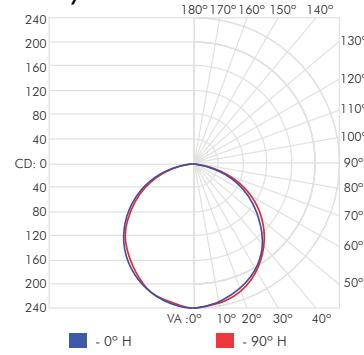


SO Light Green

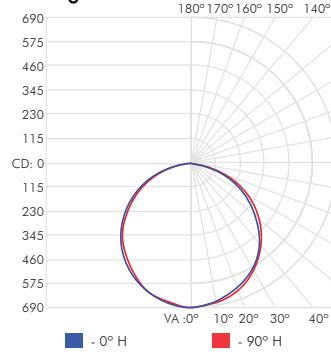


SO Pink

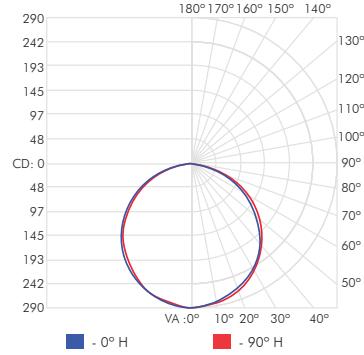


SO Violet

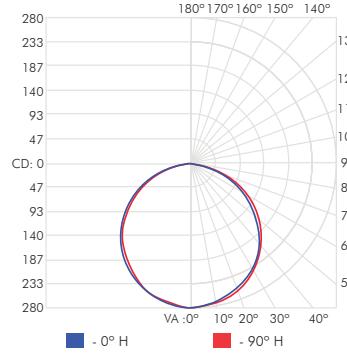


SO Turquoise

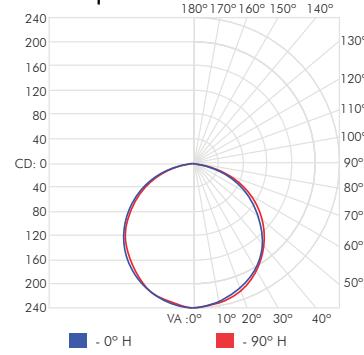


SO Dark Blue

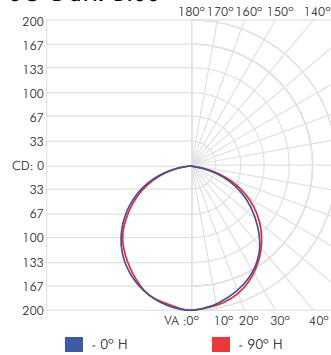

SO Dark Orange

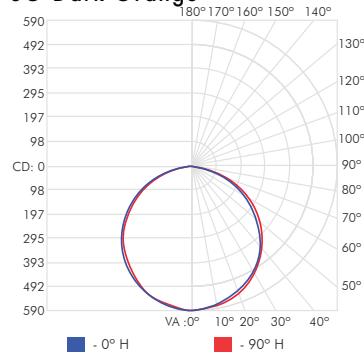


SO Dark Red

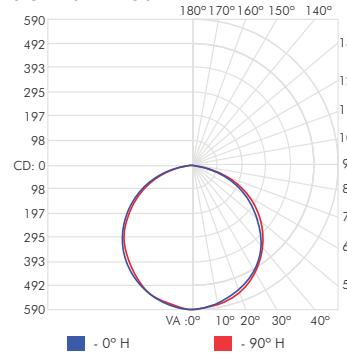


HIGH OUTPUT


HO Red

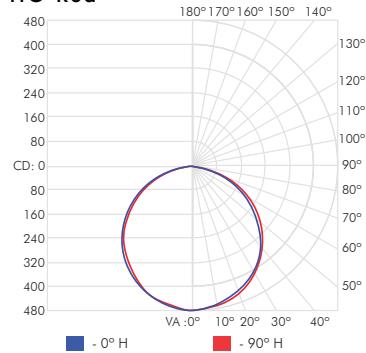


HO Green

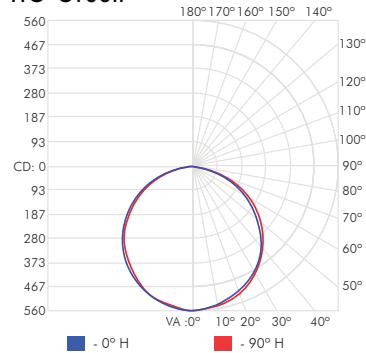


HO Blue

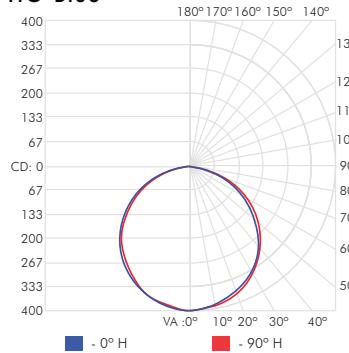


HO Amber

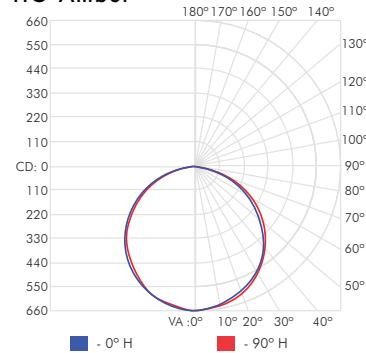


HO Yellow

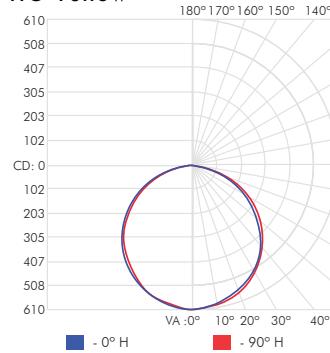


HO Golden Yellow

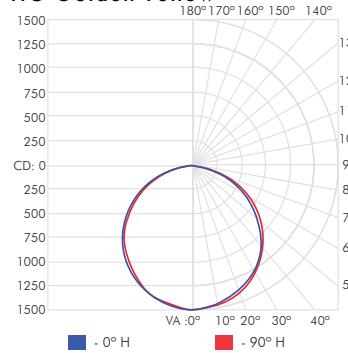


HO Ice Blue

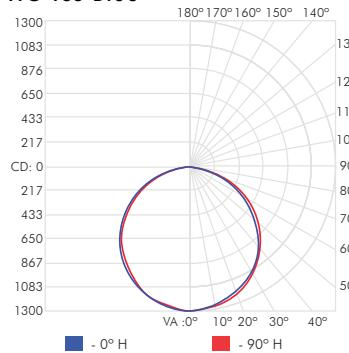


HO Cyan

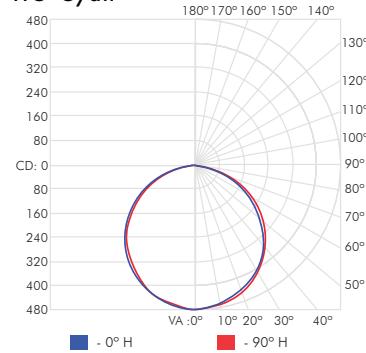


HO Light Green

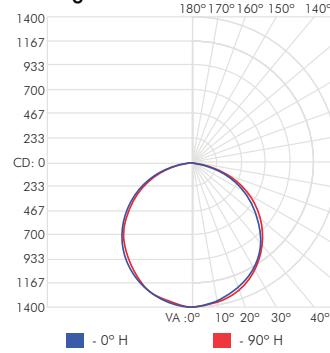


HO Pink

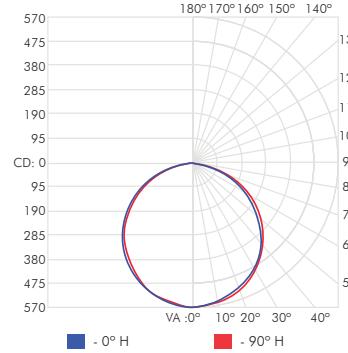


HO Violet

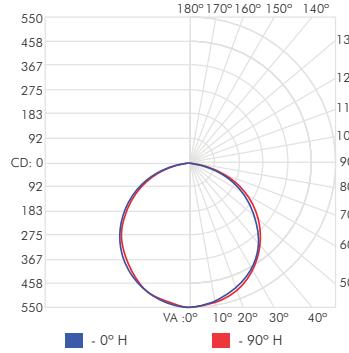


HO Turquoise

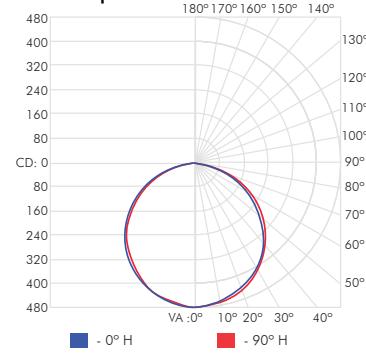


HO Dark Blue

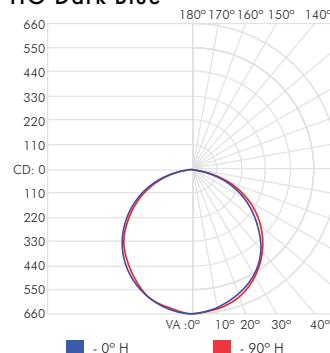

HO Dark Orange

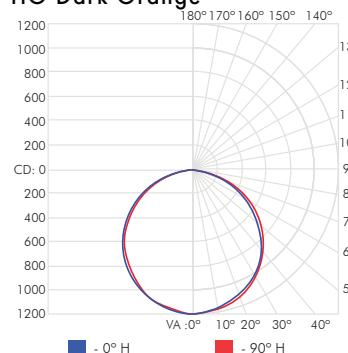


HO Dark Red

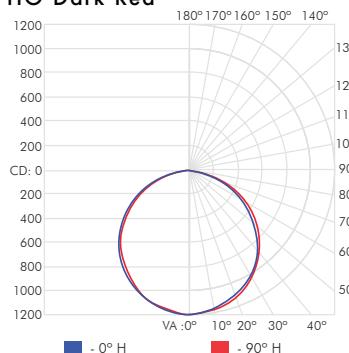


STANDARD OUTPUT


SO Red

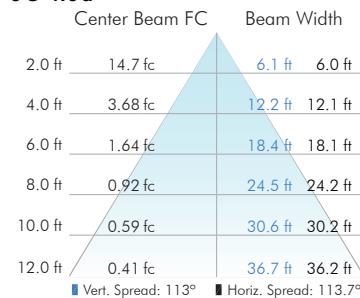


SO Green

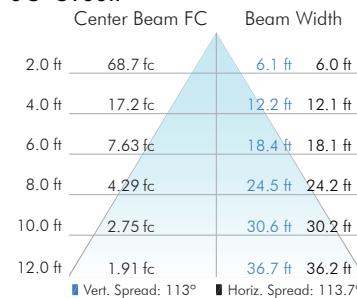


SO Blue

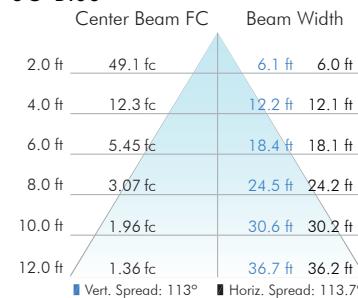


SO Amber

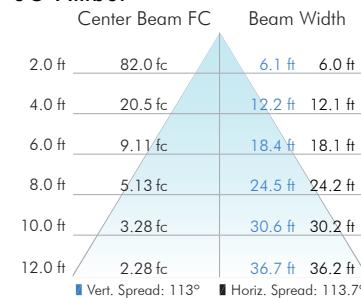


SO Yellow

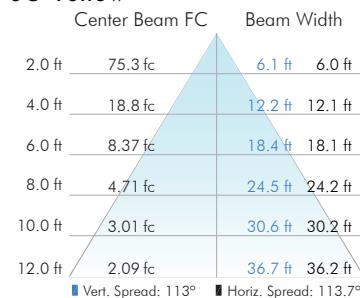


SO Golden Yellow

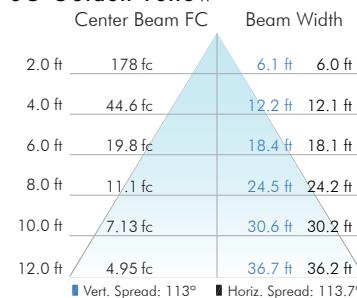


SO Ice Blue

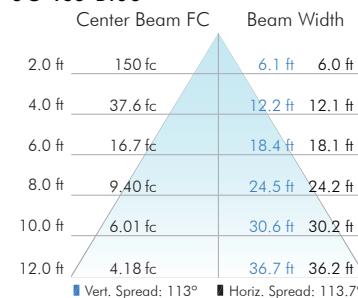


SO Cyan

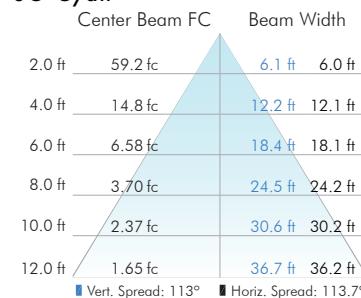


SO Light Green

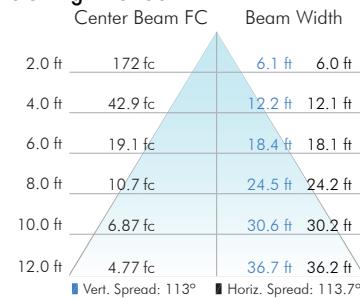


SO Pink

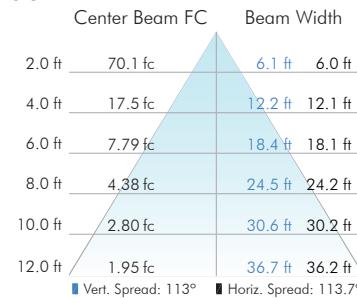


SO Violet

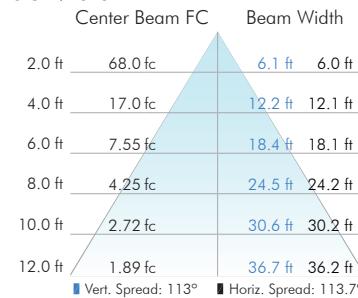


SO Turquoise

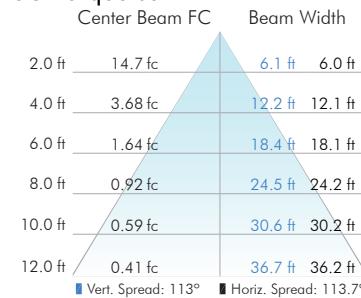


SO Dark Blue

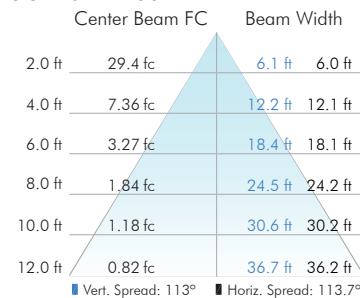

SO Dark Orange

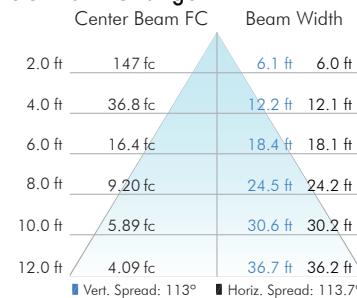


SO Dark Red

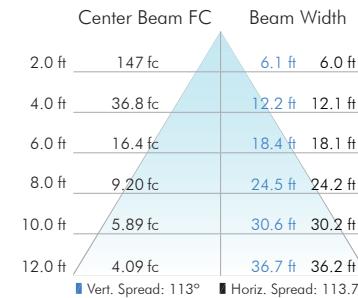


HIGH OUTPUT


HO Red

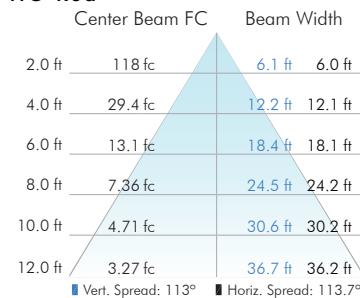


HO Green

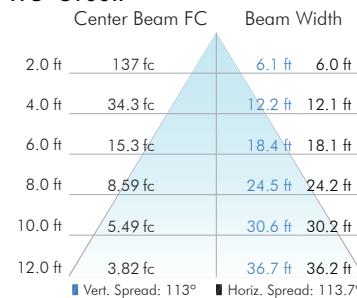


HO Blue

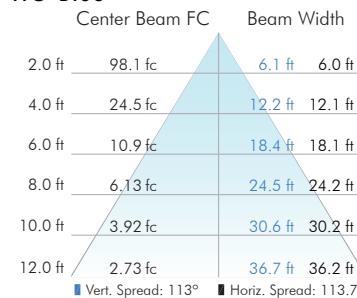


HO Amber

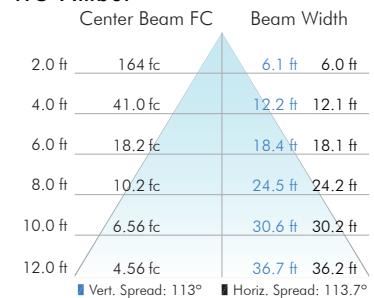


HO Yellow

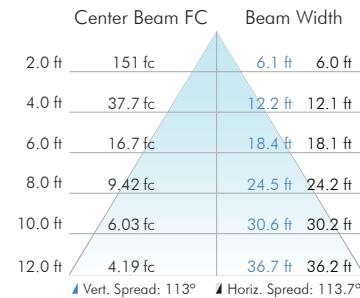


HO Golden Yellow

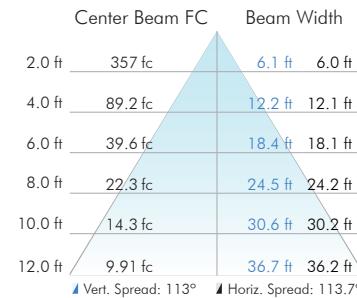


HO Ice Blue

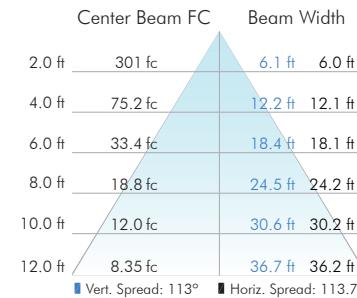


HO Cyan

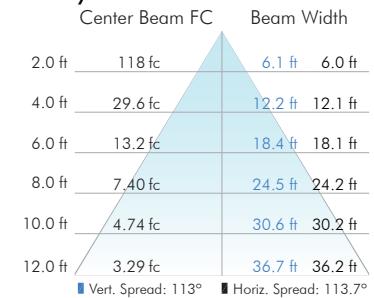


HO Light Green

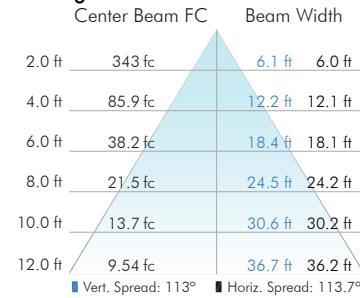


HO Pink

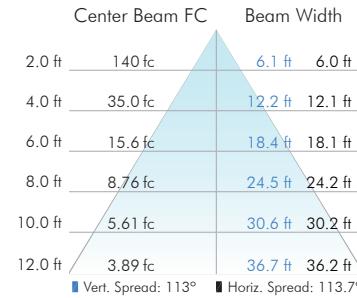


HO Violet

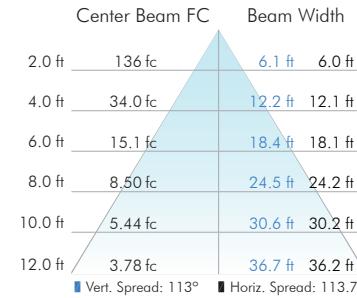


HO Turquoise

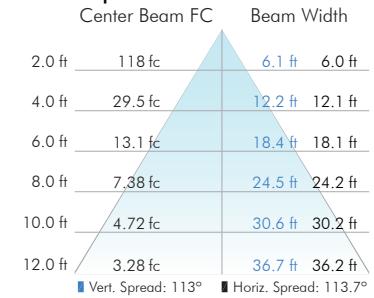


HO Dark Blue

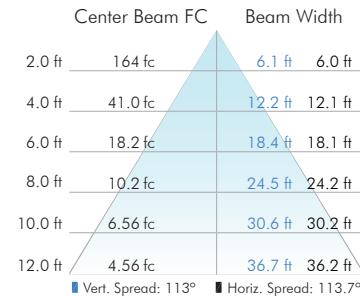


HO Dark Orange

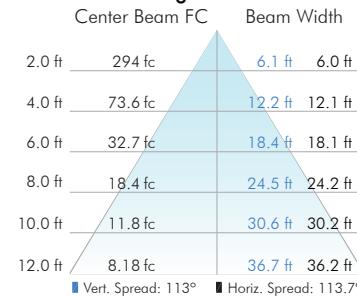


HO Dark Red

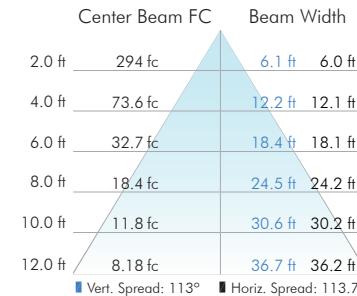


CIE 1931 Chromaticity Diagram

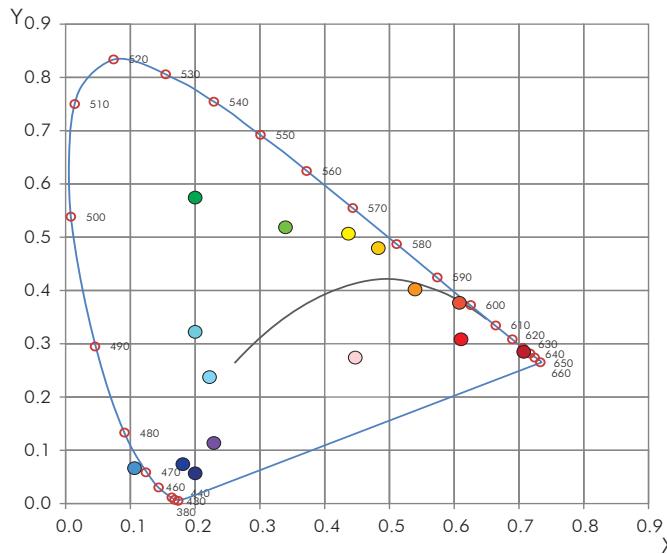

Color	Coordinate	Wavelength
Red	x: 0.6221 y: 0.3174 u: 0.4482 v: 0.5111	620nm
Green	x: 0.2075 y: 0.5883 u: 0.0835 v: 0.5445	520nm
Blue	x: 0.1804 y: 0.0715 u: 0.2158 v: 0.1834	445nm
Amber	x: 0.5415 y: 0.4189 u: 0.3145 v: 0.5412	611nm
Yellow	x: 0.4441 y: 0.5161 u: 0.2140 v: 0.5593	557nm
Golden Yellow	x: 0.4814 y: 0.4892 u: 0.2438 v: 0.5568	583nm
Ice Blue	x: 0.2317 y: 0.2495 u: 0.1676 v: 0.4059	446nm
Cyan	x: 0.1158 y: 0.0735 u: 0.3234 v: 0.5522	473nm
Light Green	x: 0.3458 y: 0.5241 u: 0.1611 v: 0.5487	534nm
Pink	x: 0.4547 y: 0.2832 u: 0.3342 v: 0.4649	621nm
Violet	x: 0.2337 y: 0.1275 u: 0.2301 v: 0.2823	448nm
Turquoise	x: 0.2047 y: 0.3361 u: 0.1852 v: 0.5652	485nm
Dark Blue	x: 0.1542 y: 0.0259 u: 0.2055 v: 0.0776	443nm
Dark Orange	x: 0.6130 y: 0.3791 u: 0.3878 v: 0.5396	622nm
Dark Red	x: 0.7117 y: 0.2759 u: 0.5825 v: 0.5080	672nm



UL / cUL Dimming

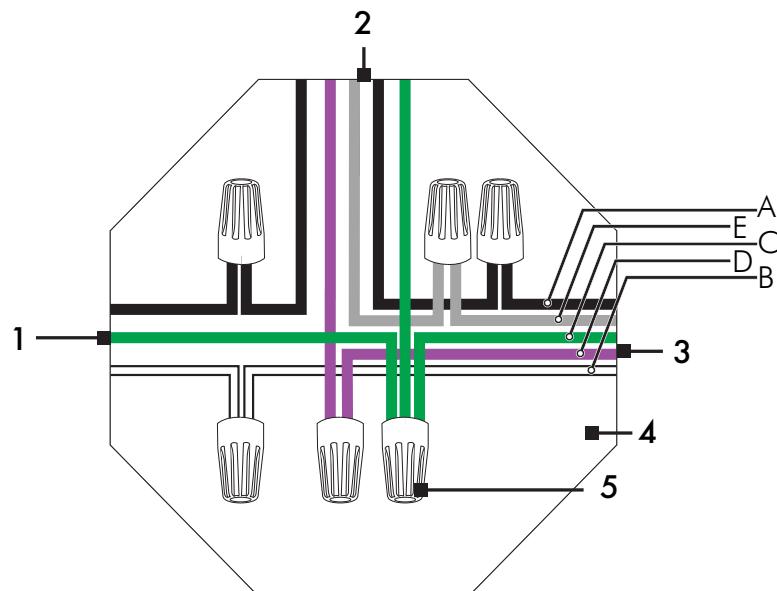

Wiring Legend


1	Power 100-277V AC
2	0-10V Dimmer
3	5 Pin Leader Cable
4	Junction Box
5	Wiring Nuts

5 Pin Leader Cable


	UL/cUL	CE/CCC*
A	Live 100-277V	— Black — Brown
B	Neutral	— White — Blue
C	Ground	— Green — Green/Yellow
D	Data Positive	— Purple — Black
E	Data Negative	— Gray — Gray

*Not illustrated



0-10V Connectors



Angle Adjustment




Female Output



Compatible Dimmers

Please visit our website for a list of compatible dimmers.

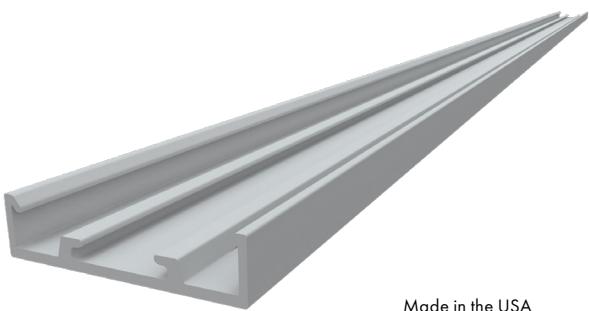

Made in the USA

MODA MINI COVE MOUNTING TRACK

MOUNTING MINI COVE

Allows users to install Moda Mini Cove fixtures in a continuous linear position. Moda Mini Cove Mounting Tracks come packaged in 5 pieces of 4ft sections to create a continuous run of 20ft.

Made in the USA.

Options

Finish G - Gray

Length 4ft - 4ft Sections

Quantity 5 Pieces (20ft)

Physical

Applications Cove, Accent

Construction ABS Plastic



MODA MINI COVE TRACK CONNECTOR

Joins two pieces of track together.

Accepts screw sizes






Drywall	#6	#8
---------	----	----



Self tapping	#6	#8
--------------	----	----

Concrete Anchor	3/16in
-----------------	--------

(By others)

ACCESSORIES: MOUNTING TRACK

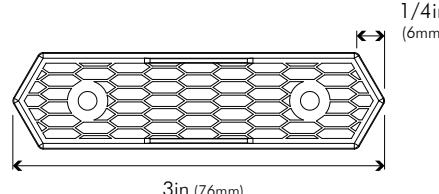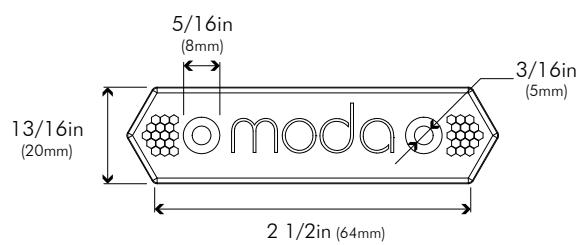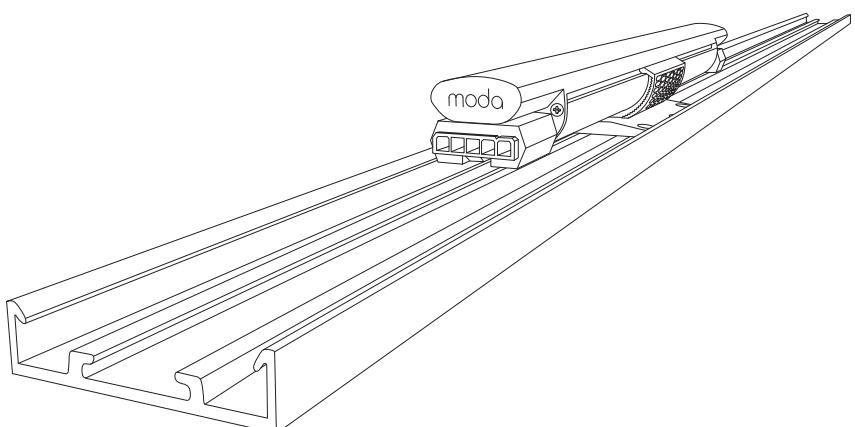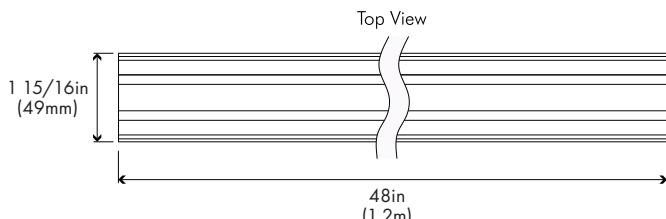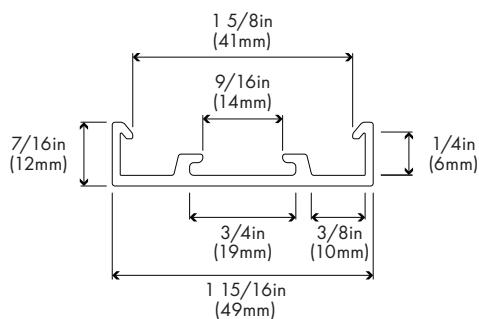

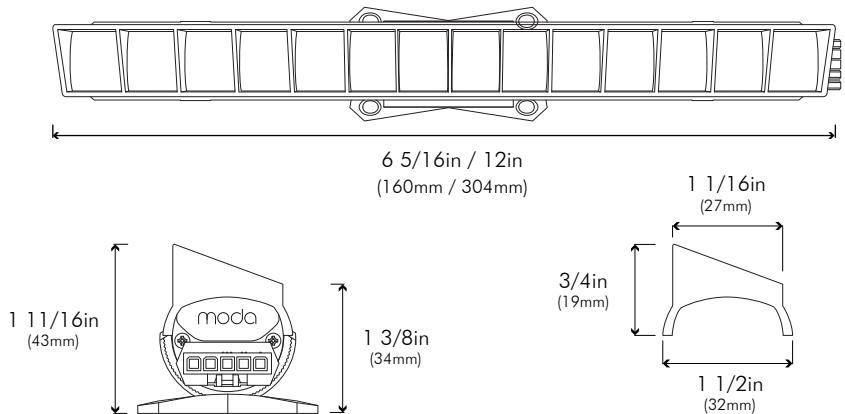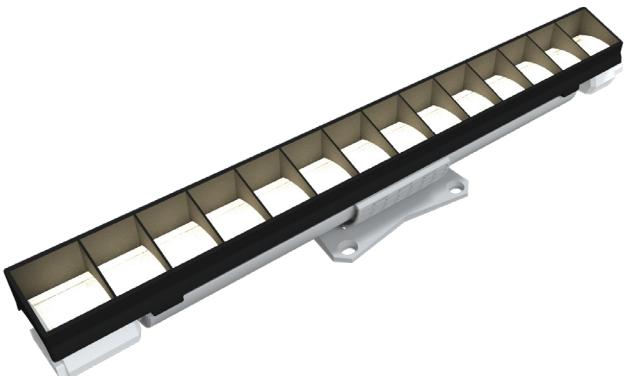

MODA MINI COVE LOUVERS ASYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features


- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected



Options

Finish	B - BLACK
Length	1FT

Physical

Applications	Cove, Accent, Graze
Construction	ABS

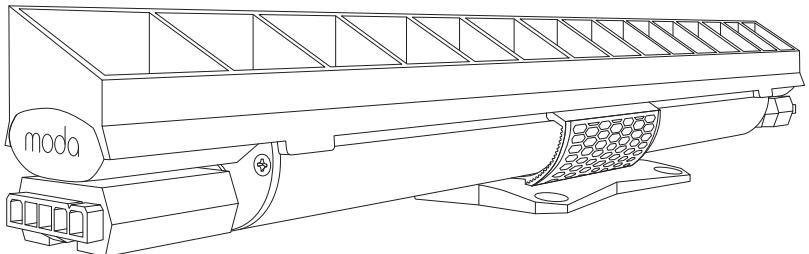

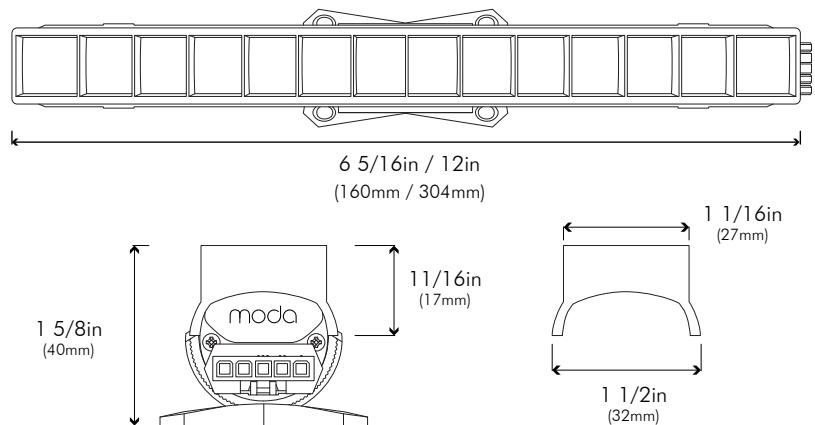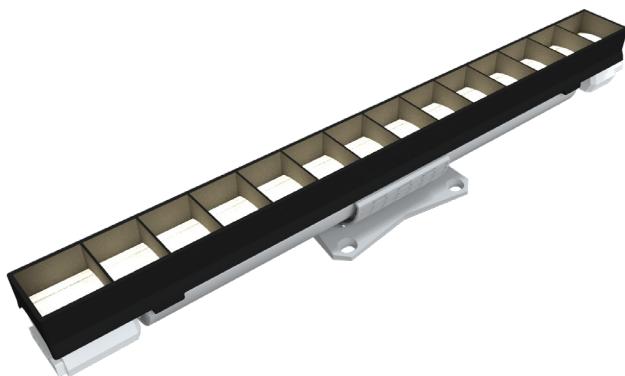

MODA MINI COVE LOUVERS

SYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options


Finish B - BLACK


Length 1FT

Physical

Applications Cove, Accent, Graze

Construction ABS

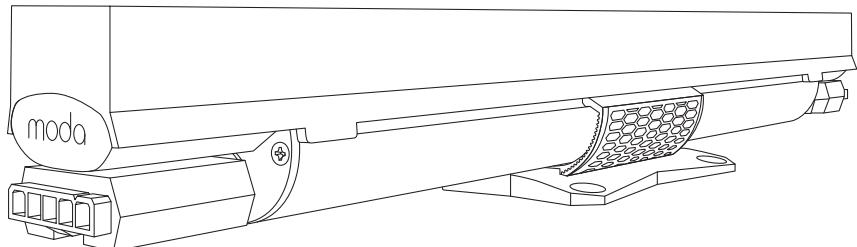

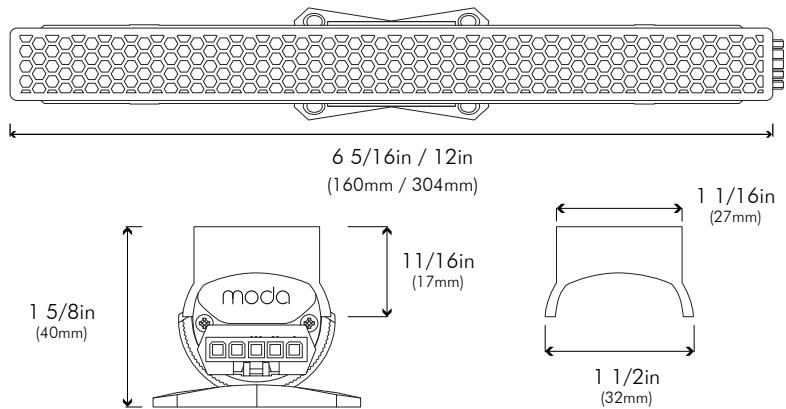

MODA MINI COVE LOUVERS HONEYCOMB

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected


Options


Finish	B - BLACK
Length	1FT

Physical

Applications	Cove, Accent, Graze
--------------	---------------------

Construction	ABS
--------------	-----

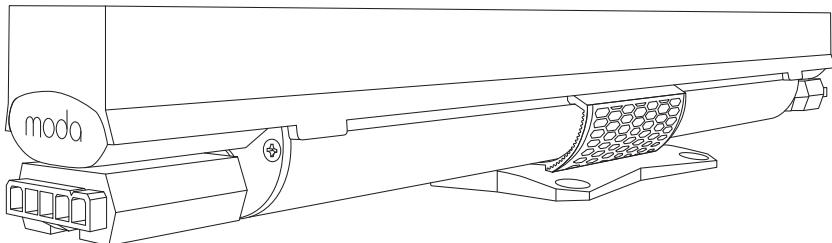

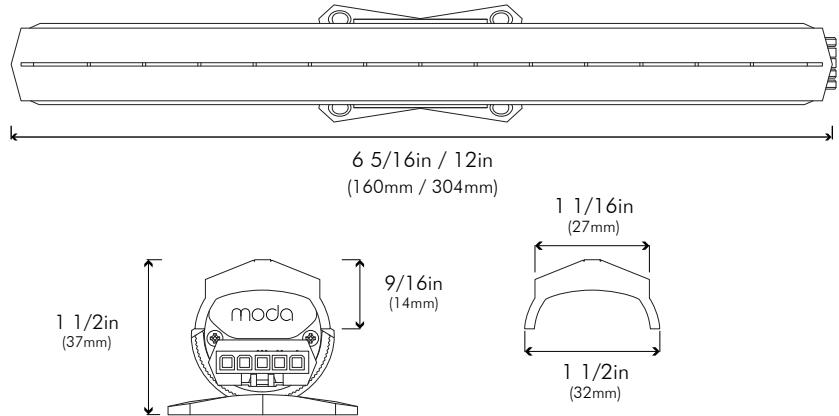

MODA MINI COVE LOUVERS BLADE

Add visual interest to any space by creating a narrow line of light, which can be seen in semi direct view or reflected off the wall or ceiling when integrated into a cove or niche. Use four 1ft louvers for a 4ft fixture.


Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options

Finish	B - BLACK
Length	1FT

Physical Applications	Cove, Accent, Graze
Construction	ABS

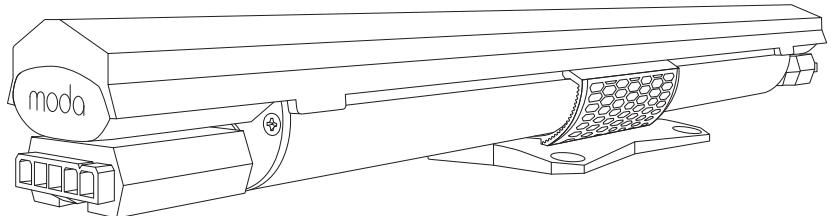

0-10V LEADER CABLES

Moda Mini Cove Interior 5 Pin Leader Cables

UL/cUL


EU/CCC

Lengths	10ft and 25ft	3m and 10m
Color	White	White

UL/cUL
10FT or 25FT

EU/CCC
3M or 10M


Male Connector

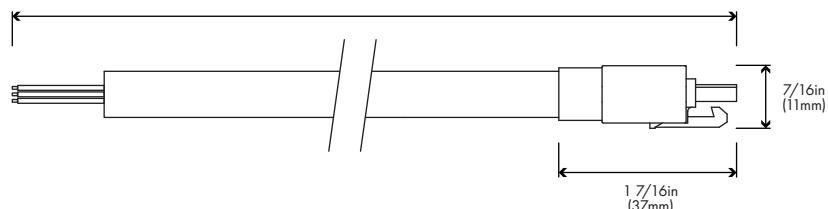


Male Connector

Front

Top

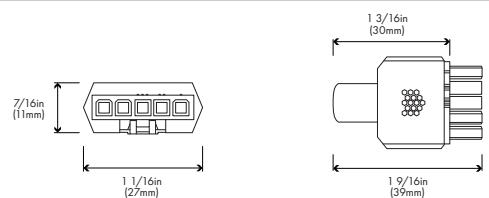

Pin Assignment



UL/cUL EU/CCC

1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/Yellow
4	Data Positive	Purple	Black
5	Data Negative	Gray	Gray

0-10V JUMPER CABLES

Moda Mini Cove Interior 5 Pin Jumper Cables

UL/cUL

EU/CCC


Lengths	1ft and 4ft	300mm and 1m
Color	White	White

Female Connector

UL/cUL
10FT or 25FT

EU/CCC
3M or 10M


Male Connector

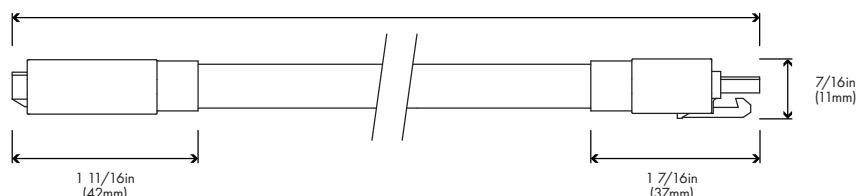


Connectors

Front

Top

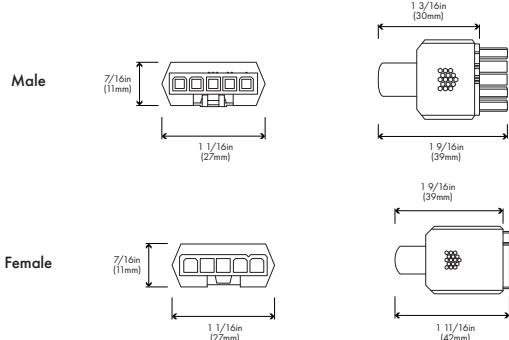


Pin Assignment



UL/cUL EU/CCC

1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/Yellow
4	Data Positive	Purple	Black
5	Data Negative	Gray	Gray



Female

	UL/cUL	EU/CCC
1	Data Negative	Gray
2	Data Positive	Purple
3	Ground	Green
4	Neutral	White
5	Live 100-277V	Black

Fixture	Part Number	Ordering SKU
0-10V SO 1FT	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Red 1FT	MMCI-S-S-0-R-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Green 1FT	MMCI-S-S-0-G-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Blue 1FT	MMCI-S-S-0-B-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Amber 1FT	MMCI-S-S-0-A-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Yellow 1FT	MMCI-S-S-0-Y-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Pink 1FT	MMCI-S-S-0-P-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Cyan 1FT	MMCI-S-S-0-C-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Violet 1FT	MMCI-S-S-0-V-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Turquoise 1FT	MMCI-S-S-0-TQ-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Ice Blue 1FT	MMCI-S-S-0-IB-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Light Green 1FT	MMCI-S-S-0-LG-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Golden Yellow 1FT	MMCI-S-S-0-GY-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Dark Blue 1FT	MMCI-S-S-0-DB-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Dark Orange 1FT	MMCI-S-S-0-DO-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Dark Red 1FT	MMCI-S-S-0-DR-1
0-10V HO 1FT	Moda Mini Cove Interior High Output Silver 0-10V Dimming Red 1FT	MMCI-H-S-0-R-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Green 1FT	MMCI-H-S-0-G-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Blue 1FT	MMCI-H-S-0-B-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Amber 1FT	MMCI-H-S-0-A-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Yellow 1FT	MMCI-H-S-0-Y-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Pink 1FT	MMCI-H-S-0-P-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Cyan 1FT	MMCI-H-S-0-C-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Violet 1FT	MMCI-H-S-0-V-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Turquoise 1FT	MMCI-H-S-0-TQ-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Ice Blue 1FT	MMCI-H-S-0-IB-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Light Green 1FT	MMCI-H-S-0-LG-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Golden Yellow 1FT	MMCI-H-S-0-GY-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Dark Blue 1FT	MMCI-H-S-0-DB-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Dark Orange 1FT	MMCI-H-S-0-DO-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming Dark Red 1FT	MMCI-H-S-0-DR-1

Fixture	Part Number	Ordering SKU
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Red 4FT	MMCI-S-S-0-R-4	096-3000
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Green 4FT	MMCI-S-S-0-G-4	096-3001
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Blue 4FT	MMCI-S-S-0-B-4	096-3002
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Amber 4FT	MMCI-S-S-0-A-4	096-3003
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Yellow 4FT	MMCI-S-S-0-Y-4	096-3004
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Pink 4FT	MMCI-S-S-0-P-4	096-3005
0-10V Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Cyan 4FT	MMCI-S-S-0-C-4	096-3006
SO Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Violet 4FT	MMCI-S-S-0-V-4	096-3007
4FT Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Turquoise 4FT	MMCI-S-S-0-TQ-4	096-3008
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Ice Blue 4FT	MMCI-S-S-0-IB-4	096-3009
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Light Green 4FT	MMCI-S-S-0-LG-4	096-3010
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Golden Yellow 4FT	MMCI-S-S-0-GY-4	096-3011
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Dark Blue 4FT	MMCI-S-S-0-DB-4	096-3012
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Dark Orange 4FT	MMCI-S-S-0-DO-4	096-3013
Moda Mini Cove Interior Standard Output Silver 0-10V Dimming Dark Red 4FT	MMCI-S-S-0-DR-4	096-3014
Moda Mini Cove Interior High Output Silver 0-10V Dimming Red 4FT	MMCI-H-S-0-R-4	096-3200
Moda Mini Cove Interior High Output Silver 0-10V Dimming Green 4FT	MMCI-H-S-0-G-4	096-3201
Moda Mini Cove Interior High Output Silver 0-10V Dimming Blue 4FT	MMCI-H-S-0-B-4	096-3202
Moda Mini Cove Interior High Output Silver 0-10V Dimming Amber 4FT	MMCI-H-S-0-A-4	096-3203
Moda Mini Cove Interior High Output Silver 0-10V Dimming Yellow 4FT	MMCI-H-S-0-Y-4	096-3204
Moda Mini Cove Interior High Output Silver 0-10V Dimming Pink 4FT	MMCI-H-S-0-P-4	096-3205
0-10V Moda Mini Cove Interior High Output Silver 0-10V Dimming Cyan 4FT	MMCI-H-S-0-C-4	096-3206
HO Moda Mini Cove Interior High Output Silver 0-10V Dimming Violet 4FT	MMCI-H-S-0-V-4	096-3207
4FT Moda Mini Cove Interior High Output Silver 0-10V Dimming Turquoise 4FT	MMCI-H-S-0-TQ-4	096-3208
Moda Mini Cove Interior High Output Silver 0-10V Dimming Ice Blue 4FT	MMCI-H-S-0-IB-4	096-3209
Moda Mini Cove Interior High Output Silver 0-10V Dimming Light Green 4FT	MMCI-H-S-0-LG-4	096-3210
Moda Mini Cove Interior High Output Silver 0-10V Dimming Golden Yellow 4FT	MMCI-H-S-0-GY-4	096-3211
Moda Mini Cove Interior High Output Silver 0-10V Dimming Dark Blue 4FT	MMCI-H-S-0-DB-4	096-3212
Moda Mini Cove Interior High Output Silver 0-10V Dimming Dark Orange 4FT	MMCI-H-S-0-DO-4	096-3213
Moda Mini Cove Interior High Output Silver 0-10V Dimming Dark Red 4FT	MMCI-H-S-0-DR-4	096-3214

modaLIGHT®

PRODUCT GUIDE

ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Leader Cable US 5 Pin 10FT	Power to first fixture of run	MLCI-US-5PIN-W-10FT	299-0100
Leader Cable US 5 Pin 25FT	Power to first fixture of run	MLCI-US-5PIN-W-25FT	299-0102
Jumper Cable US 5 Pin 1FT	Connection between fixtures	MJCI-US-5PIN-W-1FT	299-1100
Jumper Cable US 5 Pin 4FT	Connection between fixtures	MJCI-US-5PIN-W-4FT	299-1102
Leader Cable EU 5 Pin 3M	Power to first fixture of run	MLCI-EU-5PIN-W-3M	299-0101
Leader Cable EU 5 Pin 10M	Power to first fixture of run	MLCI-EU-5PIN-W-10M	299-0103
Jumper Cable EU 5 Pin 300MM	Connection between fixtures	MJCI-EU-5PIN-W-300MM	299-1101
Jumper Cable EU 5 Pin 1M	Connection between fixtures	MJCI-EU-5PIN-W-1M	299-1103
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W	299-2100
Mounting Track 20FT	Allows user to install fixtures in a continuous linear position. Packaged in 5 4FT sections in total of 20FT.	MMC-20-TRACK-1-S1-G	299-3200
Mounting Track Connector	Interior track connector	N/A	299-3202
Symmetric Louver 1FT	Symmetric louver for light control	N/A	299-4230
Asymmetric Louver 1FT	Asymmetric louver for light control	N/A	299-4231
Honeycomb Louver 1FT	Honeycomb louver for light control	N/A	299-4232
Blade Louver 1FT	Blade louver for light control	N/A	299-4233