


Client: \_\_\_\_\_ Project Name: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_

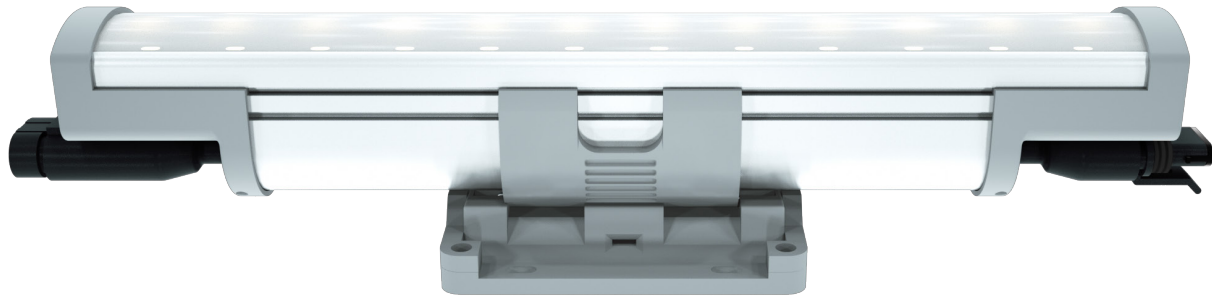

#### Specification Grade Premium Exterior Graze Fixture.

MODA GRAZE Exterior is a patent pending grazer lighting system designed for exterior applications. Utilizing MODA's latest DMX software, our onboard Microprocessor is uniquely programmed in-house with a firmware to receive DMX512 signals for full independent control of every 1ft section. Change the color temperature ranging from 1800K to 3000K and create a variety of moods. With MODA's methods of precision and high standards of work, MODA achieves perfect illumination. Color Rendering Index is at a MODA standard of 90-98. R1 - R15 values are in excess of 90. No striations, no color over angle, and no dark spots.

Wall wash any applications with a choice of 6°, 10°, 25°, 40°, 10°x40°, 30°x60°, or 30°x60°x5° beam patterns for and HO, or 30°x100° for HO+ Lumen packages. 100-277V, 50/60Hz power input allows these fixtures to be installed anywhere in the world. New patent pending locking bracket rotates 180° for a multitude of light directions. Rugged aluminum design. Protected from corrosion and harsh weather conditions by MODA GUARD—a tough seal which protects the fixture. Fast installation is achieved with MODA KWIK CONNECT plugs and install-integral thumb latch connectors. Available in 1ft & 4ft sections. Series is designed for driver or light engine to be factory replaced at its end of life or recycled.

Designed and developed in Las Vegas, USA by MODA.

PAGE

3	FEATURES
4	1 FOOT
5	4 FOOT
6	OPTIC FLEXIBILITY
7	OPTIC FLEXIBILITY CONTINUED
8	DMX WIRING
9	ACCESSORIES: CABLES
10	FIXTURES & ACCESSORIES

PHYSICAL

Dimensions	L: 12 1/2in (318mm)	W: 2 13/16in (71mm)
	L: 47 3/8in (1204mm)	H: 2 9/16in (65mm)
Weight	12in: 1.3lbs (0.6kg) 48in: 4.9lbs (2.22kg)	
Applications	Graze, Accent, & Indirect General Illumination	
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Wet Location IP66	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)	
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)	
Humidity	0-95% Non Condensing	

SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
HO	952 - 1151	3551 - 4155	95 - 125	88 - 122
HO+	987 - 1141	3950 - 4566	98 - 114	98 - 114

POWER CONSUMPTION

	120V - 277V AC	
	1FT	4FT
HO	10W	40W
HO+	10W	40W

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

MAX CONTINUOUS RUN

	120V - 277V AC	
	1FT	4FT
HO	80ft	80ft
HO+	80ft	80ft

OUTPUT

CCT & SDCM	3500K - 6500K 2 Step MacAdam Ellipse
Beam Angle	6°, 10°, 25°, 40°, 10°x40°, 30°x60°, Forward Throw Asymmetric, or 30°x100° optic options
Color Bin Tolerance	Single Bin
CRI	94-98
Lumen Maintenance	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

MODA TECHNOLOGY

moda**SOFTWARE**™

moda**HARDWARE**™

moda**DMX**™

moda**DRIVER**™

moda**ZERO BIN**™

moda**OPTIC**™

moda**LINEAR OPTIC**™

moda**DYNAMIC WARM**™

moda**THERMAL MANAGEMENT**™

moda**GUARD**™

moda**SEAL**™

moda**AIRFLOW**™


moda**COMMUNICATE**™

moda**KWIK CONNECT**™

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	3 Year Limited Warranty

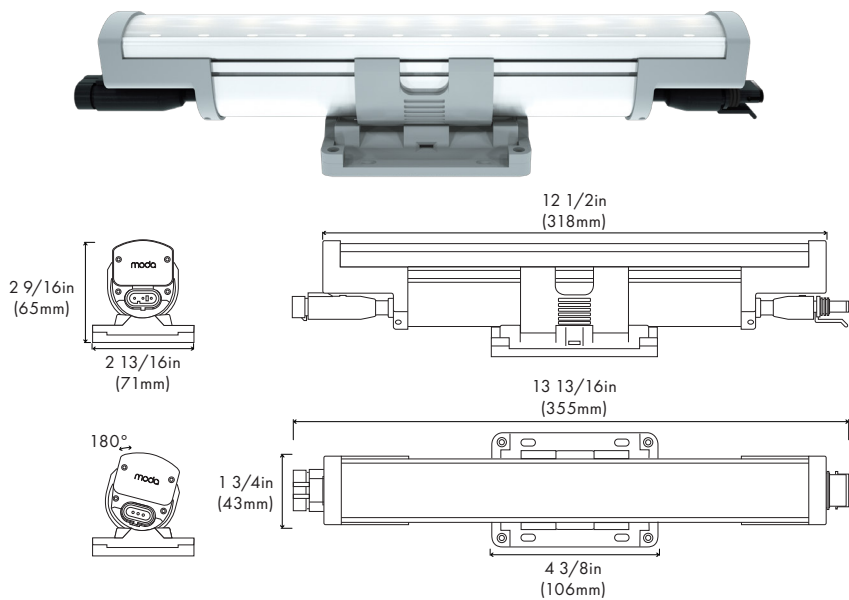

DMX


1FT		6°		10°		25°		40°	
Output	CCT	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	3500K - 6500K	1086.39 -	108.63 -	1074.39 -	107.43 -	1060.39 -	106.03 -	1050.39 -	105.03 -
		1232.54	123.25	1220.54	122.05	1206.54	120.65	1196.54	119.65

1FT		10°x40°		30°x60°		30°x60°X5°	
Output	CCT	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	3500K - 6500K	1041.39 -	104.13 -	1038.39 -	103.83 -	1036.10 -	103.61 -
		1187.54	118.75	1184.54	118.45	1182.54	118.25

1FT		30°x100°		Output		CRI		Power Consumption		Max Run Lengths	
Output	CCT	Lumens	Efficacy	HO		97		120-277V AC 10W		120-277V AC 80ft	
HO+	3500K - 6500K	1035.93 -	103.59 -	HO+		98					
		1197.61	119.76								

BEAM ANGLE

	HO	HO+
6° / 10° / 25° / 40° / 10°x40° / 30°x60°	•	
Forward Throw Asymmetric		
30°x100°		•
	• Available	

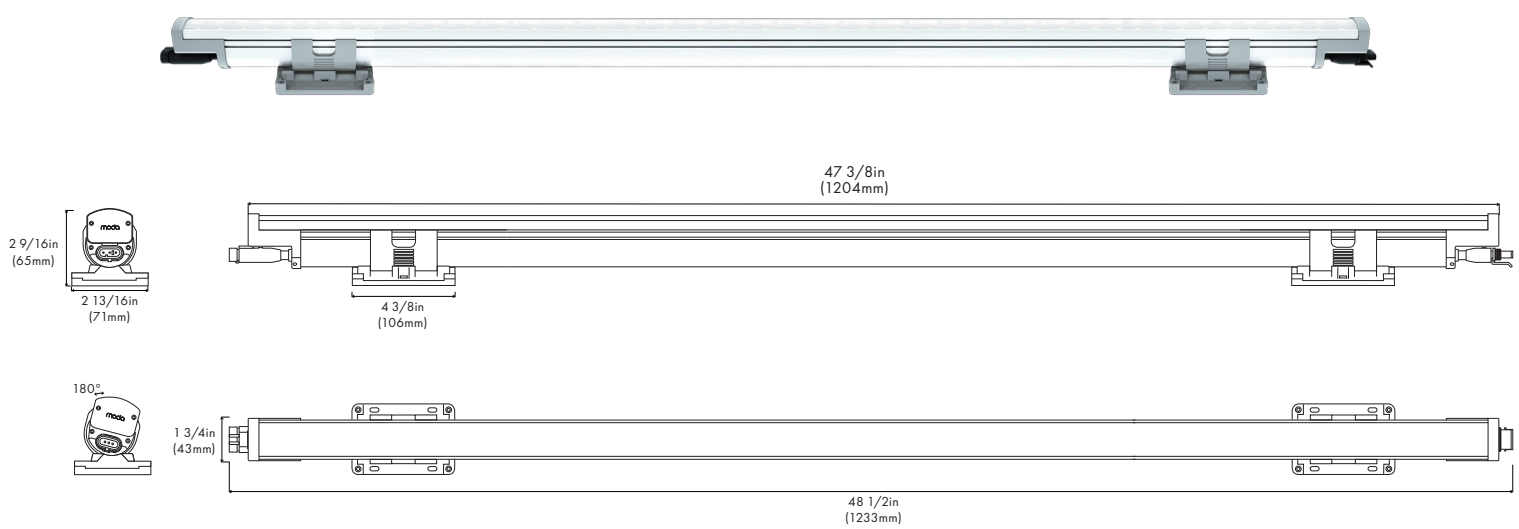

DMX

4FT		6°		10°		25°		40°	
Output	CCT	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	3500K -	4345.56 -	108.63 -	4297.56 -	107.43 -	4241.56 -	106.03 -	4201.56 -	105.03 -
	6500K	4940.16	123.25	4882.16	122.05	4826.16	120.65	4786.16	119.65


4FT		10°x40°		30°x60°		30°x60°X5°	
Output	CCT	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	3500K -	4165.56 -	104.13 -	4153.56 -	103.83 -	4144.44 -	103.61 -
	6500K	4750.16	118.75	4738.16	118.45	4730.16	118.25

4FT		30°x100°		Output	CRI	Power Consumption	Max Run Lengths
Output	CCT	Lumens	Efficacy	HO	97	120-277V AC 40W	120-277V AC 80ft
HO+	3500K -	4143.72 -	103.59 -	HO+	98		
	6500K	4790.44	119.76				


BEAM ANGLE

	HO	HO+
6° / 10° / 25° / 40° / 10°x40° / 30°x60°	•	
Forward Throw Asymmetric		
30°x100°		•
	• Available	

6° Beam Angle

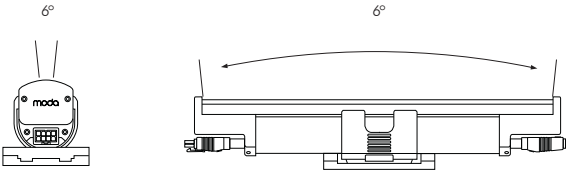

Polar Candela Distribution




Illuminance at a Distance (HO)


	Center Beam FC		Beam Width
	1 Foot	4 Foot	
2.0 ft	52.45 fc	189.23 fc	0.4 ft 0.3 ft
4.0 ft	13.11 fc	47.30 fc	0.8 ft 0.7 ft
6.0 ft	6.55 fc	23.65 fc	1.2 ft 1.1 ft
8.0 ft	3.27 fc	11.82 fc	1.6 ft 1.5 ft
10.0 ft	1.63 fc	5.91 fc	2.1 ft 2.0 ft
12.0 ft	1.31 fc	4.73 fc	2.5 ft 2.4 ft

■ Vert. Spread: 6°      ▲ Horiz. Spread: 6°

10° Beam Angle

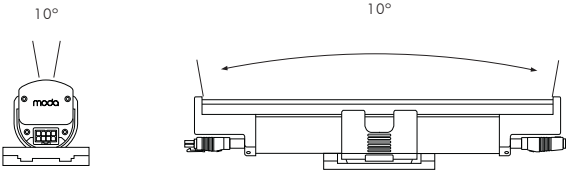

Polar Candela Distribution




Illuminance at a Distance (HO)


	Center Beam FC		Beam Width
	1 Foot	4 Foot	
2.0 ft	49.62 fc	180.47 fc	0.4 ft 0.3 ft
4.0 ft	12.40 fc	45.11 fc	0.8 ft 0.7 ft
6.0 ft	6.20 fc	22.55 fc	1.2 ft 1.1 ft
8.0 ft	3.10 fc	11.27 fc	1.6 ft 1.5 ft
10.0 ft	1.55 fc	5.63 fc	2.1 ft 2.0 ft
12.0 ft	1.24 fc	4.51 fc	2.5 ft 2.4 ft

■ Vert. Spread: 10°      ▲ Horiz. Spread: 10°

25° Beam Angle

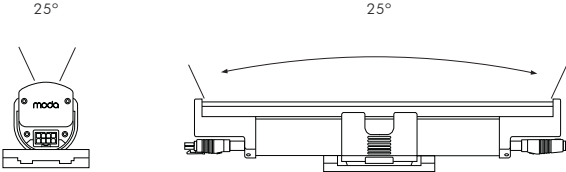

Polar Candela Distribution




Illuminance at a Distance (HO)


	Center Beam FC		Beam Width
	1 Foot	4 Foot	
2.0 ft	30.43 fc	111.67 fc	0.5 ft 0.5 ft
4.0 ft	7.60 fc	27.91 fc	1.0 ft 1.0 ft
6.0 ft	3.80 fc	13.95 fc	1.5 ft 1.6 ft
8.0 ft	1.90 fc	6.97 fc	2.0 ft 2.2 ft
10.0 ft	0.95 fc	3.48 fc	2.5 ft 2.7 ft
12.0 ft	0.76 fc	2.79 fc	3.0 ft 3.2 ft

■ Vert. Spread: 25°      ▲ Horiz. Spread: 25°

40° Beam Angle

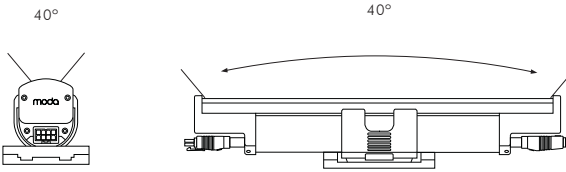

Polar Candela Distribution




Illuminance at a Distance (HO)


	Center Beam FC		Beam Width
	1 Foot	4 Foot	
2.0 ft	13.89 fc	51.30 fc	1.0 ft 0.8 ft
4.0 ft	3.47 fc	12.83 fc	1.9 ft 1.5 ft
6.0 ft	1.73 fc	6.41 fc	2.8 ft 2.4 ft
8.0 ft	0.86 fc	3.21 fc	3.8 ft 3.2 ft
10.0 ft	0.43 fc	1.60 fc	4.8 ft 4.0 ft
12.0 ft	0.34 fc	1.28 fc	5.7 ft 4.7 ft

■ Vert. Spread: 40°      ▲ Horiz. Spread: 40°

10°x40° Beam Angle

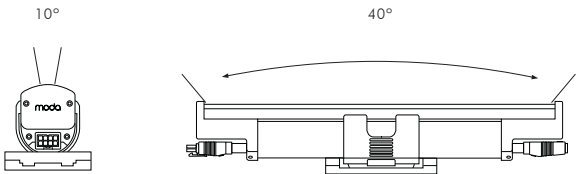

Polar Candela Distribution




Illuminance at a Distance (HO)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	34.70 fc	128.93 fc	0.7 ft	0.5 ft
4.0 ft	8.67 fc	32.23 fc	1.5 ft	1.0 ft
6.0 ft	4.33 fc	16.11 fc	2.2 ft	1.4 ft
8.0 ft	2.16 fc	8.05 fc	3.0 ft	1.9 ft
10.0 ft	1.08 fc	4.02 fc	4.6 ft	2.4 ft
12.0 ft	0.86 fc	3.22 fc	4.4 ft	3.0 ft

■ Vert. Spread: 10°      ▲ Horiz. Spread: 40°

30°x60° Beam Angle

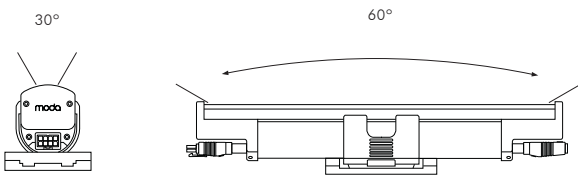

Polar Candela Distribution




Illuminance at a Distance (HO)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	88.27 fc	328.61 fc	1.3 ft	2.0 ft
4.0 ft	22.07 fc	82.15 fc	3.1 ft	4.7 ft
6.0 ft	11.03 fc	41.08 fc	4.0 ft	6.6 ft
8.0 ft	5.52 fc	20.54 fc	5.8 ft	9.3 ft
10.0 ft	2.76 fc	10.27 fc	7.0 ft	11.2 ft
12.0 ft	2.21 fc	8.22 fc	9.0 ft	14.0 ft

■ Vert. Spread: 30°      ▲ Horiz. Spread: 60°

30°x60°x5° Beam Angle

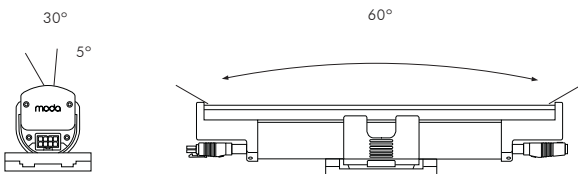

Polar Candela Distribution




Illuminance at a Distance (HO)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	12.79 fc	328.61 fc	1.3 ft	0.3 ft
4.0 ft	3.19 fc	82.15 fc	2.6 ft	0.9 ft
6.0 ft	1.59 fc	41.08 fc	3.9 ft	1.3 ft
8.0 ft	0.79 fc	20.54 fc	5.2 ft	1.6 ft
10.0 ft	0.39 fc	10.27 fc	6.5 ft	1.9 ft
12.0 ft	0.31 fc	8.22 fc	7.87 ft	2.6 ft

■ Vert. Spread: 30°      ▲ Horiz. Spread: 60°

30°x100° Beam Angle

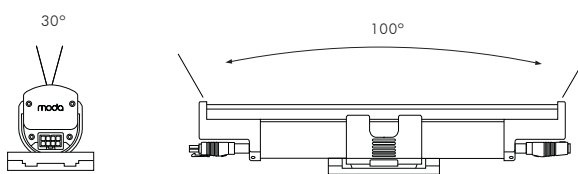


Polar Candela Distribution (HO+)



Illuminance at a Distance (HO+)

	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	105.71 fc	422.84 fc	1.3 ft	2.0 ft
4.0 ft	26.42 fc	105.71 fc	3.1 ft	4.2 ft
6.0 ft	13.21 fc	52.85 fc	4.0 ft	6.6 ft
8.0 ft	6.60 fc	26.42 fc	5.8 ft	9.3 ft
10.0 ft	3.30 fc	13.21 fc	7.0 ft	11.2 ft
12.0 ft	2.64 fc	10.57 fc	9.0 ft	14.0 ft



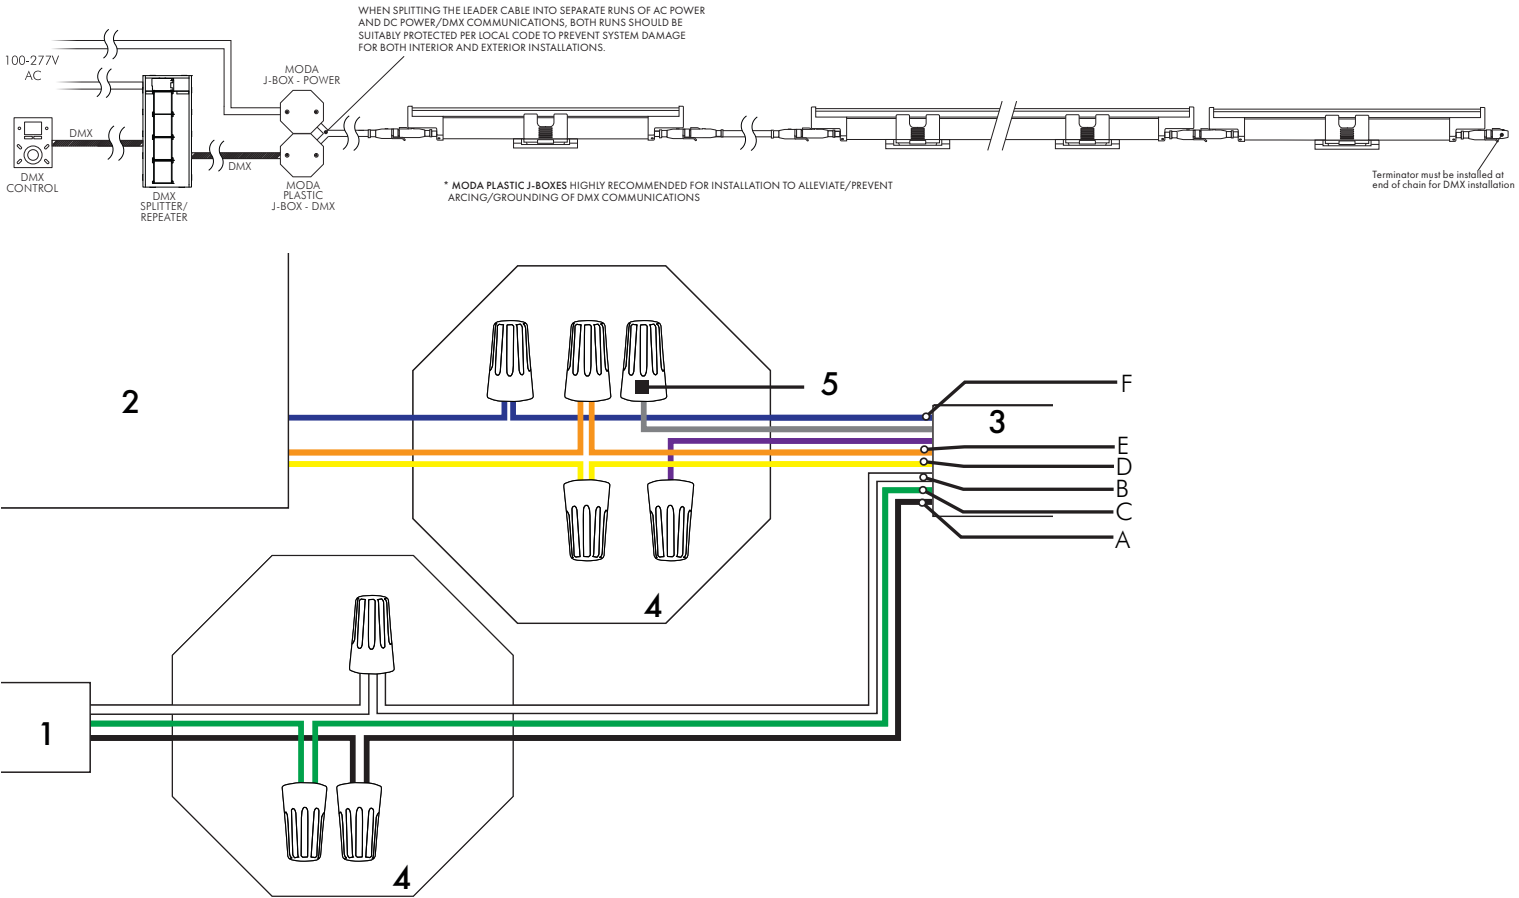









■ Vert. Spread: 30°      ▲ Horiz. Spread: 100°



Wiring Legend

- 1 Power 100-277V AC
- 2 DMX Splitter/Repeater
- 3 8 Pin Leader Cable
- 4 Junction Box
- 5 Wiring Nuts



8 Pin Leader Cable

		UL/cUL	CE/CCC*
A	100-277V AC	 Black	 Brown
B	Neutral	 White	 Blue
C	Ground	 Green	 Green/Yellow
D	Data Positive/DC+	 Orange	 Orange
E	Data Negative/DC-	 Yellow	 Yellow
F	DMX Shield	 Dark Blue	 Dark Blue



\*Not illustrated

DMX Connectors


Female



Male



Angle Adjustment







DMX LEADER CABLES

Moda Cove Exterior 8 Pin Leader Cables

	UL/cUL	EU/CCC
Lengths	25ft and 50ft	10m and 15m
Color	Black	Black

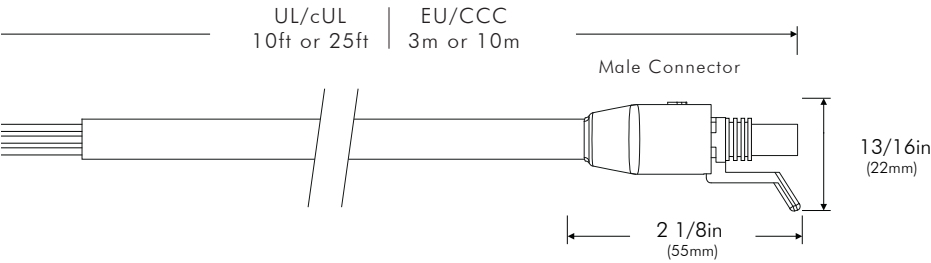


Connectors

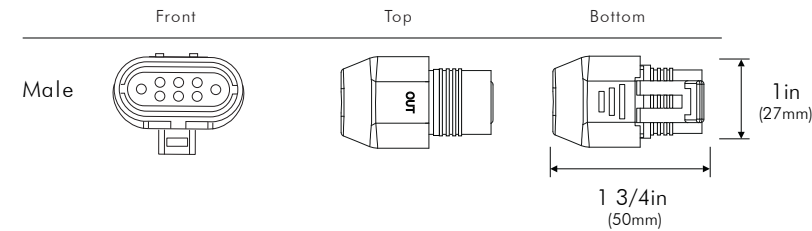


DMX JUMPER CABLES

Moda Cove Exterior 8 Pin Jumper Cables


	UL/cUL	EU/CCC
Lengths	1ft and 4ft	300mm and 1m
Color	Black	Black

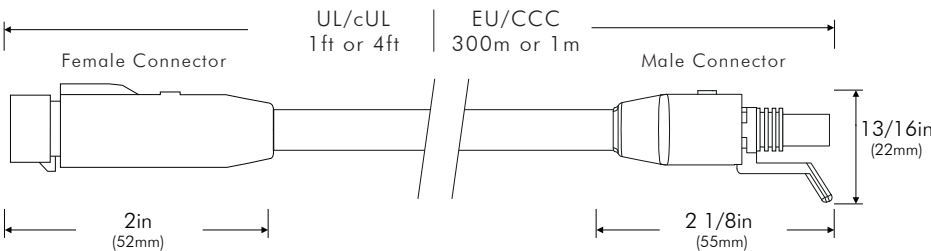

Connectors

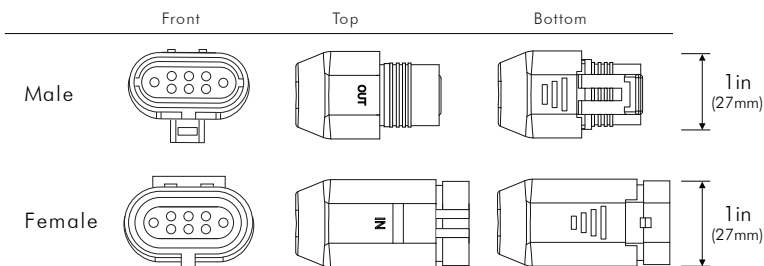


Pin Assignment




	UL/cUL	EU/CCC
1 Live 100-277V	Black	Brown
2 Neutral	White	Blue
3 Ground	Green	Green/Yellow
4 DMX Positive	Orange	Orange
5 DMX Negative	Yellow	Yellow

Pin Assignment



	UL/cUL	EU/CCC
1 Live 100-277V	Black	Brown
2 Neutral	White	Blue
3 Ground	Green	Green/Yellow
4 DMX Positive	Orange	Orange
5 DMX Negative	Yellow	Yellow



	UL/cUL	EU/CCC
1 Live 100-277V	Black	Brown
2 Neutral	White	Blue
3 Ground	Green	Green/Yellow
4 DMX Positive	Orange	Orange
5 DMX Negative	Yellow	Yellow

MGE - - S1 - DC - -  
A B C D E F  
COMPLETE SKU SAMPLE: MGE-HO-S1-DC-4-25

**A - FIXTURE & LOCATION**

MGE — Moda Graze Exterior

**B - LIGHT OUTPUT**

HO — High Output  
HO+ — High Output Plus

**C - SERIES NUMBER**

S1 — Series 1

**D - LED COLOR**

DC — Dynamic Cool

\* - Available only in HO \*\* - Available only in HO+

**E - LENGTH**

1 — 1FT  
4 — 4FT

**G - OPTIC**

6\* — 6° x 6°  
10\* — 10° x 10°  
25\* — 25° x 25°  
40\* — 40° x 40°  
140\* — 10° x 40°  
360\* — 30° x 60°  
365\* — Forward Throw Asymmetric  
310\*\* — 30° x 100°

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 8 Pin 10FT	Power to first fixture of run	MLCE-US-8PIN-B-10FT
Leader Cable US 8 Pin 25FT	Power to first fixture of run	MLCE-US-8PIN-B-25FT
Jumper Cable US 8 Pin 1FT	Connection between fixtures	MJCE-US-8PIN-B-1FT
Jumper Cable US 8 Pin 4FT	Connection between fixtures	MJCE-US-8PIN-B-4FT
Leader Cable EU 8 Pin 3M	Power to first fixture of run	MLCE-EU-8PIN-B-3M
Leader Cable EU 8 Pin 10M	Power to first fixture of run	MLCE-EU-8PIN-B-10M
Jumper Cable EU 8 Pin 300MM	Connection between fixtures	MJCE-EU-8PIN-B-300MM
Jumper Cable EU 8 Pin 1M	Connection between fixtures	MJCE-EU-8PIN-B-1M
Terminator 8 Pin	Must be fixed to last fixture for safety	MTE-8PIN-B
Exterior Bracket Lock	Holds fixture in place for vertical installation	MCGE-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
Kandi Touch	DMX512 Wall Mounted Touch Panel Controller with Color Display	KND-TCH-B (Black)	250-0040
		KND-TCH-W (White)	250-0041
MODA Touch*	DMX512 Wall Mounted Touch Panel Controller	MTCH-S1-B (Black)	MTCH-S1-B
		MTCH-S1-W (White)	MTCH-S1-W

\* - MODA Touch default scene addressing can be found on MODA Touch Product Documentation and DMX Fixture Installation Guides.

CONTROL ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Pathway DMX Splitter/Repeater	Wall-mount, 4 ports, E1.20 RDM Compliant, Small - 10in X 13in X 4 1/2in	PWREP WM P4 TERM RDM SML DMX-RDM	250-0153
Pathway DMX Splitter/Repeater	Wall-mount, 8 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P8 TERM RDM MED DMX-RDM	250-0154
Pathway DMX Splitter/Repeater	Wall-mount, 12 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P12 TERM RDM MED DMX-RDM	250-0155
Shielded Cable 500FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-500FT	250-0251
Shielded Cable 1000FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-1000FT	250-0252