



Client: _____ Project Name: _____
 MODA Contact: _____ E-Mail: _____
 Type: _____ PO #: _____ Quantity: _____
 Notes: _____



Miniature Line Voltage GRAZE Color Fixture.

MODA MINI GRAZE COLOR INTERIOR is an award winning, patented, miniature line voltage cove lighting system. Now available in mono static colors, these unique colors can enhance any environment. For projects which require a unique static color the only way to achieve this is by mixing red, green and blue colors with DMX512 controls, DMX512 enabled fixtures, DMX wiring and time to program the specific color required. All of this has a cost. This is now eliminated by choosing MODA MINI Graze Color. No longer do you have to worry about the red die degrading faster than green and blue dies, hence having a shift over time with the specific color the designer has chosen. Enjoy worry free simple color specific fixtures. Easy 3 wire connections for on/off or ELV dimming control, or standard 5 wire for 0-10V installations. This drastically reduces installation time and cost. Choose from Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Dark Blue, Dark Orange, Dark Red, or Turquoise. If a project requires a custom color, we are able to create that color in our laboratory with our own ability to mix proprietary MODA Phosphor to create virtually any color required.

Unlike other fixtures which are much larger in physical size, MINI GRAZE utilizes the latest Advanced MODA Design and Electronic Engineering, ensuring fixtures are cool to the touch. This is achieved by designing a forward thinking fixture with intelligent driver technology and by under driving the most advanced LEDs in the world, creating a fixture which is so cool it can be held after days of illumination. The L70 (longevity) of the fixture is extended and phosphor degradation is kept to a minimum.

The Onboard American Dimming Chipset, programmed by our MODA Software Division with new Advanced Firmware, enables MINI GRAZE to deliver smooth, no noise, flicker-free and synchronized dimming down to 0% with ELV or 0-10V Dimmers. Choose from either ELV or 0-10V direct dimming fixtures. Unlike other fixtures in the marketplace there is no need to purchase additional adapters, converters, dimming boxes or control modules. Just use conventional wiring direct from the dimmer to create a powerful lighting system, saving time and money. Link any combination of 1ft and 4ft fixtures and every fixture will dim together smoothly, synchronized from 100% to 0%. With no minimum run lengths, just one 1ft fixture will dim seamlessly to 0%.

With MINI GRAZE the installer is able to achieve long single runs of up to 240 feet decreasing the number of wiring circuits required in an installation. Another step forward in this category of small sized fixtures is the universal power input. We designed a small MODA Micro Driver specific for MINI GRAZE enabling it to accept 100-277V AC 50/60 Hz, thus decreasing the number of SKUs needed to be held by any of our worldwide distributors and giving the installer a choice of power inputs from one fixture.

A specialized curved polymer optical lens combined with a cleverly designed Light Chamber delivers a light bending, smooth 30° X 100° beam pattern perfect for cove installations with no color over angle, no striations, interlocking fields of light and no dark spots.

The fixture incorporates an integral, patented, toolless, self-locking bracket which slides into any position and turns 170 degrees. Built-in male & female connectors with thumb latch connections for fast installation time. Lightweight aluminum construction for durability and excellent thermal characteristics. Quality American made electronic components. 1ft and 4ft lengths are for fast installation saving expensive labor installation costs and achieving long runs of quality illumination in rapid time.

Tested by Intertek to UL1598 for use in USA & Canada. CE Approved. WEE. RoHS Compliant. TM-30-15 Tested. US Patent No. D787,112 and D783,890.

Product Innovation Award (PIA) Winner 2016 for Best Luminaire. LFI Innovation Award 2017 Finalist for Dynamic Color, Theatrical, Cove, Strips and Tape. Lux Award Commended for Interior Product of the Year 2016. Darc Awards Finalist for Best Architectural Lighting Product - Interior Luminaires 2016. International Design Excellence Award for Innovative Product Design Finalist 2016.

Designed & Developed by MODA LIGHT in Las Vegas, USA.

PAGE

3	FEATURES
4	6 INCH
5	6 INCH POLAR CANDELA
6	6 INCH ILLUMINANCE AT DISTANCE
7	1 FOOT
8	1 FOOT SO POLAR CANDELA
9	1 FOOT HO POLAR CANDELA
10	1 FOOT SO ILLUMINANCE AT A DISTANCE
11	1 FOOT HO ILLUMINANCE AT A DISTANCE
12	4 FOOT
13	4 FOOT SO POLAR CANDELA
14	4 FOOT HO POLAR CANDELA
15	4 FOOT SO ILLUMINANCE AT DISTANCE
16	4 FOOT HO ILLUMINANCE AT DISTANCE
17	CHROMATICITY
18	ELV WIRING
19	GRAZING
20	0-10V TO ELV
21	ACCESSORIES: MOUNTING TRACK
22	ACCESSORIES: ASYMMETRIC LOUVERS
23	ACCESSORIES: SYMMETRIC LOUVERS
24	ACCESSORIES: HONEYCOMB LOUVERS
25	ACCESSORIES: BLADE LOUVERS
26	ACCESSORIES: CABLES
27	FIXTURES & ACCESSORIES
28	FIXTURES & ACCESSORIES
29	FIXTURES & ACCESSORIES

PHYSICAL

Dimensions	L: 6 5/16in (160mm) L: 12in (304mm) L: 48in (1219mm)	W: 1 13/16in (46mm) H: 1 3/16in (30mm)
Weights	6in: 0.21 lbs (0.10 kg) / 1ft: 0.38 lbs (0.17kg) 4ft: 1.22 lbs (0.55 kg)	
Applications	Graze, Accent & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	MODA Aluminum Heat Sink	
Beam Angle	30° x 100°	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

OUTPUT

Colors	Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Turquoise, Dark Blue, Dark Orange, and Dark Red available
Color Bin Tolerance	Zero Bin
CRI	N/A
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

DIMMING

Outputs Available	
6IN	SO Only
1FT	SO, HO
4FT	SO, HO

MODA TECHNOLOGY

modaSOFTWARE™

modaHARDWARE™

modaDIM™

modaLED™

modaMICRO DRIVER™

modaPHOSPHOR™

modaZERO BIN™

modaTHERMAL MANAGEMENT™

modaHIGH CRI™

modaAIRFLOW™

modaCOLOR RENDITION™

modaLOCK™

modaKLIK CONNECT™

modaLINEAR OPTIC™

STANDARDS & CERTIFICATIONS



RoHS ✓




Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.

Class

1

Warranty

5 Year Limited Warranty

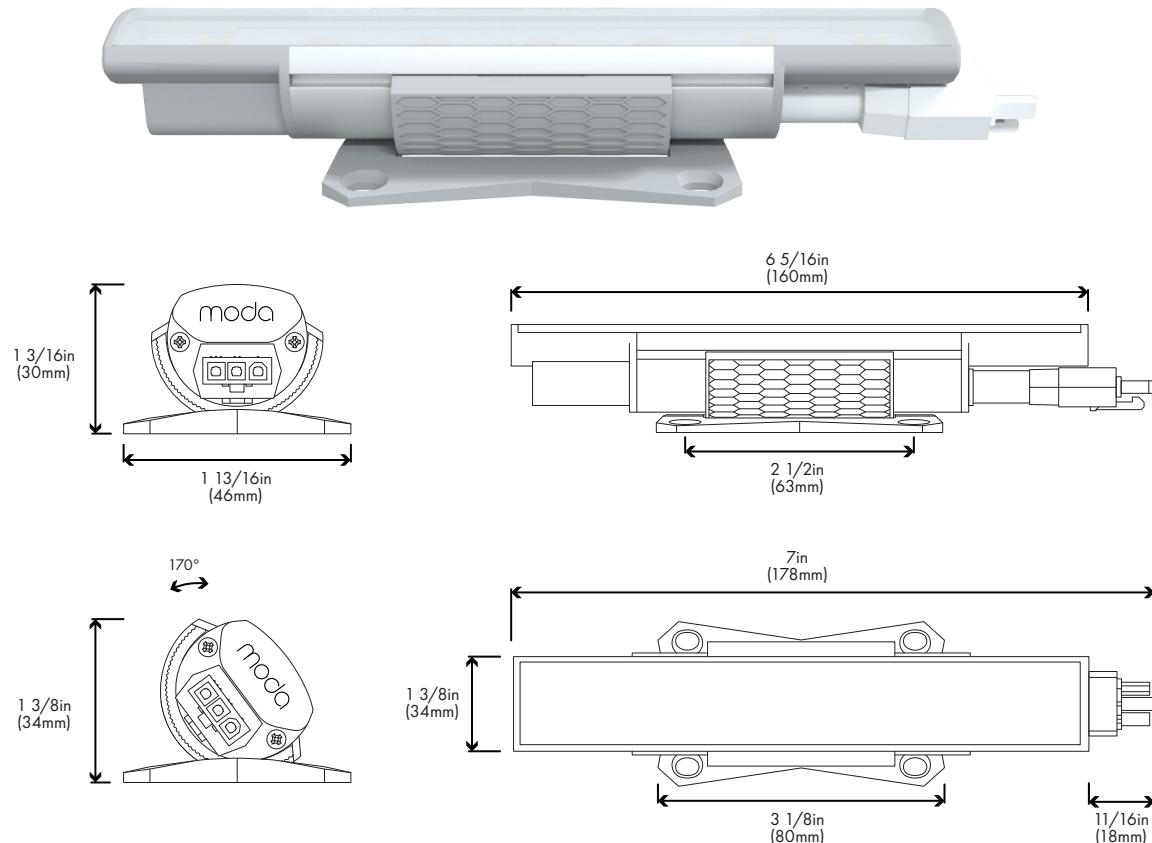

ELV

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	168	36	31	29
Green	196	42	36	34
Blue	140	30	25	24
Amber	234	50	43	40
Yellow	215	46	39	37
Golden Yellow	509	108	93	88
Ice Blue	429	91	78	74
Cyan	169	36	31	29
Light Green	490	104	89	84
Pink	200	43	36	34
Violet	194	41	35	33
Turquoise	168	36	31	29
Dark Blue	84	18	15	14
Dark Orange	420	89	76	72
Dark Red	39	9	6	6


SO Power Consumption SO Max Continuous Run*

120V	5W	120V AC	120ft
240V	6.5W	240V AC	240ft
277V	6.5W	277V AC	240ft


Each connection uses 0.1mA power for SO and 0.2mA for HO. Please check chosen dimmer for any mA restriction (i.e., 50mA restriction = maximum 500 connections for SO and 250 for HO).

STANDARD OUTPUT


SO Red

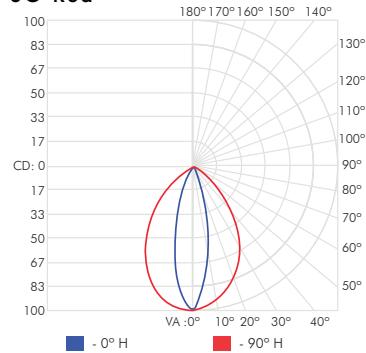


SO Green

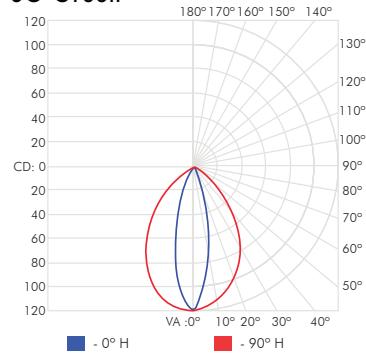


SO Blue

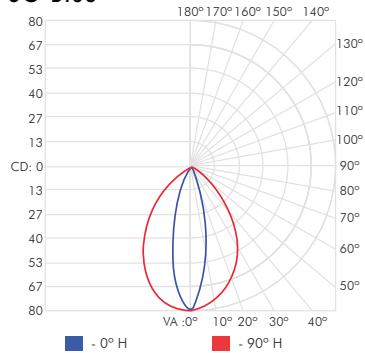


SO Amber

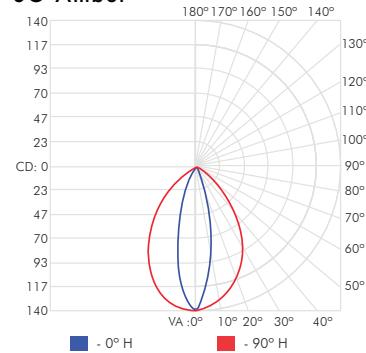


SO Yellow

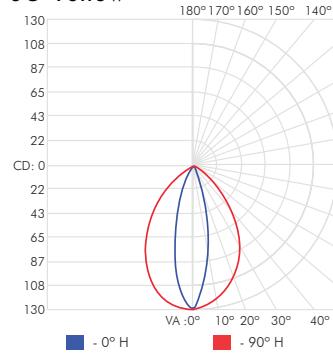


SO Golden Yellow

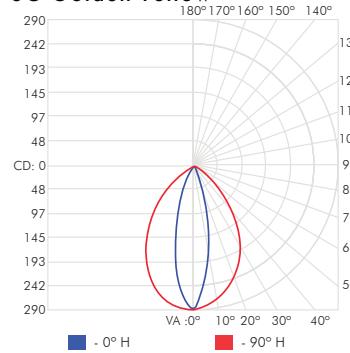


SO Ice Blue

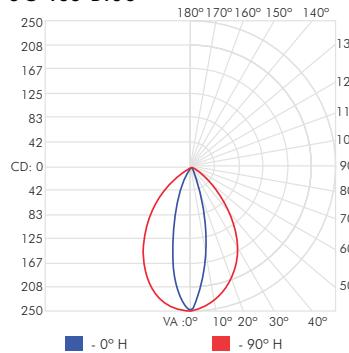


SO Cyan

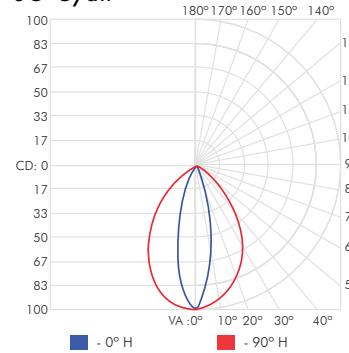


SO Light Green

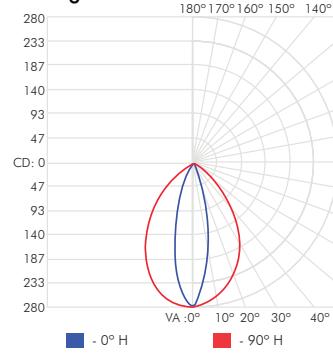


SO Pink

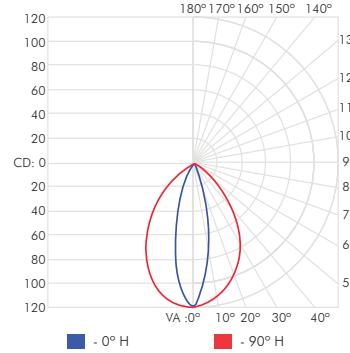


SO Violet

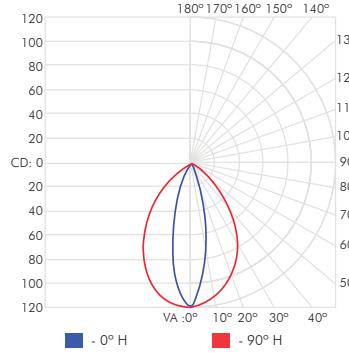


SO Turquoise

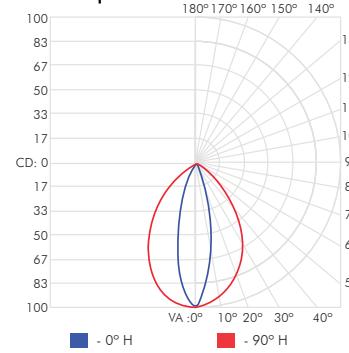


SO Dark Blue

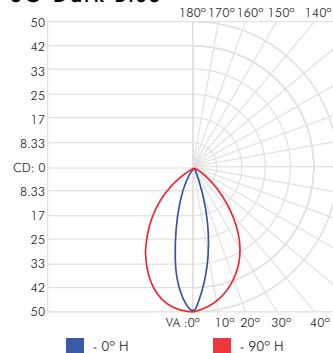

SO Dark Orange

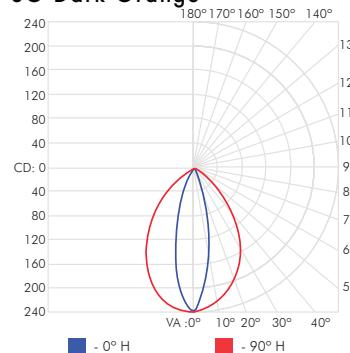


SO Dark Red

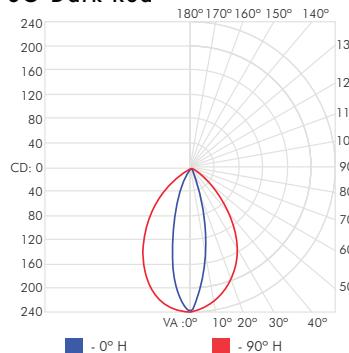


STANDARD OUTPUT


SO Red

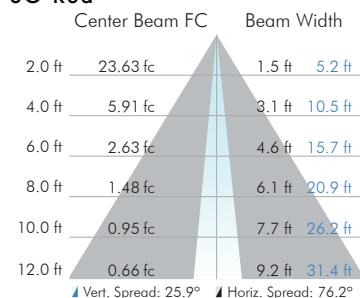


SO Green

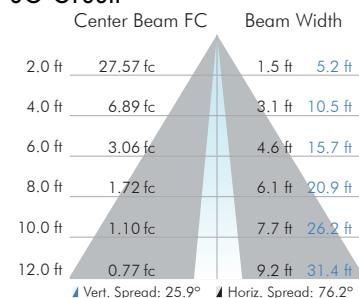


SO Blue

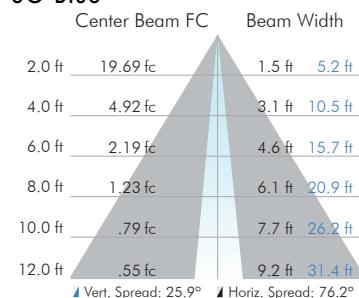


SO Amber

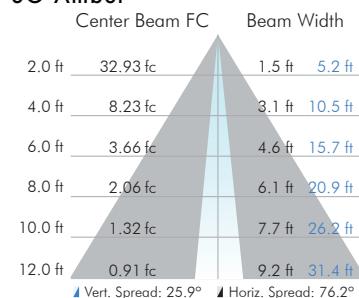


SO Yellow

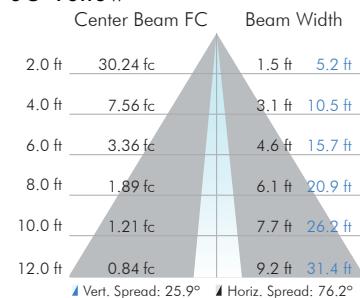


SO Golden Yellow

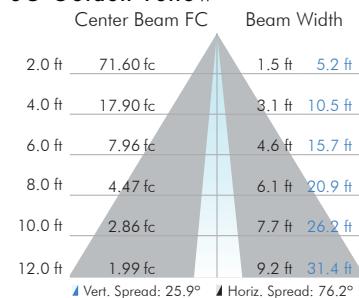


SO Ice Blue

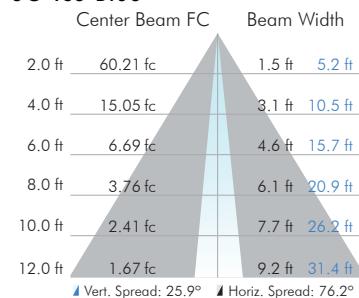


SO Cyan

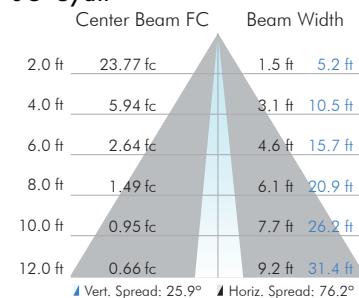


SO Light Green

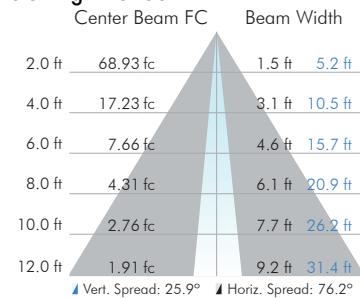


SO Pink

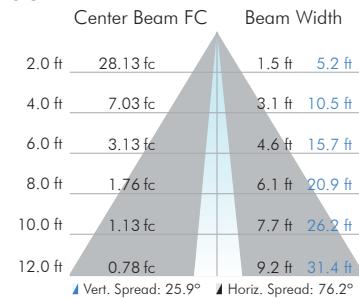


SO Violet

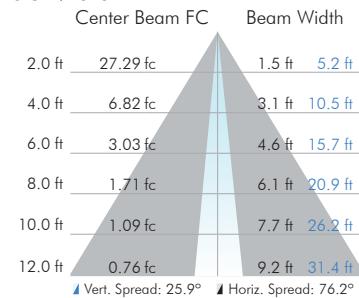


SO Turquoise

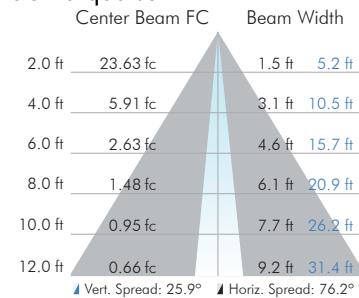


SO Dark Blue

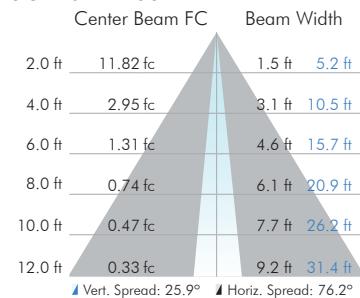


SO Dark Orange

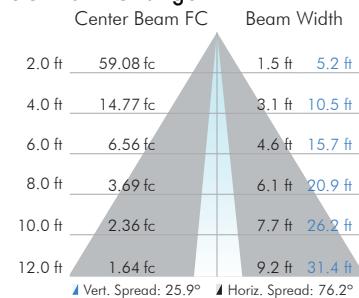

SO Dark Red

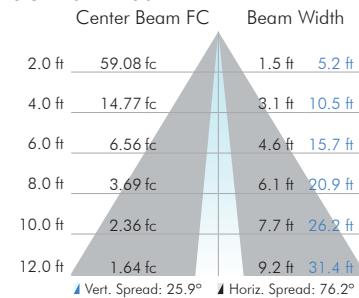

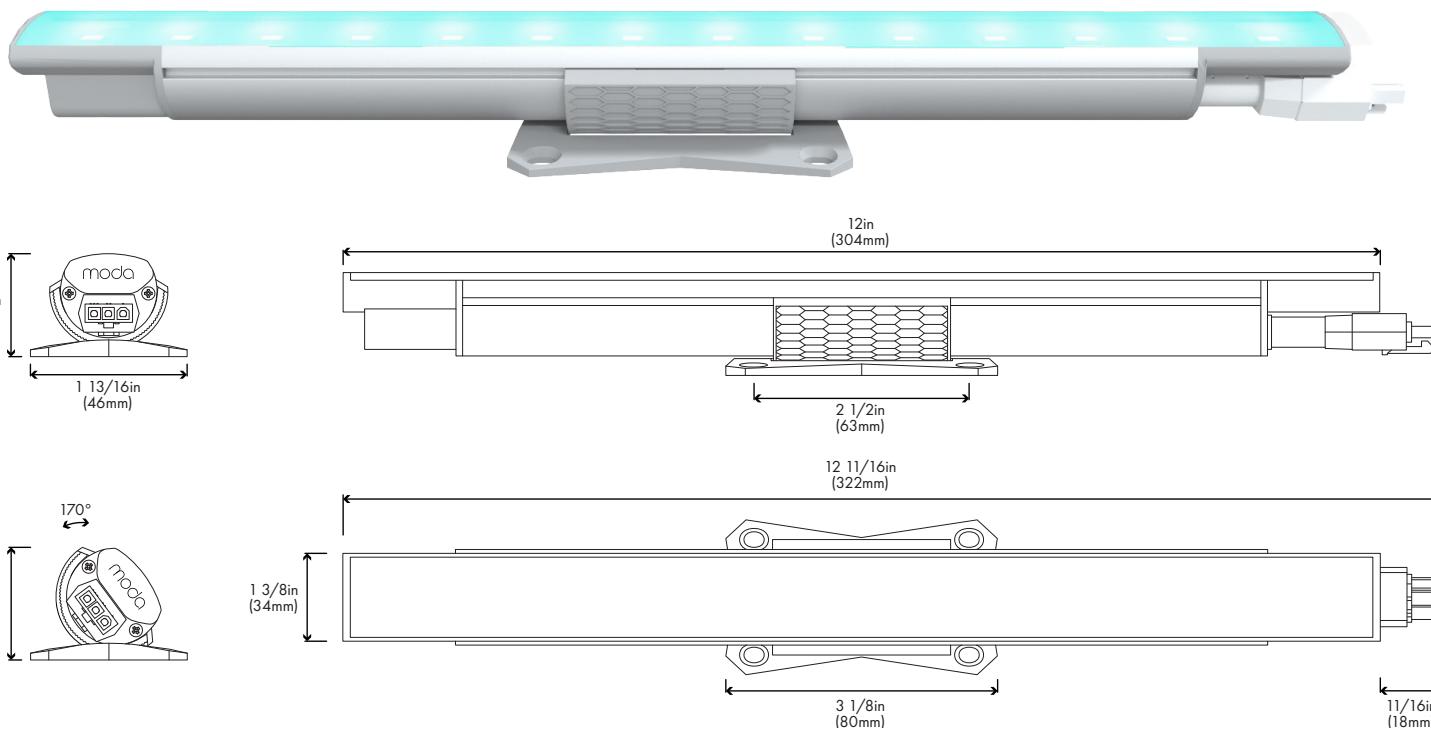

ELV

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	168	36	31	29
Green	196	42	36	34
Blue	140	30	25	24
Amber	234	50	43	40
Yellow	215	46	39	37
Golden Yellow	509	108	93	88
Ice Blue	429	91	78	74
Cyan	169	36	31	29
Light Green	490	104	89	84
Pink	200	43	36	34
Violet	194	41	35	33
Turquoise	168	36	31	29
Dark Blue	84	18	15	14
Dark Orange	420	89	76	72
Dark Red	39	9	6	6

SO Power Consumption SO Max Continuous Run*

120V	5W	120V AC	120ft
240V	6.5W	240V AC	240ft
277V	6.5W	277V AC	240ft

Each connection uses 0.1mA power for SO and 0.2mA for HO. Please check chosen dimmer for any mA restriction (i.e., 50mA restriction = maximum 500 connections for SO and 250 for HO).

Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.


High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	336	36	34	34
Green	395	42	40	40
Blue	286	30	29	29
Amber	464	49	47	46
Yellow	430	46	43	43
Golden Yellow	1015	108	103	102
Ice Blue	858	91	87	86
Cyan	338	36	34	34
Light Green	980	104	99	98
Pink	402	43	41	40
Violet	388	41	39	39
Turquoise	341	36	34	34
Dark Blue	168	50	47	47
Dark Orange	840	89	85	84
Dark Red	78	18	12	12

HO Power Consumption HO Max Continuous Run*


120V	10W	120V AC	50ft
240V	13W	240V AC	100ft
277V	13W	277V AC	100ft

STANDARD OUTPUT


SO Red

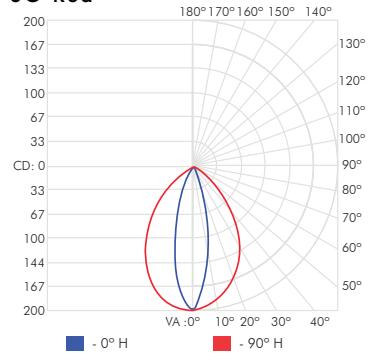


SO Green

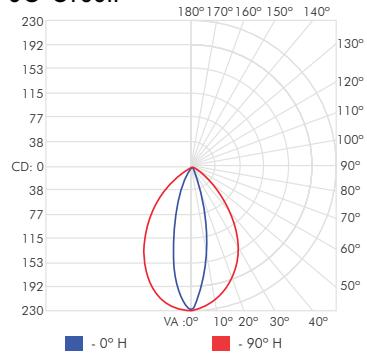


SO Blue

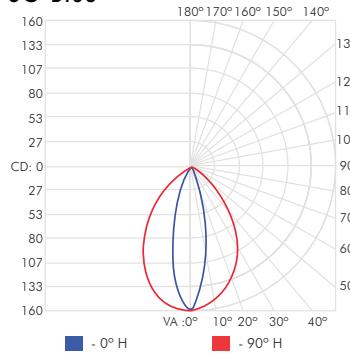


SO Amber

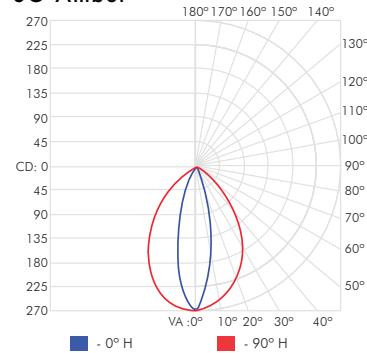


SO Yellow

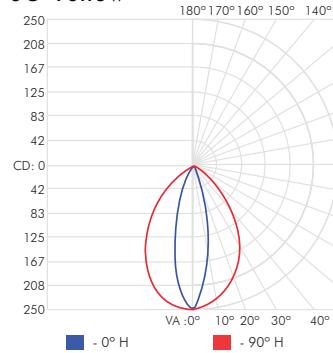


SO Golden Yellow

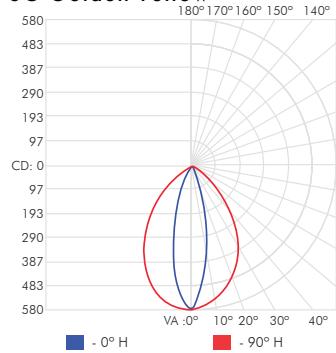


SO Ice Blue

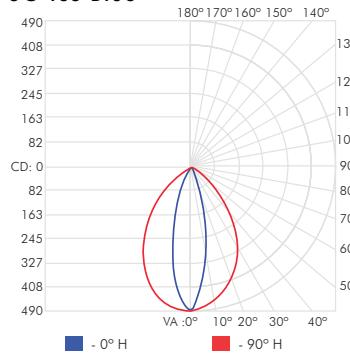


SO Cyan

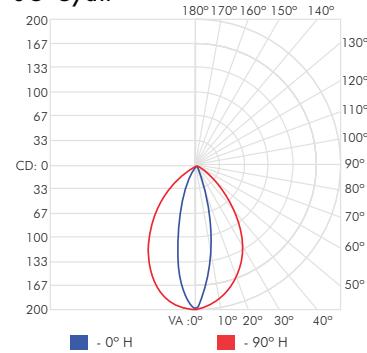


SO Light Green

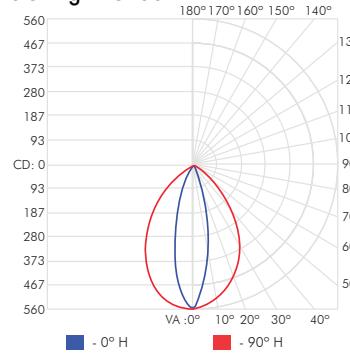


SO Pink

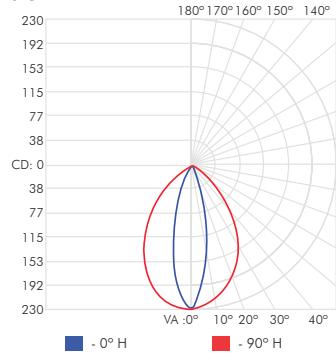


SO Violet

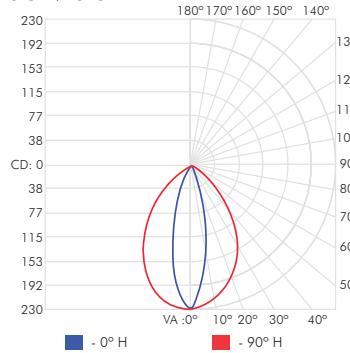


SO Turquoise

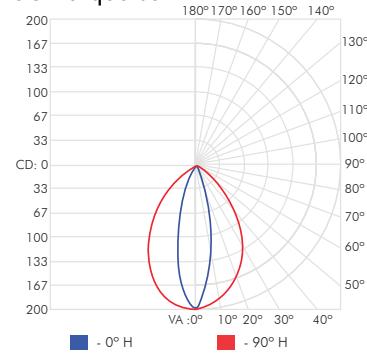


SO Dark Blue

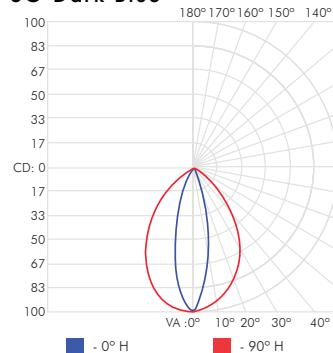

SO Dark Orange

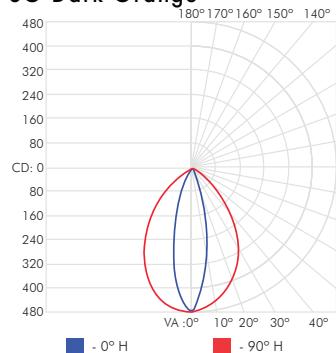


SO Dark Red

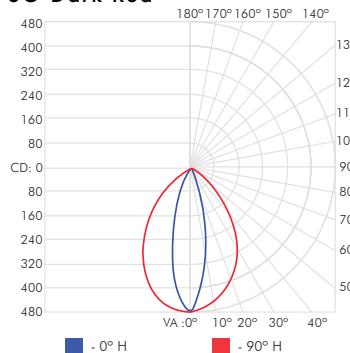


HIGH OUTPUT


HO Red

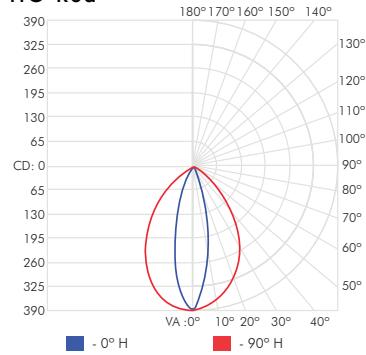


HO Green

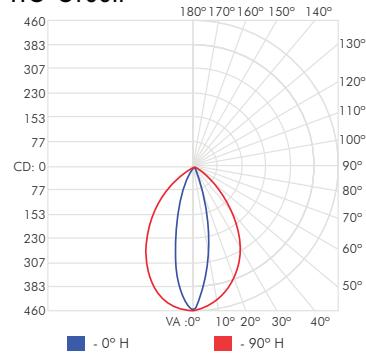


HO Blue

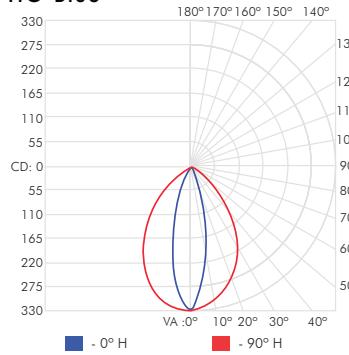


HO Amber

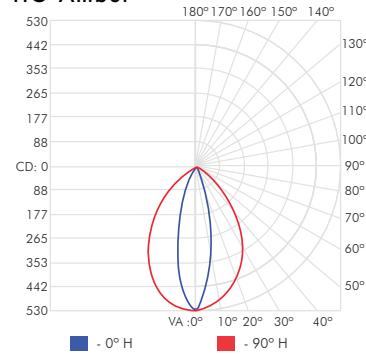


HO Yellow

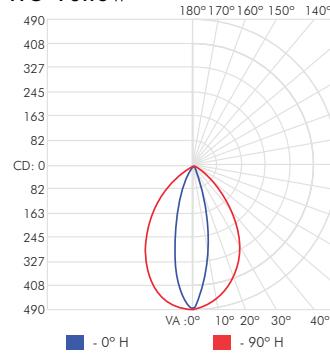


HO Golden Yellow

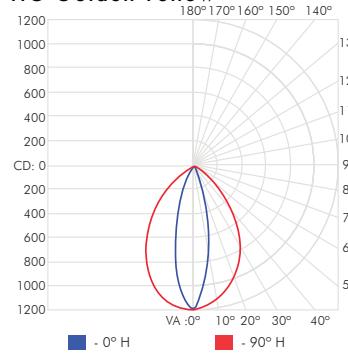


HO Ice Blue

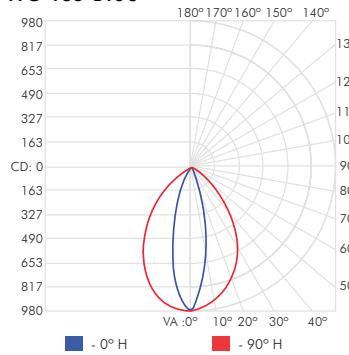


HO Cyan

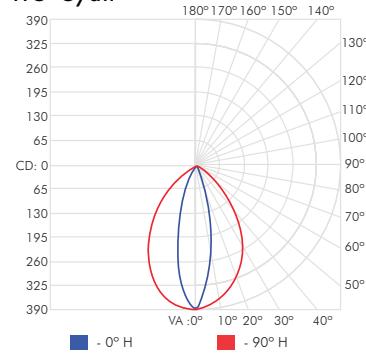


HO Light Green

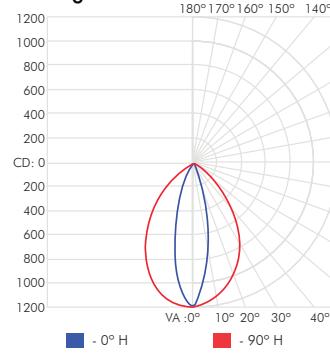


HO Pink

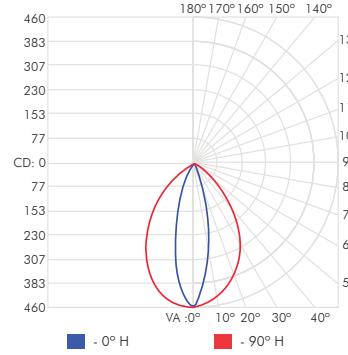


HO Violet

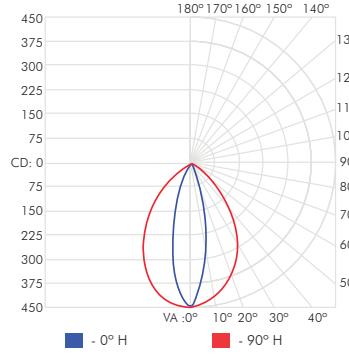


HO Turquoise

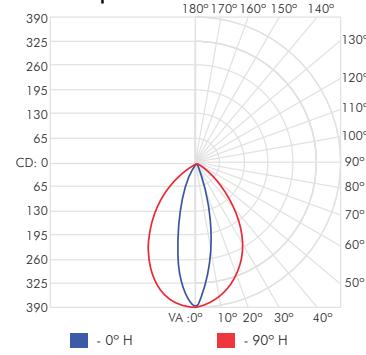


HO Dark Blue

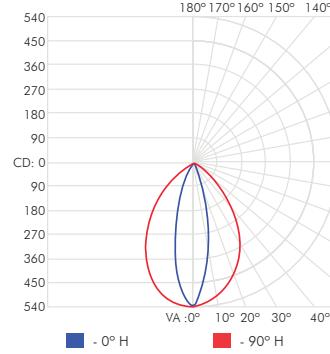

HO Dark Orange

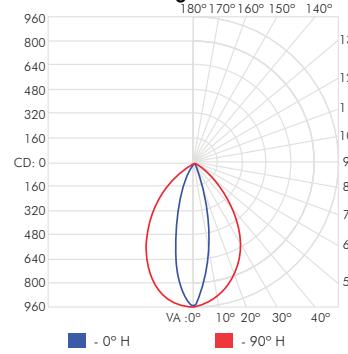


HO Dark Red

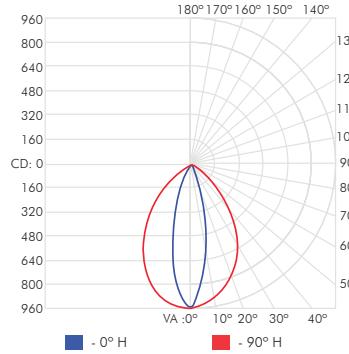


STANDARD OUTPUT


SO Red




SO Green




SO Blue




SO Amber




SO Yellow




SO Golden Yellow




SO Ice Blue




SO Cyan




SO Light Green




SO Pink




SO Violet




SO Turquoise




SO Dark Blue



SO Dark Orange




SO Dark Red




HIGH OUTPUT


HO Red




HO Green




HO Blue




HO Amber




HO Yellow

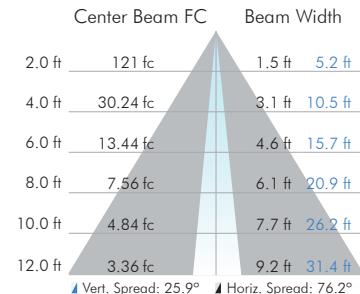


HO Golden Yellow




HO Ice Blue




HO Cyan




HO Light Green

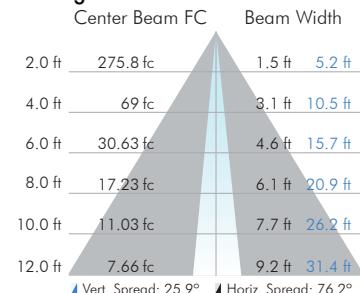


HO Pink




HO Violet




HO Turquoise




HO Dark Blue

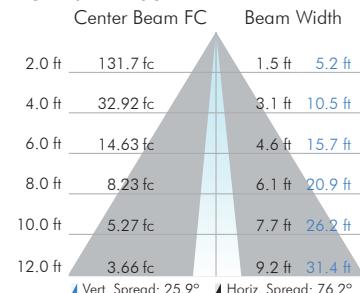


HO Dark Orange



HO Dark Red



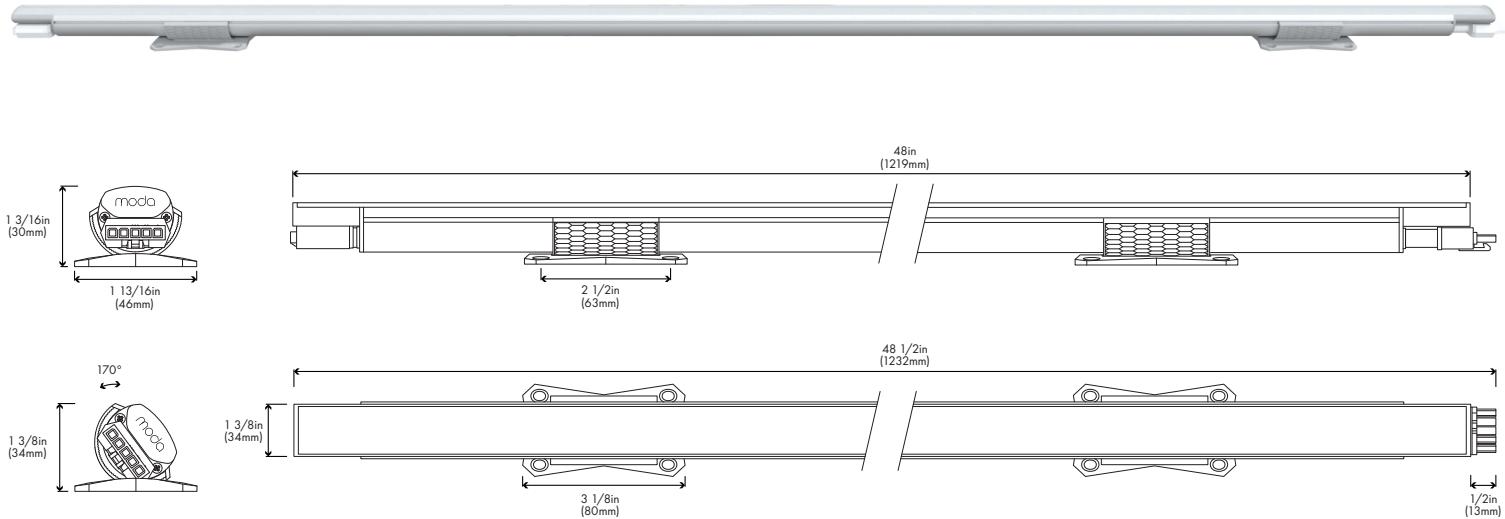

0-10V

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	672	38	35	34
Green	784	44	41	40
Blue	560	32	29	29
Amber	936	53	48	48
Yellow	860	49	45	44
Golden Yellow	2036	115	105	104
Ice Blue	1716	97	89	88
Cyan	676	38	35	35
Light Green	1960	111	102	101
Pink	800	45	41	41
Violet	776	44	40	40
Turquoise	672	38	35	34
Dark Blue	336	19	17	17
Dark Orange	1680	95	87	86
Dark Red	156	36	24	24

SO Power Consumption

120V	19W
240V	20W
277V	20W

SO Max Continuous Run*

120V AC	120 ft
240V AC	240 ft
277V AC	240 ft

Each connection uses 0.1mA power for SO and 0.2mA for HO. Please check chosen dimmer for any mA restriction (i.e., 50mA restriction = maximum 500 connections for SO and 250 for HO).

High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	1344	36	35	34
Green	1568	42	41	40
Blue	1120	30	29	29
Amber	1872	51	49	48
Yellow	1720	46	45	44
Golden Yellow	4072	110	107	104
Ice Blue	3432	93	90	88
Cyan	1352	37	36	35
Light Green	3920	106	103	101
Pink	1600	43	42	41
Violet	1552	42	41	40
Turquoise	1348	36	35	35
Dark Blue	672	51	49	48
Dark Orange	3360	91	88	86
Dark Red	312	72	48	48

HO Power Consumption


120V	40W
240V	52W
277V	52W

HO Max Continuous Run*


120V AC	50 ft
240V AC	100 ft
277V AC	100 ft

STANDARD OUTPUT


SO Red

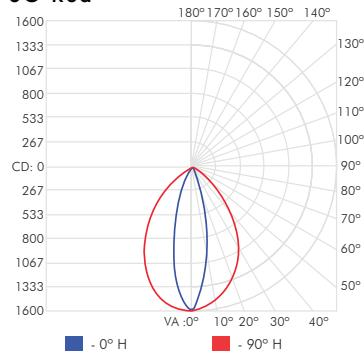


SO Green

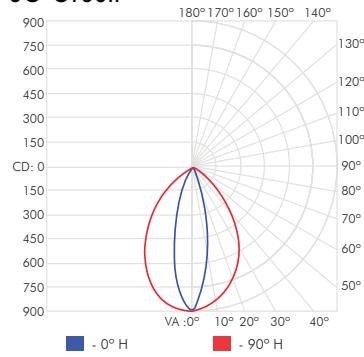


SO Blue

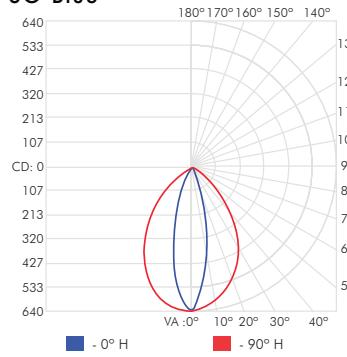


SO Amber

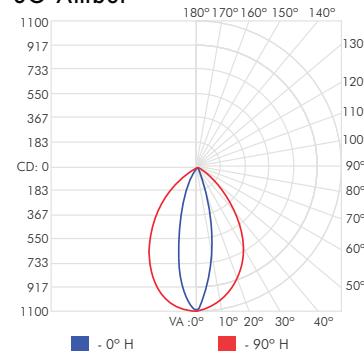


SO Yellow

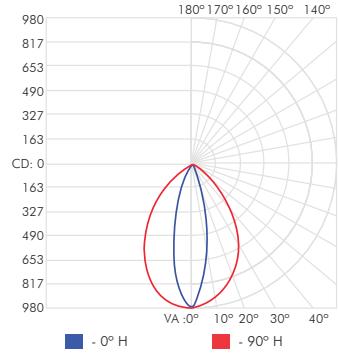


SO Golden Yellow

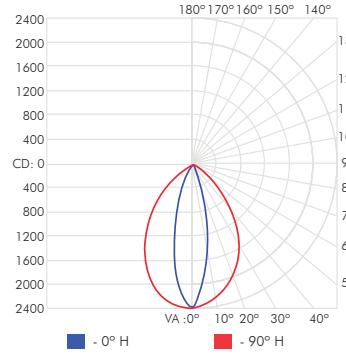


SO Ice Blue

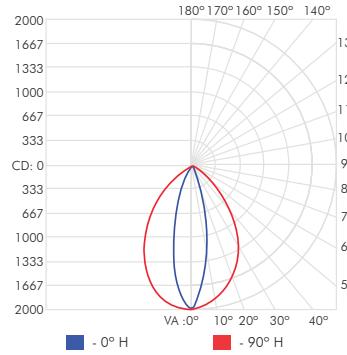


SO Cyan

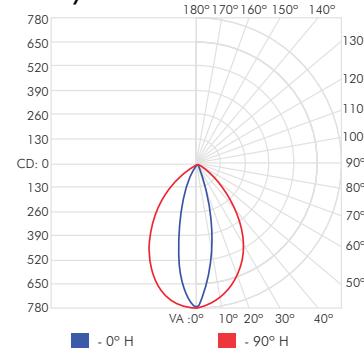


SO Light Green

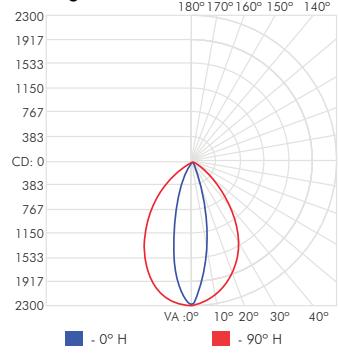


SO Pink

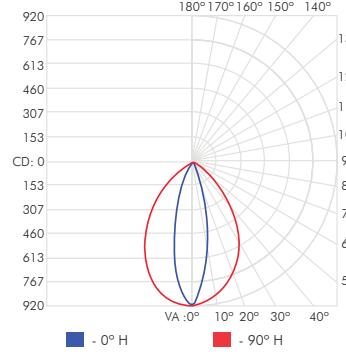


SO Violet

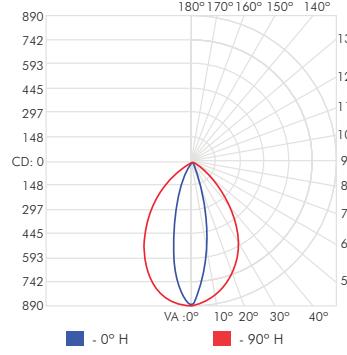


SO Turquoise

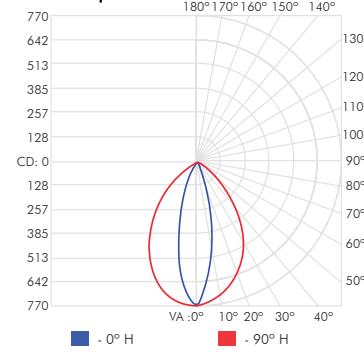


SO Dark Blue

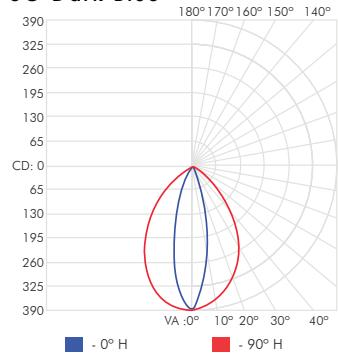

SO Dark Orange

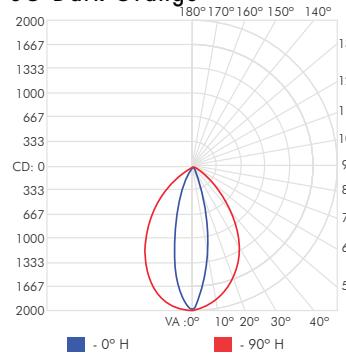


SO Dark Red

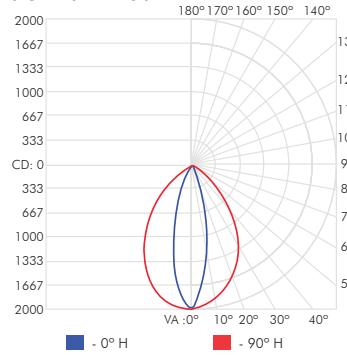


HIGH OUTPUT


HO Red

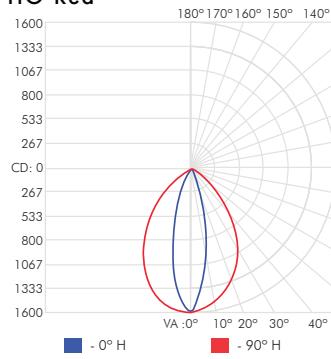


HO Green

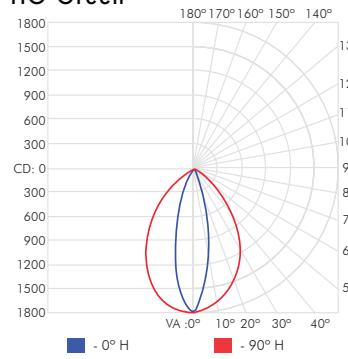


HO Blue

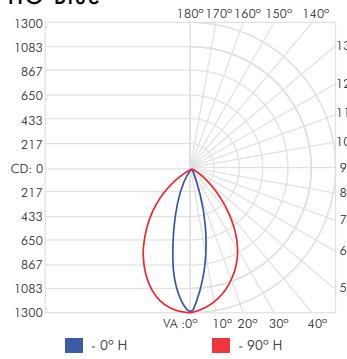


HO Amber

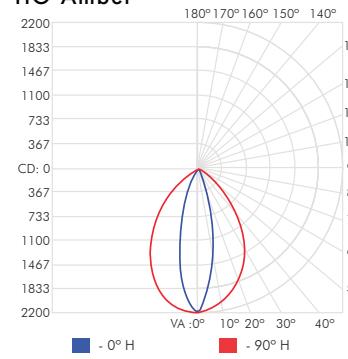


HO Yellow

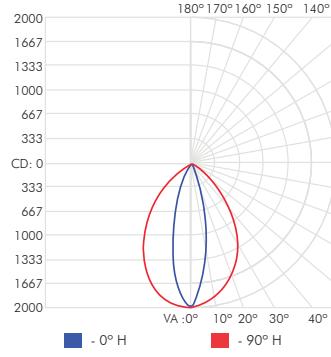


HO Golden Yellow

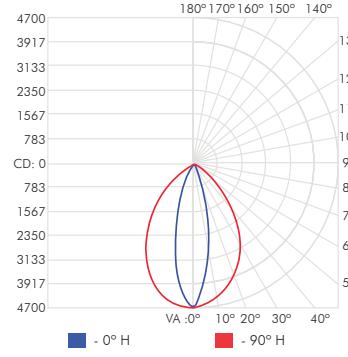


HO Ice Blue

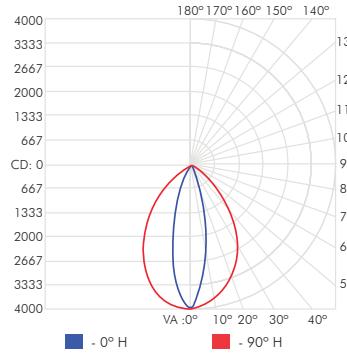


HO Cyan

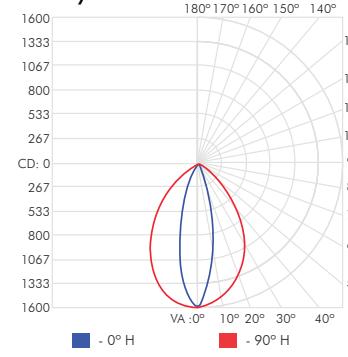


HO Light Green

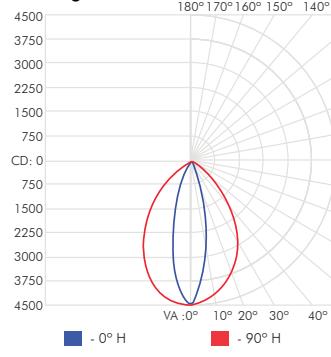


HO Pink

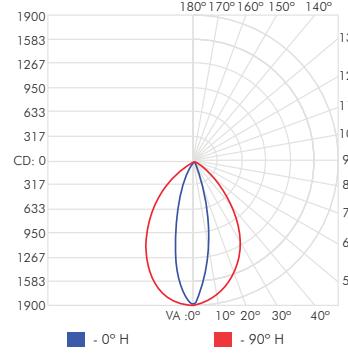


HO Violet

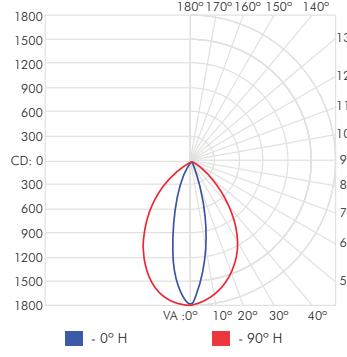


HO Turquoise

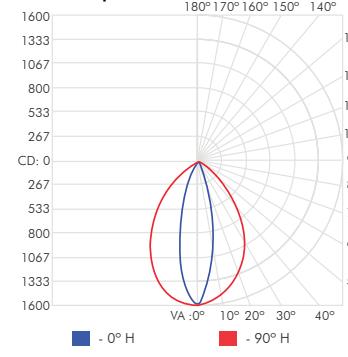


HO Dark Blue

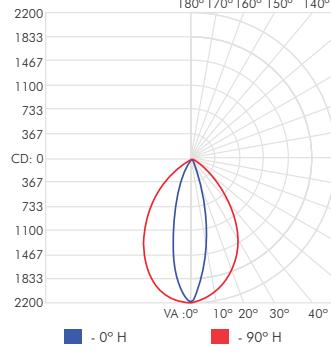

HO Dark Orange

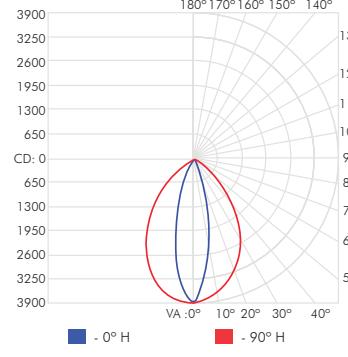


HO Dark Red

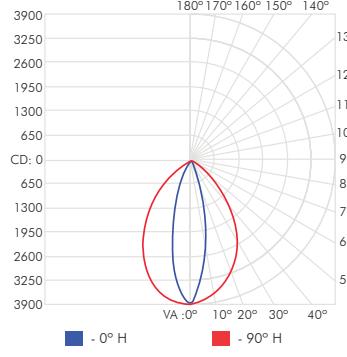


STANDARD OUTPUT


SO Red




SO Green




SO Blue




SO Amber

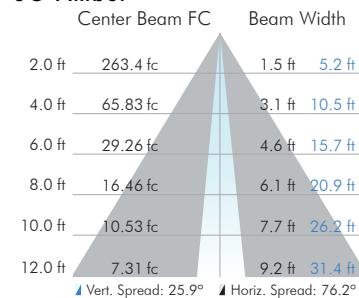


SO Yellow




SO Golden Yellow




SO Ice Blue




SO Cyan

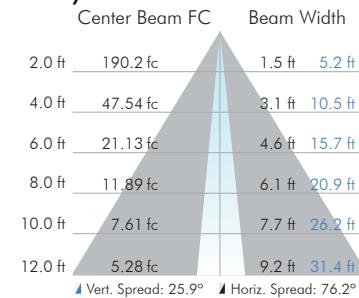


SO Light Green




SO Pink




SO Violet




SO Turquoise

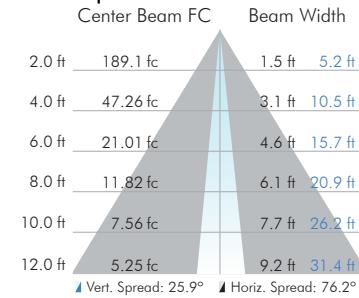


SO Dark Blue



SO Dark Orange




SO Dark Red




HIGH OUTPUT


HO Red




HO Green

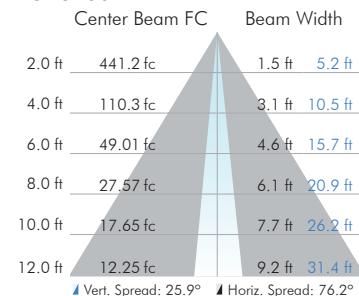


HO Blue

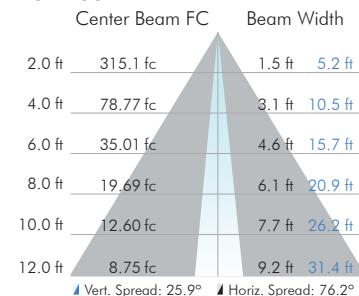


HO Amber

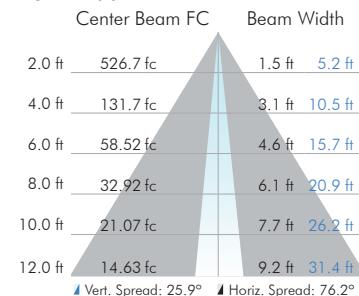


HO Yellow

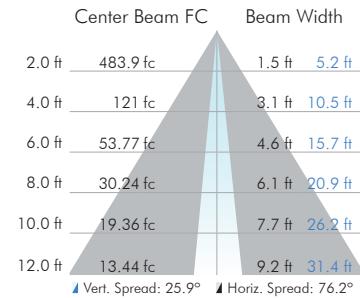


HO Golden Yellow

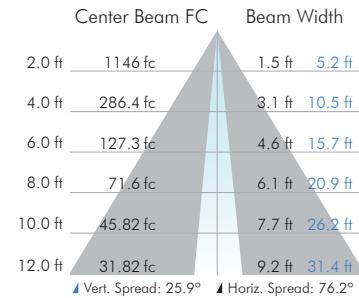


HO Ice Blue

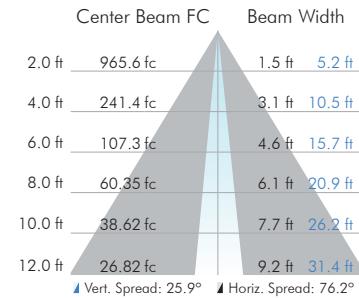


HO Cyan

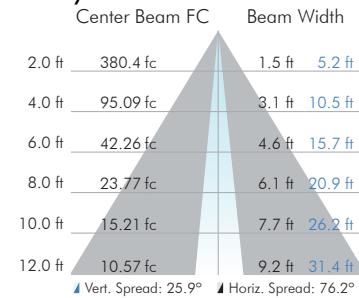


HO Light Green

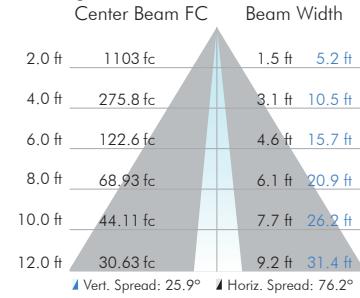


HO Pink

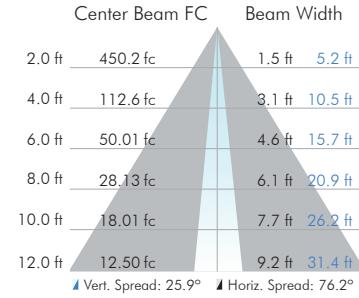


HO Violet

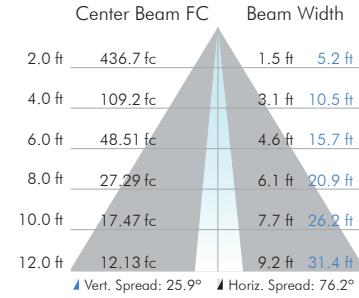


HO Turquoise

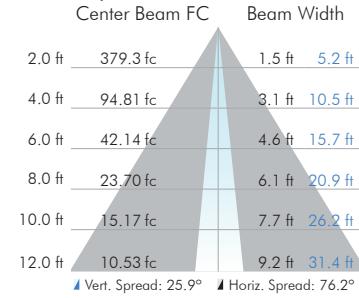


HO Dark Blue

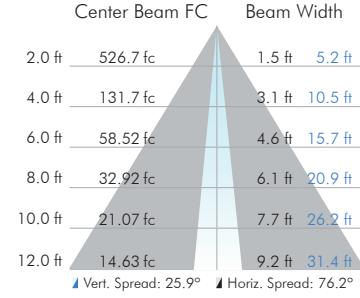


HO Dark Orange

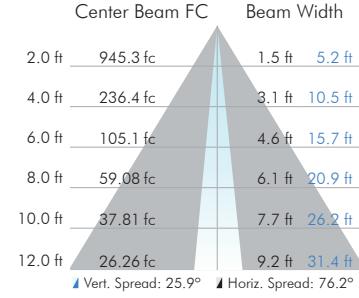


HO Dark Red

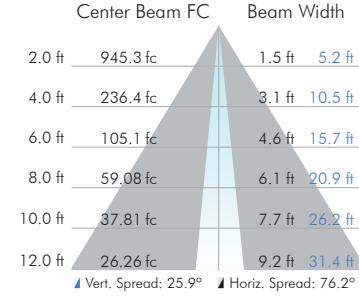


CIE 1931 Chromaticity Diagram

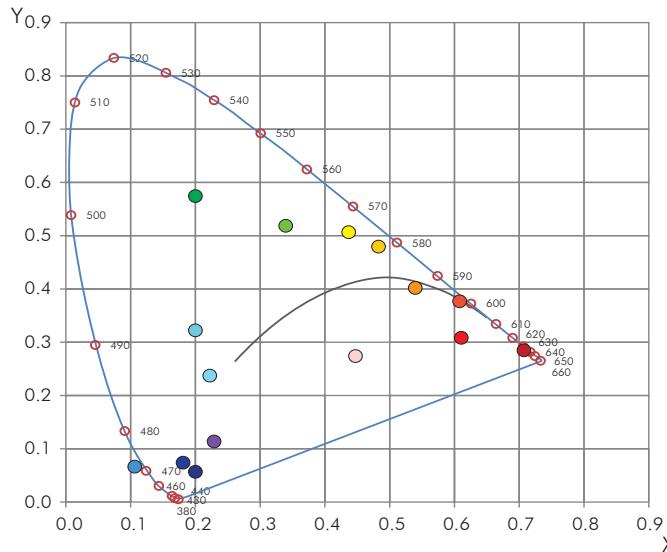


Color	Coordinate	Wavelength
Red	x: 0.6221 y: 0.3174 u: 0.4482 v: 0.5111	620nm
Green	x: 0.2075 y: 0.5883 u: 0.0835 v: 0.5445	520nm
Blue	x: 0.1804 y: 0.0715 u: 0.2158 v: 0.1834	445nm
Amber	x: 0.5415 y: 0.4189 u: 0.3145 v: 0.5412	611nm
Yellow	x: 0.4441 y: 0.5161 u: 0.2140 v: 0.5593	557nm
Golden Yellow	x: 0.4814 y: 0.4892 u: 0.2438 v: 0.5568	583nm
Ice Blue	x: 0.2317 y: 0.2495 u: 0.1676 v: 0.4059	446nm
Cyan	x: 0.1158 y: 0.0735 u: 0.3234 v: 0.5522	473nm
Light Green	x: 0.3458 y: 0.5241 u: 0.1611 v: 0.5487	534nm
Pink	x: 0.4547 y: 0.2832 u: 0.3342 v: 0.4649	621nm
Violet	x: 0.2337 y: 0.1275 u: 0.2301 v: 0.2823	448nm
Turquoise	x: 0.2047 y: 0.3361 u: 0.1852 v: 0.5652	485nm
Dark Blue	x: 0.1542 y: 0.0259 u: 0.2055 v: 0.0776	443nm
Dark Orange	x: 0.6130 y: 0.3791 u: 0.3878 v: 0.5396	622nm
Dark Red	x: 0.7117 y: 0.2759 u: 0.5825 v: 0.5080	672nm



UL / cUL Non-dimming

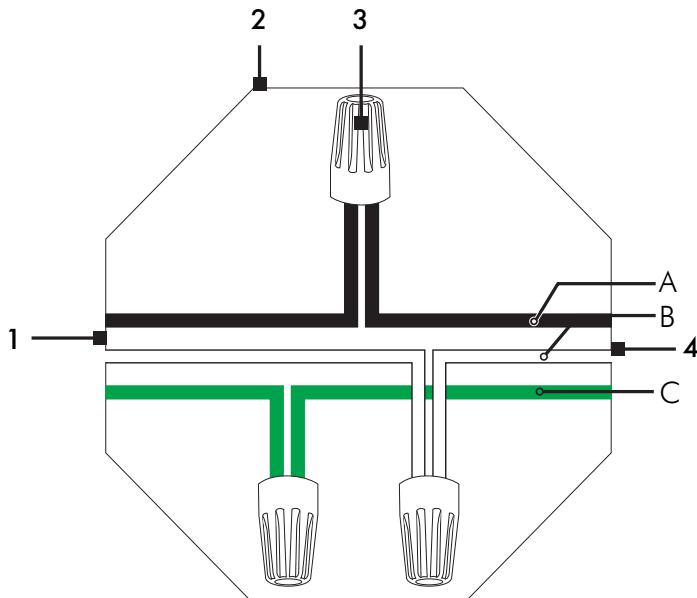

UL / cUL ELV Dimming

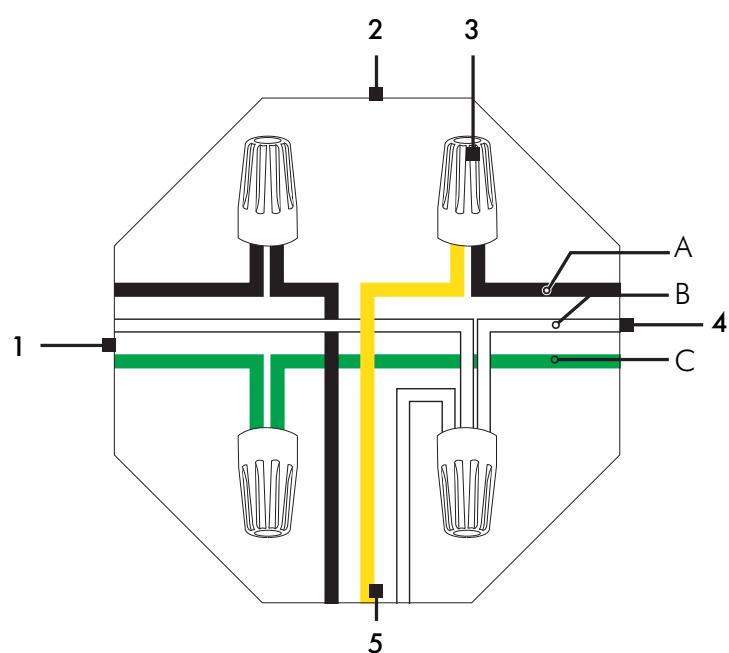

Wiring Legend

1	Power 100-277V AC
2	Junction Box
3	Wiring Nuts
4	3 Pin Leader Cable
5	ELV Dimmer


3 Pin Leader Cable

	UL/cUL	CE/CCC*
A Live 100-277V AC	— Black	— Brown
B Neutral	— White	— Blue
C Ground	— Green	— Green/Yellow


*Not illustrated

ELV Connectors


Male Output



Angle Adjustment




Female Output

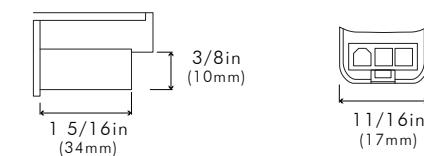

Compatible Dimmers


Please visit our website for a list of compatible dimmers.

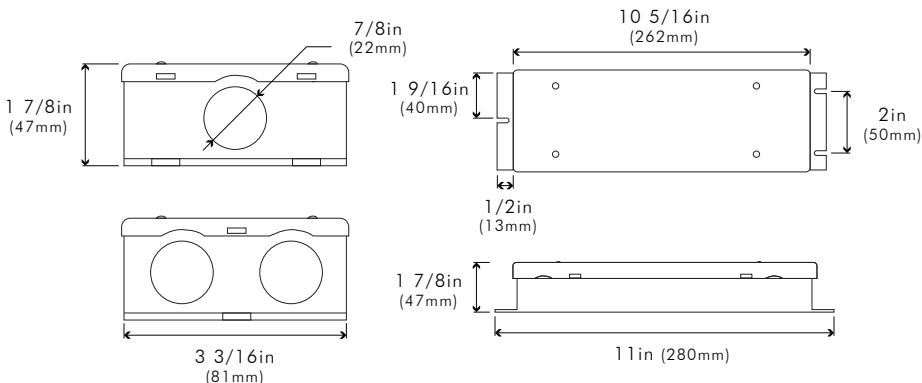

MODA BRIDGE 1 US

CONVERTING 0-10V TO ELV

MODA BRIDGE 1 accepts a standard 0-10V signal from most dimmers and dimming systems and internally converts this signal into an Electronic Low Voltage (ELV) signal, enabling 0-10V control of an ELV fixture. It is optimized to perform precise, smooth, flicker-free dimming down to 0%. Simple wiring with its integral 1/2in holes, which accepts liquid tight or interior conduit connectors. 100-277V 50/60 Hz input. Power up to 840W at 120V, 1600W at 230V, and 1900W at 277V. Outdoor/Damp Location IP65 rated and potted. Fully protected from surge, short circuit, open circuit and over temperature. Power Input and data interface protected with High Grade Surge Protection. Use one MODA BRIDGE1 US per run. Designed and developed by MODA LIGHT, Las Vegas USA.

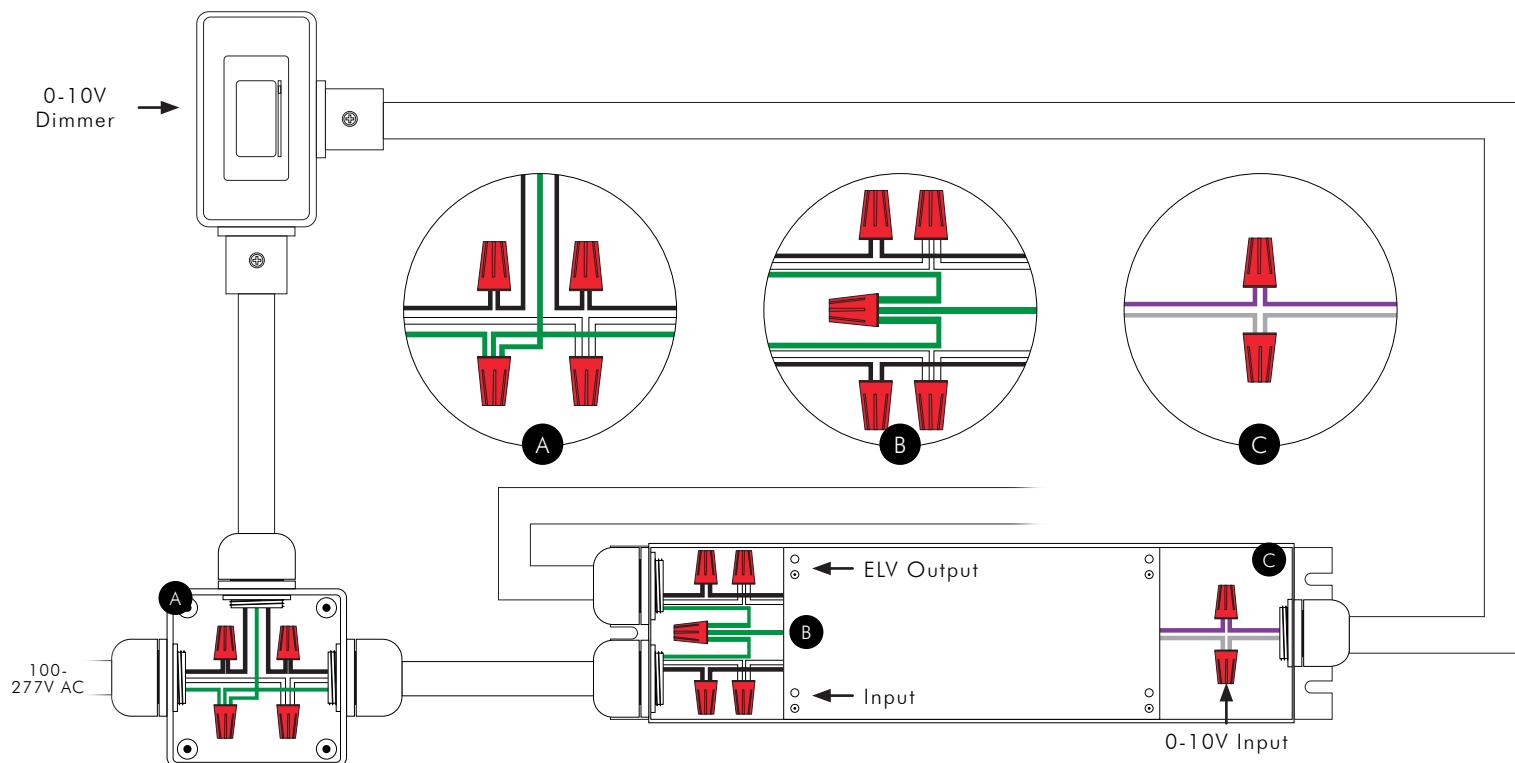

Input


	UL/cUL	CE/CCC*
Live 100-277V	— Black	— Brown
Neutral	— White	— Blue
Ground	— Green	— Green/Yellow
Data +	— Purple	— Black
Data -	— Gray	— Gray

*Not illustrated

Output


	UL/cUL	CE/CCC*
Live 100-277V	— Black	— Brown
Neutral	— White	— Blue
Ground	— Green	— Green/Yellow

*Not illustrated

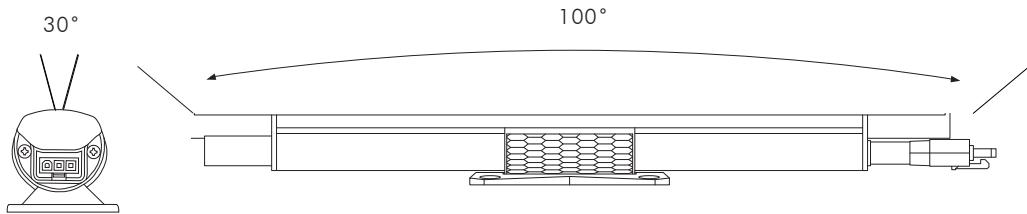

Wallwash Optic.


Wall wash any indoor application with its integral linear optic of 30° x 100° for a precise beam pattern with no color over angle, no striations and no dark spots up to 20ft (6m).

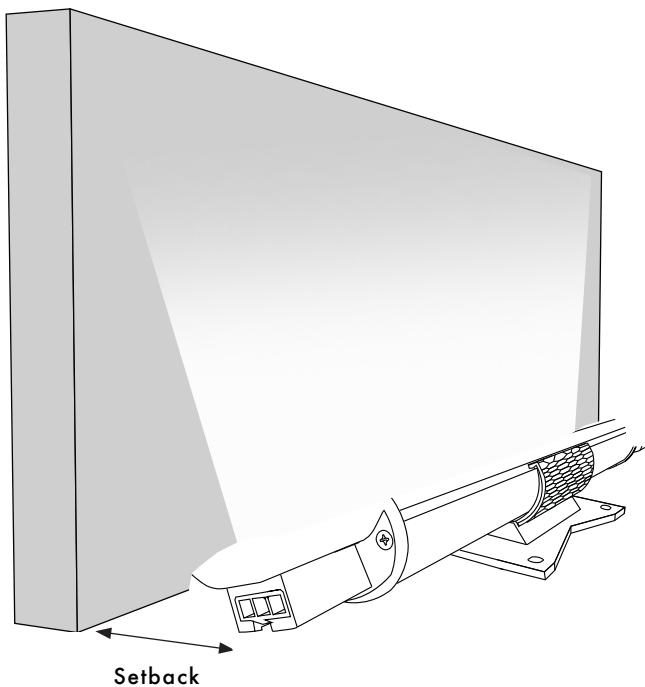

Setback Chart

10ft Wall 1 ft

Recommended Setback from wall is 1/10 of wall height.

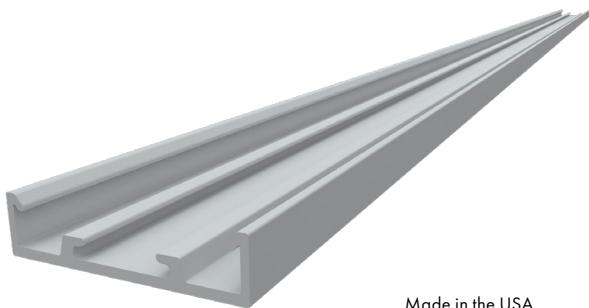

Made in the USA

MODA MINI COVE MOUNTING TRACK

MOUNTING MINI COVE

Allows users to install Moda Mini Cove fixtures in a continuous linear position. Moda Mini Cove Mounting Tracks come packaged in 5 pieces of 4ft sections to create a continuous run of 20ft.

Made in the USA.

Options

Finish G - Gray

Length 4ft - 4ft Sections

Quantity 5 Pieces (20ft)

Physical

Applications Cove, Accent

Construction ABS Plastic



MODA MINI COVE TRACK CONNECTOR

Joins two pieces of track together.

Accepts screw sizes






Drywall	#6	#8
---------	----	----

Self tapping	#6	#8
--------------	----	----

Concrete Anchor	3/16in
-----------------	--------

(By others)

ACCESSORIES: MOUNTING TRACK

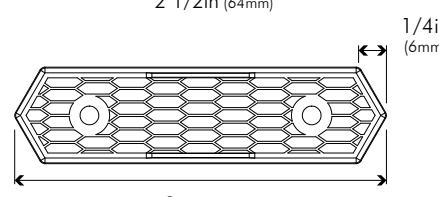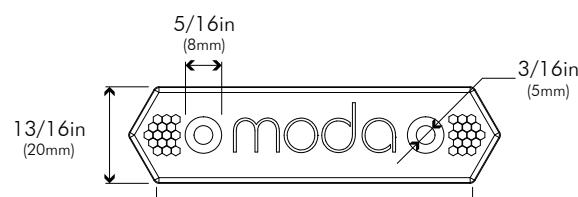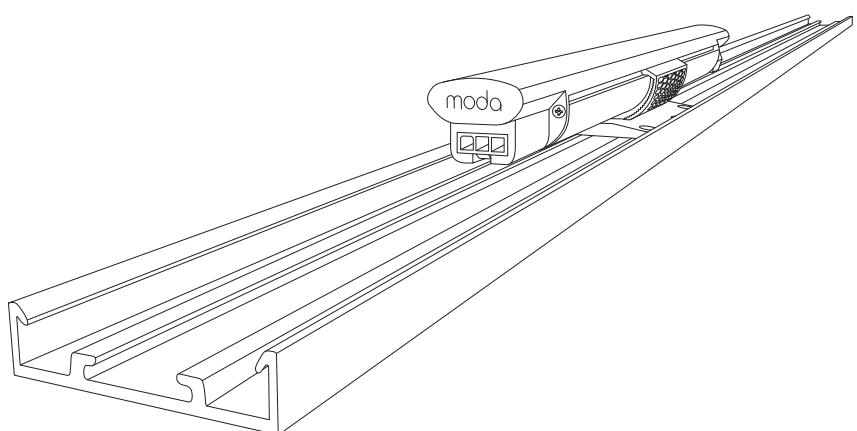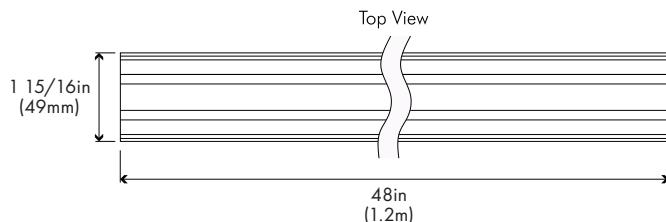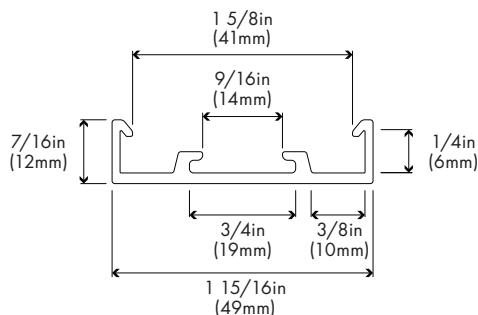



MODA MINI COVE LOUVERS ASYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options




Finish	B - BLACK W - WHITE
--------	------------------------


Length	6IN, 1FT
--------	----------

Physical

Applications	Cove, Accent, Graze
--------------	---------------------

Construction	ABS
--------------	-----

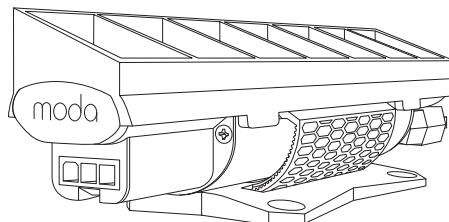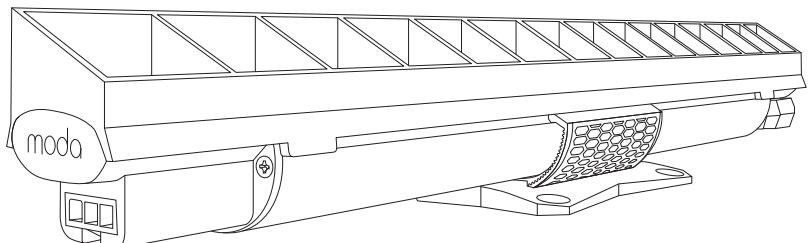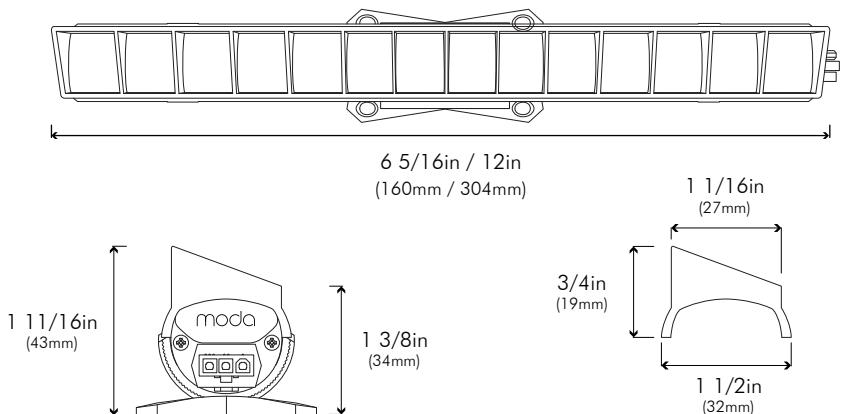

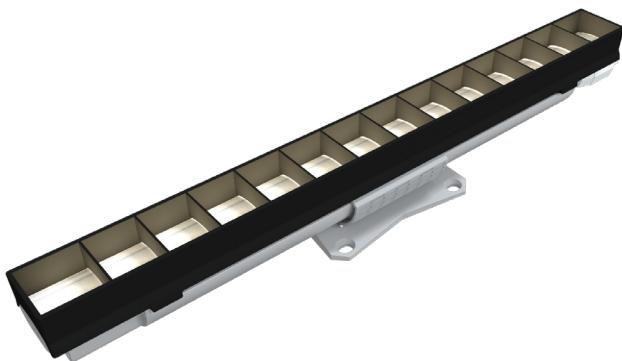

MODA MINI COVE LOUVERS SYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options




Finish	B - BLACK W - WHITE
--------	------------------------

Length	6IN, 1FT
--------	----------

Physical

Applications	Cove, Accent, Graze
--------------	---------------------

Construction	ABS
--------------	-----

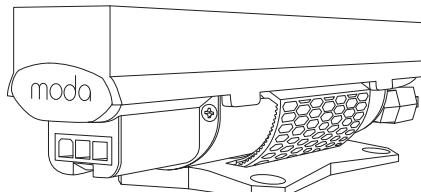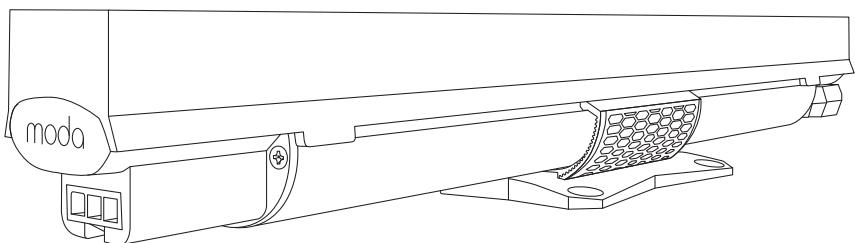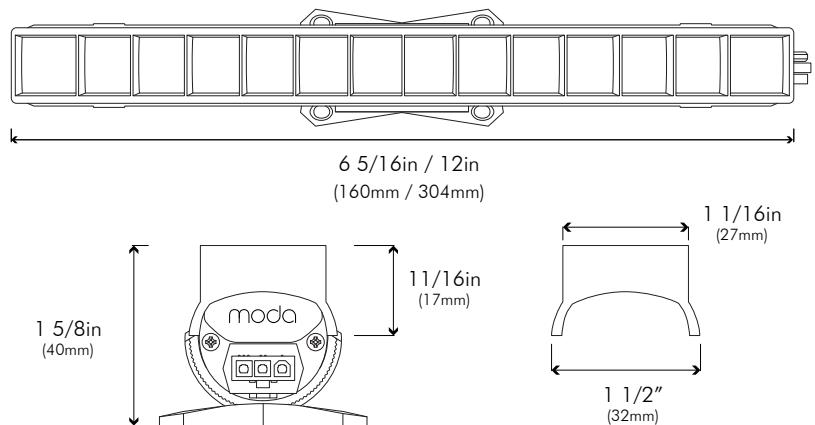



MODA MINI COVE LOUVERS HONEYCOMB

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

Features

- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected




Options

Finish	B - BLACK W - WHITE
--------	------------------------

Length	6IN, 1FT
--------	----------

Physical

Applications	Cove, Accent, Graze
Construction	ABS

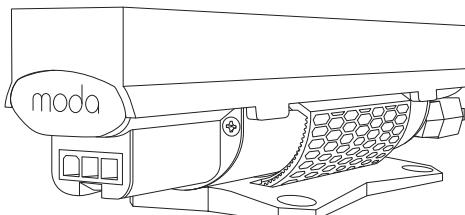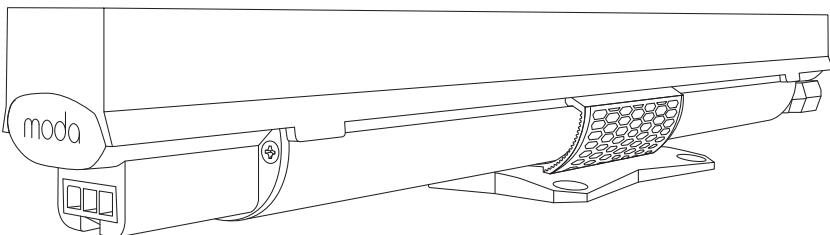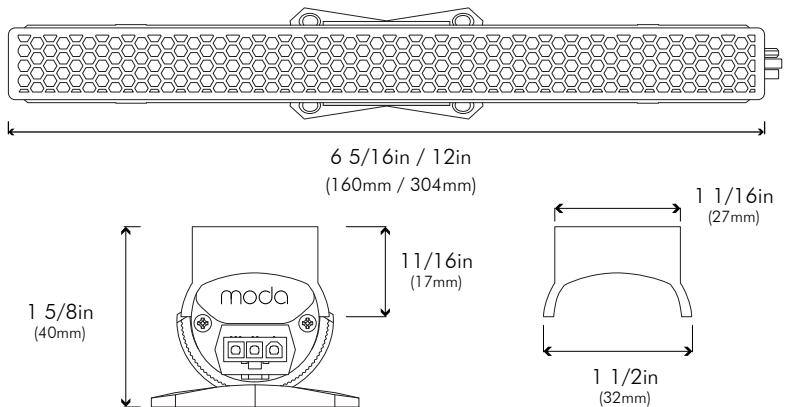



MODA MINI COVE LOUVERS BLADE

Add visual interest to any space by creating a narrow line of light, which can be seen in semi direct view or reflected off the wall or ceiling when integrated into a cove or niche. Use four 1ft louvers for a 4ft fixture.

Features




- Convenient 6in and 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

Options

Finish	B - BLACK
Length	6IN, 1FT

Physical


Applications	Cove, Accent, Graze
Construction	ABS

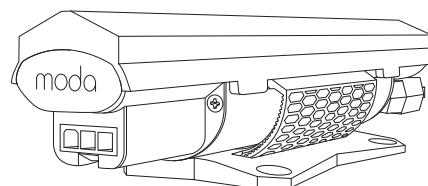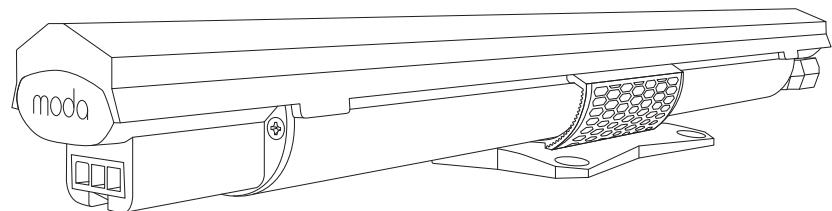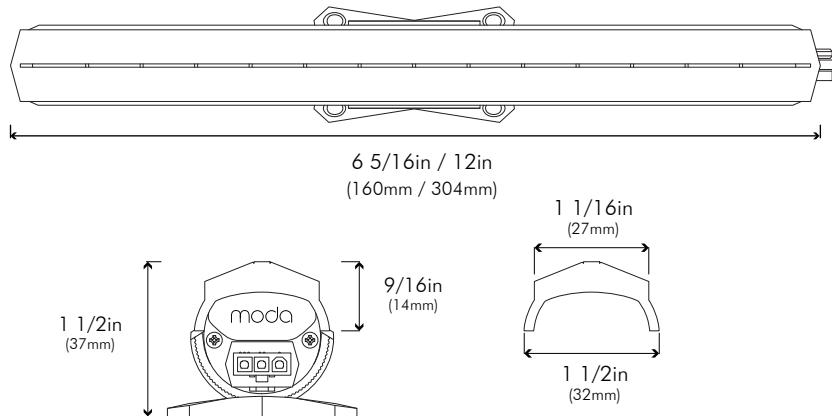

ELV LEADER CABLES

Moda Mini Cove Interior 3 Pin Leader Cables

	UL/cUL	EU/CCC
Lengths	10FT and 25FT	3M and 10M
Color	White	White

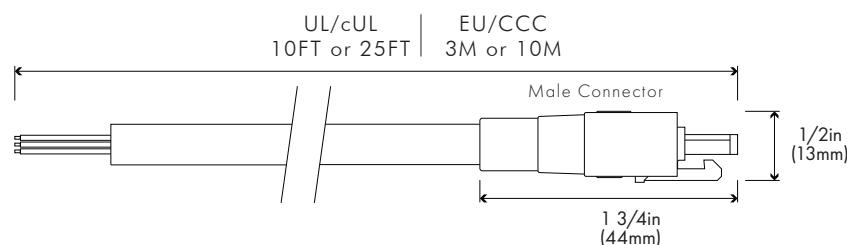


Male Connector

	Front	Top
	7/16in (11mm) height, 11/16in (18mm) width.	15/16in (24mm) width, 1 3/8in (35mm) length.

ELV JUMPER CABLES

Moda Mini Cove Interior 3 Pin Jumper Cables

	UL/cUL	EU/CCC
Lengths	1FT and 4FT	300MM and 1M
Color	White	White

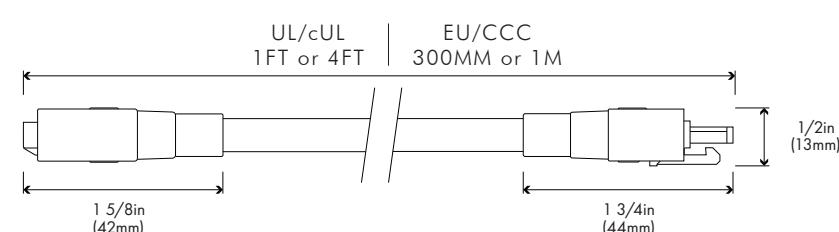


Female Connector

	Front	Top
	7/16in (11mm) height, 11/16in (18mm) width.	15/16in (24mm) width, 1 3/8in (35mm) length.


Connectors

	Front	Top
	7/16in (11mm) height, 11/16in (18mm) width.	15/16in (24mm) width, 1 3/8in (35mm) length.


Male

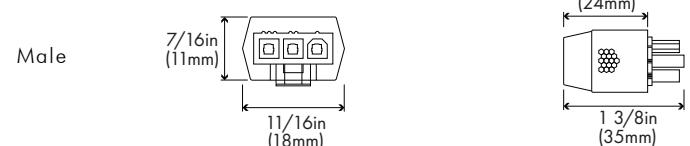

Female

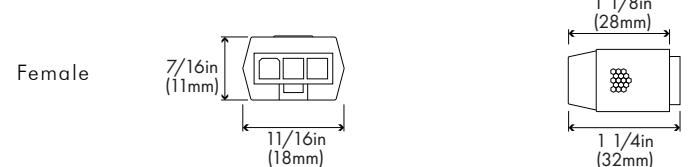


Pin Assignment



UL/cUL EU/CCC

1	Live 100-277V	Black	Brown
2	Ground	Green	Green/Yellow
3	Neutral	White	Blue


Pin Assignment



Male

UL/cUL EU/CCC

1	Live 100-277V	Black	Brown
2	Ground	Green	Green/Yellow
3	Neutral	White	Blue



Female

UL/cUL EU/CCC

1	Neutral	White	Blue
2	Ground	Green	Green/Yellow
3	Live 100-277V	Black	Brown

Fixture	Ordering Number	Part Number
Moda Mini Graze Interior Standard Output Silver ELV Dimming Red 6IN 30X100	MMGI-S-S1-S-E-R-6-310	131-0000
Moda Mini Graze Interior Standard Output Silver ELV Dimming Green 6IN 30X100	MMGI-S-S1-S-E-G-6-310	131-0001
Moda Mini Graze Interior Standard Output Silver ELV Dimming Blue 6IN 30X100	MMGI-S-S1-S-E-B-6-310	131-0002
Moda Mini Graze Interior Standard Output Silver ELV Dimming Amber 6IN 30X100	MMGI-S-S1-S-E-A-6-310	131-0003
Moda Mini Graze Interior Standard Output Silver ELV Dimming Yellow 6IN 30X100	MMGI-S-S1-S-E-Y-6-310	131-0004
Moda Mini Graze Interior Standard Output Silver ELV Dimming Pink 6IN 30X100	MMGI-S-S1-S-E-P-6-310	131-0005
ELV Moda Mini Graze Interior Standard Output Silver ELV Dimming Cyan 6IN 30X100	MMGI-S-S1-S-E-C-6-310	131-0006
SO Moda Mini Graze Interior Standard Output Silver ELV Dimming Violet 6IN 30X100	MMGI-S-S1-S-E-V-6-310	131-0007
6IN Moda Mini Graze Interior Standard Output Silver ELV Dimming Turquoise 6IN 30X100	MMGI-S-S1-S-E-TQ-6-310	131-0008
Moda Mini Graze Interior Standard Output Silver ELV Dimming Ice Blue 6IN 30X100	MMGI-S-S1-S-E-IB-6-310	131-0009
Moda Mini Graze Interior Standard Output Silver ELV Dimming Light Green 6IN 30X100	MMGI-S-S1-S-E-LG-6-310	131-0010
Moda Mini Graze Interior Standard Output Silver ELV Dimming Golden Yellow 6IN 30X100	MMGI-S-S1-S-E-GY-6-310	131-0011
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Blue 6IN 30X100	MMGI-S-S1-S-E-DB-6-310	131-0012
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Orange 6IN 30X100	MMGI-S-S1-S-E-DO-6-310	131-0013
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Red 6IN 30X100	MMGI-S-S1-S-E-DR-6-310	131-0014
Moda Mini Graze Interior Standard Output Silver ELV Dimming Red 1FT 30X100	MMGI-S-S1-S-E-R-1-310	131-1000
Moda Mini Graze Interior Standard Output Silver ELV Dimming Green 1FT 30X100	MMGI-S-S1-S-E-G-1-310	131-1001
Moda Mini Graze Interior Standard Output Silver ELV Dimming Blue 1FT 30X100	MMGI-S-S1-S-E-B-1-310	131-1002
Moda Mini Graze Interior Standard Output Silver ELV Dimming Amber 1FT 30X100	MMGI-S-S1-S-E-A-1-310	131-1003
Moda Mini Graze Interior Standard Output Silver ELV Dimming Yellow 1FT 30X100	MMGI-S-S1-S-E-Y-1-310	131-1004
Moda Mini Graze Interior Standard Output Silver ELV Dimming Pink 1FT 30X100	MMGI-S-S1-S-E-P-1-310	131-1005
ELV Moda Mini Graze Interior Standard Output Silver ELV Dimming Cyan 1FT 30X100	MMGI-S-S1-S-E-C-1-310	131-1006
SO Moda Mini Graze Interior Standard Output Silver ELV Dimming Violet 1FT 30X100	MMGI-S-S1-S-E-V-1-310	131-1007
1FT Moda Mini Graze Interior Standard Output Silver ELV Dimming Turquoise 1FT 30X100	MMGI-S-S1-S-E-TQ-1-310	131-1008
Moda Mini Graze Interior Standard Output Silver ELV Dimming Ice Blue 1FT 30X100	MMGI-S-S1-S-E-IB-1-310	131-1009
Moda Mini Graze Interior Standard Output Silver ELV Dimming Light Green 1FT 30X100	MMGI-S-S1-S-E-LG-1-310	131-1010
Moda Mini Graze Interior Standard Output Silver ELV Dimming Golden Yellow 1FT 30X100	MMGI-S-S1-S-E-GY-1-310	131-1011
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Blue 1FT 30X100	MMGI-S-S1-S-E-DB-1-310	131-1012
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Orange 1FT 30X100	MMGI-S-S1-S-E-DO-1-310	131-1013
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Red 1FT 30X100	MMGI-S-S1-S-E-DR-1-310	131-1014
Moda Mini Graze Interior High Output Silver ELV Dimming Red 1FT 30X100	MMGI-H-S1-S-E-R-1-310	131-1200
Moda Mini Graze Interior High Output Silver ELV Dimming Green 1FT 30X100	MMGI-H-S1-S-E-G-1-310	131-1201
Moda Mini Graze Interior High Output Silver ELV Dimming Blue 1FT 30X100	MMGI-H-S1-S-E-B-1-310	131-1202
Moda Mini Graze Interior High Output Silver ELV Dimming Amber 1FT 30X100	MMGI-H-S1-S-E-A-1-310	131-1203
Moda Mini Graze Interior High Output Silver ELV Dimming Yellow 1FT 30X100	MMGI-H-S1-S-E-Y-1-310	131-1204
Moda Mini Graze Interior High Output Silver ELV Dimming Pink 1FT 30X100	MMGI-H-S1-S-E-P-1-310	131-1205
ELV Moda Mini Graze Interior High Output Silver ELV Dimming Cyan 1FT 30X100	MMGI-H-S1-S-E-C-1-310	131-1206
HO Moda Mini Graze Interior High Output Silver ELV Dimming Violet 1FT 30X100	MMGI-H-S1-S-E-V-1-310	131-1207
1FT Moda Mini Graze Interior High Output Silver ELV Dimming Turquoise 1FT 30X100	MMGI-H-S1-S-E-TQ-1-310	131-1208
Moda Mini Graze Interior High Output Silver ELV Dimming Ice Blue 1FT 30X100	MMGI-H-S1-S-E-IB-1-310	131-1209
Moda Mini Graze Interior High Output Silver ELV Dimming Light Green 1FT 30X100	MMGI-H-S1-S-E-LG-1-310	131-1210
Moda Mini Graze Interior High Output Silver ELV Dimming Golden Yellow 1FT 30X100	MMGI-H-S1-S-E-GY-1-310	131-1211
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Blue 1FT 30X100	MMGI-H-S1-S-E-DB-1-310	131-1212
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Orange 1FT 30X100	MMGI-H-S1-S-E-DO-1-310	131-1213
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Red 1FT 30X100	MMGI-H-S1-S-E-DR-1-310	131-1214

Fixture	Ordering Number	Part Number
Moda Mini Graze Interior Standard Output Silver ELV Dimming Red 4FT 30X100	MMCI-S-S1-S-E-R-4-310	131-3000
Moda Mini Graze Interior Standard Output Silver ELV Dimming Green 4FT 30X100	MMCI-S-S1-S-E-G-4-310	131-3001
Moda Mini Graze Interior Standard Output Silver ELV Dimming Blue 4FT 30X100	MMCI-S-S1-S-E-B-4-310	131-3002
Moda Mini Graze Interior Standard Output Silver ELV Dimming Amber 4FT 30X100	MMCI-S-S1-S-E-A-4-310	131-3003
Moda Mini Graze Interior Standard Output Silver ELV Dimming Yellow 4FT 30X100	MMCI-S-S1-S-E-Y-4-310	131-3004
Moda Mini Graze Interior Standard Output Silver ELV Dimming Pink 4FT 30X100	MMCI-S-S1-S-E-P-4-310	131-3005
ELV Moda Mini Graze Interior Standard Output Silver ELV Dimming Cyan 4FT 30X100	MMCI-S-S1-S-E-C-4-310	131-3006
SO Moda Mini Graze Interior Standard Output Silver ELV Dimming Violet 4FT 30X100	MMCI-S-S1-S-E-V-4-310	131-3007
4FT Moda Mini Graze Interior Standard Output Silver ELV Dimming Turquoise 4FT 30X100	MMCI-S-S1-S-E-TQ-4-310	131-3008
Moda Mini Graze Interior Standard Output Silver ELV Dimming Ice Blue 4FT 30X100	MMCI-S-S1-S-E-IB-4-310	131-3009
Moda Mini Graze Interior Standard Output Silver ELV Dimming Light Green 4FT 30X100	MMCI-S-S1-S-E-LG-4-310	131-3010
Moda Mini Graze Interior Standard Output Silver ELV Dimming Golden Yellow 4FT 30X100	MMCI-S-S1-S-E-GY-4-310	131-3011
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Blue 4FT 30X100	MMCI-S-S1-S-E-DB-4-310	131-3012
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Orange 4FT 30X100	MMCI-S-S1-S-E-DO-4-310	131-3013
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Red 4FT 30X100	MMCI-S-S1-S-E-DR-4-310	131-3014
Moda Mini Graze Interior High Output Silver ELV Dimming Red 4FT 30X100	MMCI-H-S1-S-E-R-4-310	131-3200
Moda Mini Graze Interior High Output Silver ELV Dimming Green 4FT 30X100	MMCI-H-S1-S-E-G-4-310	131-3201
Moda Mini Graze Interior High Output Silver ELV Dimming Blue 4FT 30X100	MMCI-H-S1-S-E-B-4-310	131-3202
Moda Mini Graze Interior High Output Silver ELV Dimming Amber 4FT 30X100	MMCI-H-S1-S-E-A-4-310	131-3203
Moda Mini Graze Interior High Output Silver ELV Dimming Yellow 4FT 30X100	MMCI-H-S1-S-E-Y-4-310	131-3204
Moda Mini Graze Interior High Output Silver ELV Dimming Pink 4FT 30X100	MMCI-H-S1-S-E-P-4-310	131-3205
ELV Moda Mini Graze Interior High Output Silver ELV Dimming Cyan 4FT 30X100	MMCI-H-S1-S-E-C-4-310	131-3206
HO Moda Mini Graze Interior High Output Silver ELV Dimming Violet 4FT 30X100	MMCI-H-S1-S-E-V-4-310	131-3207
4FT Moda Mini Graze Interior High Output Silver ELV Dimming Turquoise 4FT 30X100	MMCI-H-S1-S-E-TQ-4-310	131-3208
Moda Mini Graze Interior High Output Silver ELV Dimming Ice Blue 4FT 30X100	MMCI-H-S1-S-E-IB-4-310	131-3209
Moda Mini Graze Interior High Output Silver ELV Dimming Light Green 4FT 30X100	MMCI-H-S1-S-E-LG-4-310	131-3210
Moda Mini Graze Interior High Output Silver ELV Dimming Golden Yellow 4FT 30X100	MMCI-H-S1-S-E-GY-4-310	131-3211
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Blue 4FT 30X100	MMCI-H-S1-S-E-DB-4-310	131-3212
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Orange 4FT 30X100	MMCI-H-S1-S-E-DO-4-310	131-3213
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Red 4FT 30X100	MMCI-H-S1-S-E-DR-4-310	131-3214

ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Leader Cable US 3 Pin 10FT	Power to first fixture of run	MLCI-US-3PIN-W-10FT	299-0000
Leader Cable US 3 Pin 25FT	Power to first fixture of run	MLCI-US-3PIN-W-25FT	299-0002
Jumper Cable US 3 Pin 1FT	Connection between fixtures	MJCI-US-3PIN-W-1FT	299-1000
Jumper Cable US 3 Pin 4FT	Connection between fixtures	MJCI-US-3PIN-W-4FT	299-1002
Leader Cable EU 3 Pin 3M	Power to first fixture of run	MLCI-EU-3PIN-W-3M	299-0001
Leader Cable EU 3 Pin 10M	Power to first fixture of run	MLCI-EU-3PIN-W-10M	299-0003
Jumper Cable EU 3 Pin 300MM	Connection between fixtures	MJCI-EU-3PIN-W-300MM	299-1001
Jumper Cable EU 3 Pin 1M	Connection between fixtures	MJCI-EU-3PIN-W-1M	299-1003
Terminator 3 Pin	Must be fixed to last fixture for safety	MTI-3PIN-W	299-2000
Mounting Track 20FT	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G	299-3200
Mounting Track Connector	Interior track connector	N/A	299-3202
Fixture Quick Release Tool	Enables quick fixture removal from Mounting Track	N/A	299-3203
Symmetric Louver 6IN - Black	Symmetric louver for light control	N/A	299-4220
Symmetric Louver 6IN - White	Symmetric louver for light control	N/A	299-4320
Asymmetric Louver 6IN - Black	Asymmetric louver for light control	N/A	299-4221
Asymmetric Louver 6IN - White	Asymmetric louver for light control	N/A	299-4321
Honeycomb Louver 6IN - Black	Honeycomb louver for light control	N/A	299-4222
Honeycomb Louver 6IN - White	Honeycomb louver for light control	N/A	299-4322
Blade Louver 6IN - Black	Blade louver for light control	N/A	299-4223
Symmetric Louver 1FT - Black	Symmetric louver for light control	N/A	299-4230
Symmetric Louver 1FT - White	Symmetric louver for light control	N/A	299-4330
Asymmetric Louver 1FT - Black	Asymmetric louver for light control	N/A	299-4231
Asymmetric Louver 1FT - White	Asymmetric louver for light control	N/A	299-4331
Honeycomb Louver 1FT - Black	Honeycomb louver for light control	N/A	299-4232
Honeycomb Louver 1FT - White	Honeycomb louver for light control	N/A	299-4332
Blade Louver 1FT - Black	Blade louver for light control	N/A	299-4233

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
Bridge 1 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-Sx-S	250-0000