


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

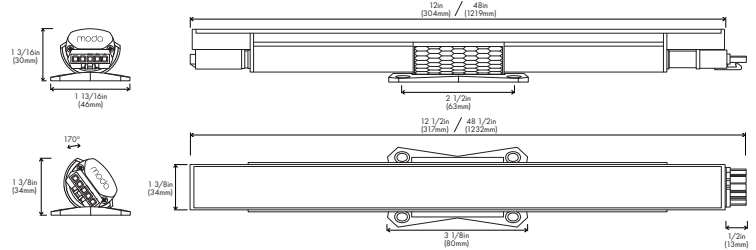

## PHYSICAL

Dimensions	L: 12in (304mm)	W: 1 13/16in (46mm)
	L: 48in (1219mm)	H: 1 3/16in (30mm)
Weight	1ft: 0.38 lbs (0.17kg)	
	4ft: 1.22 lbs (0.55 kg)	
Applications	Cove, Accent, & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

## SPECIFICATIONS

	Lumens	Efficacy
1FT	448 - 489	74.66 - 94.03
4FT	1779 - 1891	92.17 - 103.33

## POWER CONSUMPTION

	120V AC	240V AC	277V AC
1 FT	5.8W	5.8W	6.2W
4 FT	21.6W	21.6W	21.8W

## MAX CONTINUOUS RUN \*

	120V AC	240V AC	277V AC
SO	120ft	240ft	240ft

\*Each connection uses 1mA power. Please check chosen dimmer for any mA restrictions (i.e., 50mA restriction = 50 maximum connections).

## OUTPUT

CCTs	2700K to 1800K
	3000K to 2200K
	3500K to 2200K
Beam Angle	200°
CRI	98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C
	70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

## STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant. Title 24, JA8-2019
Class	1
Warranty	5 Year Limited Warranty

	FIXTURES	PART NUMBER	ORDERING SKU
DMX 1FT	Moda Mini Graze Interior Glowdim Standard Output Silver DMX512 Dimming 2700K-1800K HCRI 1FT	MMGI-S-S-DMX512-GD2718-1	147-1002
	Moda Mini Graze Interior Glowdim Standard Output Silver DMX512 Dimming 3000K-2200K HCRI 1FT	MMGI-S-S-DMX512-GD3022-1	147-1023
	Moda Mini Graze Interior Glowdim Standard Output Silver DMX512 Dimming 3500K-2200K HCRI 1FT	MMGI-S-S-DMX512-GD3522-1	147-1025
DMX 4FT	Moda Mini Graze Interior Glowdim Standard Output Silver DMX512 Dimming 2700K-1800K HCRI 4FT	MMGI-S-S-DMX512-GD2718-4	147-3002
	Moda Mini Graze Interior Glowdim Standard Output Silver DMX512 Dimming 3000K-2200K HCRI 4FT	MMGI-S-S-DMX512-GD3022-4	147-3023
	Moda Mini Graze Interior Glowdim Standard Output Silver DMX512 Dimming 3500K-2200K HCRI 4FT	MMGI-S-S-DMX512-GD3522-4	147-3025

ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Leader Cable US 5 Pin 10FT	Power to first fixture of run	MLCI-US-5PIN-W-10FT	299-0100
Leader Cable US 5 Pin 25FT	Power to first fixture of run	MLCI-US-5PIN-W-25FT	299-0102
Jumper Cable US 5 Pin 1FT	Connection between fixtures	MJCI-US-5PIN-W-1FT	299-1100
Jumper Cable US 5 Pin 4FT	Connection between fixtures	MJCI-US-5PIN-W-4FT	299-1102
Leader Cable EU 5 Pin 3M	Power to first fixture of run	MLCI-EU-5PIN-W-3M	299-0101
Leader Cable EU 5 Pin 10M	Power to first fixture of run	MLCI-EU-5PIN-W-10M	299-0103
Jumper Cable EU 5 Pin 300MM	Connection between fixtures	MJCI-EU-5PIN-W-300MM	299-1101
Jumper Cable EU 5 Pin 1M	Connection between fixtures	MJCI-EU-5PIN-W-1M	299-1103
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W	299-2100
Mounting Track 20FT	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G	299-3200
Mounting Track Connector	Interior track connector	N/A	299-3202
Symmetric Louver 1FT	Symmetric louver for light control	N/A	299-4230
Asymmetric Louver 1FT	Asymmetric louver for light control	N/A	299-4231
Honeycomb Louver 1FT	Honeycomb louver for light control	N/A	299-4232
Blade Louver 1FT	Blade louver for light control	N/A	299-4233

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
Kandi Touch	DMX512 Wall Mounted Touch Panel Controller with Color Display	KND-TCH-B (Black)	250-0040
		KND-TCH-W (White)	250-0041
MODA Touch*	DMX512 Wall Mounted Touch Panel Controller	MTCH-S1-B (Black)	MTCH-S1-B
		MTCH-S1-W (White)	MTCH-S1-W

\* - MODA Touch default scene addressing can be found on MODA Touch Product Documentation and DMX Fixture Installation Guides.

CONTROL ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Pathway DMX Splitter/Repeater	Wall-mount, 4 ports, E1.20 RDM Compliant, Small - 10in X 13in X 4 1/2in	PWREP WM P4 TERM RDM SML DMX-RDM	250-0153
Pathway DMX Splitter/Repeater	Wall-mount, 8 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P8 TERM RDM MED DMX-RDM	250-0154
Pathway DMX Splitter/Repeater	Wall-mount, 12 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P12 TERM RDM MED DMX-RDM	250-0155
Shielded Cable 500FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-500FT	250-0251
Shielded Cable 1000FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-1000FT	250-0252