

Client: \_\_\_\_\_ Project Name: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

SKU: \_\_\_\_\_ Type: \_\_\_\_\_ PO #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_



#### Miniature Line Voltage Graze Fixture.

MODA MINI GRAZE INTERIOR is an exciting brand new Wall Grazing Lighting System built upon our Award winning, patented, MINI COVE Series. Powerful and efficient with a choice of Standard Output at 651 lumens per foot or High Output delivering an astonishing 1253 lumens per foot packaged in a small size of just 1 3/16" (30mm) tall fixture. Unlike other fixtures which are much larger in physical size, MINI GRAZE utilizes the latest Advanced MODA Design and Electronic Engineering, ensuring fixtures are cool to the touch even at 1253 lumens per foot. This is achieved by designing a forward thinking fixture with intelligent driver technology and by under driving the most advanced LEDs in the world. Thus creating a fixture which is so cool it can be held after days of illumination. The L70 (longevity) of the fixture is extended and phosphor degradation is kept to a minimum.

The Onboard American Dimming Chipset, programmed by our MODA Software Division with new Advanced Firmware ensures MINI GRAZE delivers smooth, no noise, flicker-free and synchronized dimming down to 0% with ELV or 0-10V Dimmers. Choose from either ELV or 0-10V direct dimming fixtures. Unlike other fixtures in the marketplace there is no need to purchase additional adapters, converters, dimming boxes or control modules, just use conventional wiring direct from the dimmer to create a powerful lighting system, saving time and money. Link any combination of 6in, 1ft, and 4ft fixtures and every fixture will dim together smoothly, synchronized from 100% to 0%. With no minimum run lengths, just one 6in fixture will dim seamlessly to 0%.

Wall wash any indoor application with its integral linear optic of 30° x 100° for a perfect asymmetric beam pattern with no color over angle, no striations and no dark spots up to 20ft (6m). Achieve long single runs of up to 240 feet decreasing the number of wiring circuits required in an installation. Another step forward in this category of small sized fixtures is the universal power input. We designed a small MODA Micro Driver specific for MINI GRAZE enabling it to accept 100-277V AC 50/60Hz, decreasing the number of SKUs needed to be held by any of our worldwide distributors and giving the installer a choice of power inputs from one fixture.

With the ability to mix our own phosphors we are able to make a revolutionary new standard for MODA offering a High Color Rendering Index of 96-98 with LEDs centered on the Planckian Locus for superior illumination. R1-R15 tested to TM30-15 with values in excess of 90, creating beautiful cove illumination. Single binning means every fixture will have the same CCT - something that MODA has been doing since 2006. A specialized curved polymer optical lens combined with a cleverly designed light chamber delivers a smooth, light bending 30° x 100° beam pattern perfect for cove installations with interlocking fields of light, no color over angle, no striations, and no dark spots. Choose from our standard white light temperatures of 1800K, 2200K, 2700K, 3000K, 3500K, 4000K, & 6500K. 1800K is candle-light, ideal for creating truly warm nostalgic coves. 2200K is ideal for hospitality applications with its rich warm tones. 2200K no longer looks dull, dirty or "muddy". 2700K is an excellent example of incandescent looking illumination. 3000K has often been described as one of the best looking 3000K in the industry. 3500K is the color which has now become our standard go-to temperature, not being too neutral with a hint of warmth. 4000K is perfect for offices and retail. 6500K is now a color which can be used as a mainstream color, the HCRI no longer has strong blue tones and is ideal for ultra cool environments. Reds, greens, and blues look clean and sharp thanks to our own Phosphor mix and high CRI. Colors are crisp and sharp. Ideal for all applications which require a high-quality incandescent look. The high CRI for all of our models, which is our standard, creates great cove illumination no matter what color temperature is chosen.

The fixture incorporates an integral, patented, toolless self-locking bracket which slides into any position and turns 170 degrees. Built-in male & female connectors with thumb latch connections for fast installation time. Lightweight aluminum construction for durability and excellent thermal characteristics. Quality American made electronic components. Available in a tiny 6 inch size (15cm) for tight turning coves and to finish a small space on the end of a run. 1ft and 4ft lengths are for fast installation saving expensive labor installation costs and achieving long runs of quality illumination in rapid time.

Tested by Intertek to UL1598 for use in USA & Canada. CE Approved. WEE. RoHS Compliant. TM-30-15 Tested. US Patent No. D787,112 and D783,890. Title 24, JA8-2019.

Product Innovation Award (PIA) Winner 2016 for Best Luminaire. LFI Innovation Award 2017 Finalist for Dynamic Color, Theatrical, Cove, Strips and Tape. Lux Award Commended for Interior Product of the Year 2016. Darc Awards Finalist for Best Architectural Lighting Product - Interior Luminaires 2016. International Design Excellence Award for Innovative Product Design Finalist 2016.

Designed & Developed by MODA LIGHT in Las Vegas, USA.

PAGE

<b>3</b>	FEATURES
<b>4</b>	1 FOOT
<b>5</b>	1 FOOT POLAR CANDELA
<b>6</b>	1 FOOT ILLUMINANCE AT DISTANCE
<b>7</b>	4 FOOT
<b>8</b>	4 FOOT POLAR CANDELA
<b>9</b>	4 FOOT ILLUMINANCE AT DISTANCE
<b>10</b>	TM30
<b>11</b>	TM30
<b>12</b>	TM30/R VALUES/CHROMATICITY
<b>13</b>	0-10V WIRING
<b>14</b>	GRAZING
<b>15</b>	ACCESSORIES: MOUNTING TRACK
<b>16</b>	ACCESSORIES: ASYMMETRIC LOUVER
<b>17</b>	ACCESSORIES: SYMMETRIC LOUVER
<b>18</b>	ACCESSORIES: HONEYCOMB LOUVER
<b>19</b>	ACCESSORIES: BLADE LOUVER
<b>20</b>	ACCESSORIES: CABLES
<b>21</b>	FIXTURES & ACCESSORIES
<b>22</b>	FIXTURES & ACCESSORIES

## PHYSICAL

Dimensions	L: 12in (304mm) L: 48in (1219mm)	W: 1 13/16in (46mm) H: 1 3/16in (30mm)
Weights	1ft: 0.38 lbs (0.17kg) 4ft: 1.22 lbs (0.55 kg)	
Applications	Graze, Accent & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	MODA Aluminum Heat Sink	
Beam Angle	30° X 100°	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

## OUTPUT

CCT	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
SDCM	2 Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
CRI	95 - 98
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

## DIMMING

	Outputs Available
1 FT	SO, HO
4 FT	SO, HO

## MODA TECHNOLOGY

moda SOFTWARE™

moda HARDWARE™

moda DIM™

moda LED™

moda MICRO DRIVER™

moda PHOSPHOR™

moda ZERO BIN™

moda THERMAL MANAGEMENT™

moda HIGH CRI™

moda AIRFLOW™

moda COLOR RENDITION™

moda LOCK™

moda KWIK CONNECT™

moda LINEAR OPTIC™

## STANDARDS & CERTIFICATIONS




**Certification** Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant. Title 24, JAB-2019\*

**Class** 1

**Warranty** 5 Year Limited Warranty

\*CCT's 2200K - 4000K

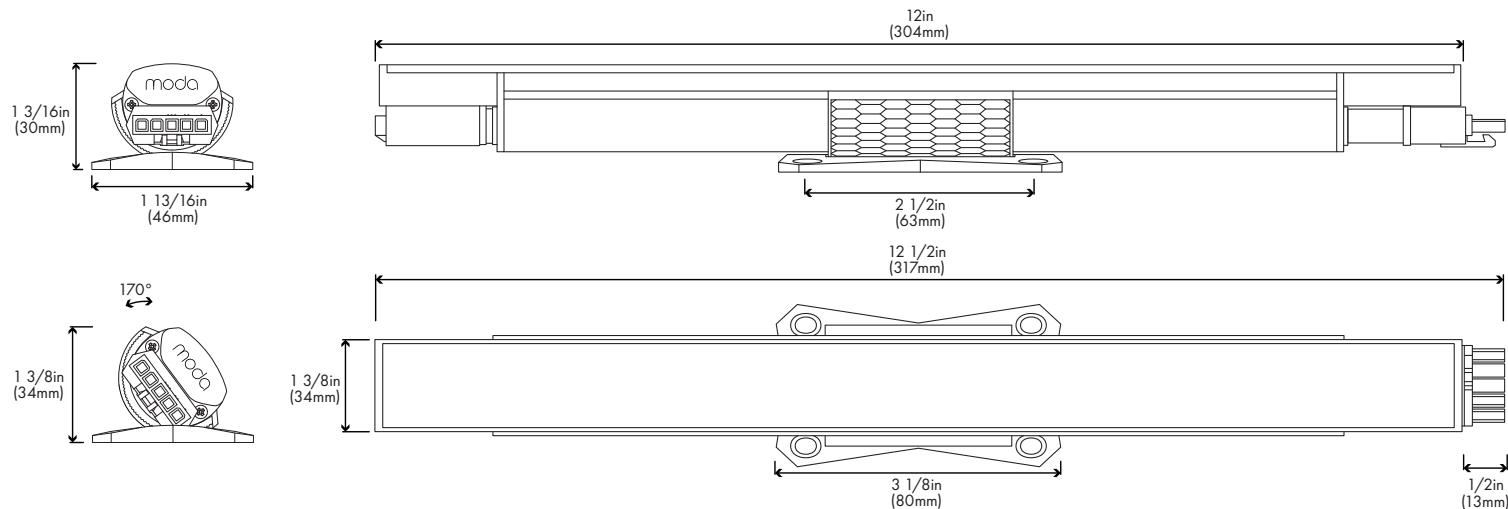

## 0-10V

Standard Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
1800K	263	95	52.60	44.58	40.46
2200K	302	96	60.40	51.19	46.46
2700K	400	98	80.00	67.80	61.54
3000K	430	97	86.00	72.88	66.15
3500K	438	98	87.60	74.24	67.38
4000K	449	96	89.80	76.10	69.08
6500K	651	98	130.20	110.34	100.15

High Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
1800K	526	95	55.96	53.13	52.60
2200K	603	96	64.15	60.91	60.30
2700K	801	98	85.21	80.91	80.10
3000K	859	97	91.38	86.77	85.90
3500K	875	98	93.09	88.38	87.50
4000K	899	96	95.64	90.81	89.90
6500K	1253	98	133.30	126.57	125.30

### SO Power Consumption

120V	4.7W
240V	5.5W
277V	5.8W

### SO Max Continuous Run

120V AC	120 ft
240V AC	240 ft
277V AC	240 ft

### HO Power Consumption

120V	9.4W
240V	9.9W
277V	10W


### HO Max Continuous Run

120V AC	50 ft
240V AC	100 ft
277V AC	100 ft


Dependent on dimming system limitations.

## STANDARD OUTPUT


**SO 1800K**

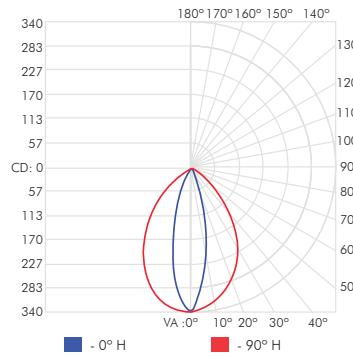


**SO 2200K**

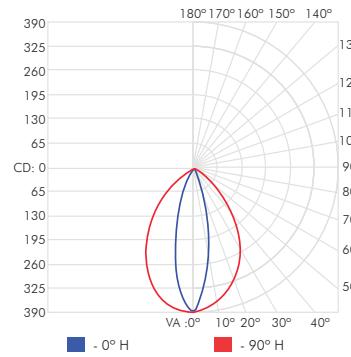


**SO 2700K**

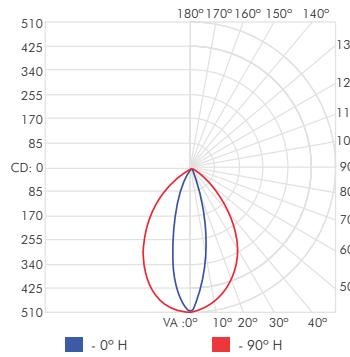


**SO 3000K**

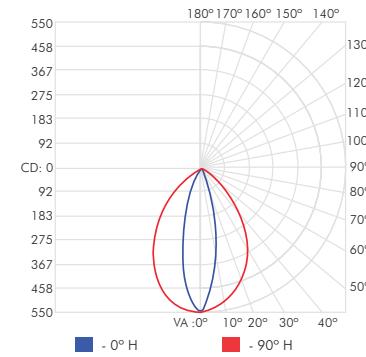


**SO 3500K**

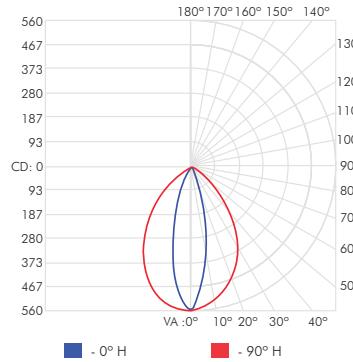

**SO 4000K**

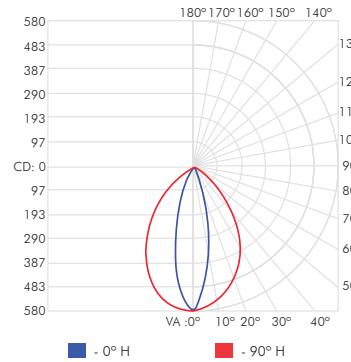


**SO 6500K**

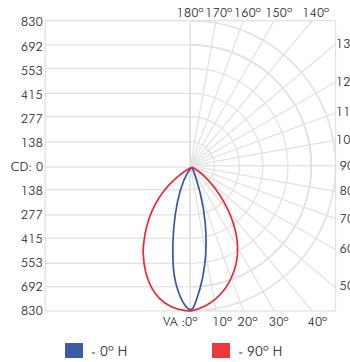


## HIGH OUTPUT


**HO 1800K**

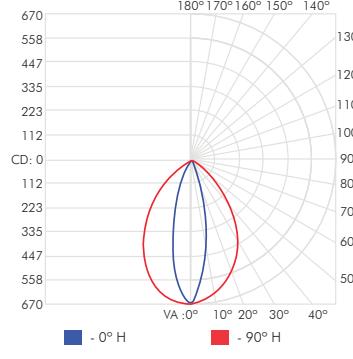


**HO 2200K**

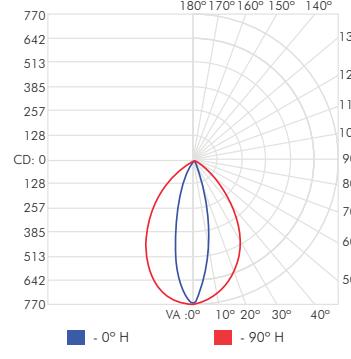


**HO 2700K**

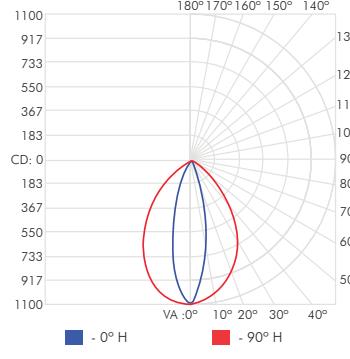


**HO 3000K**

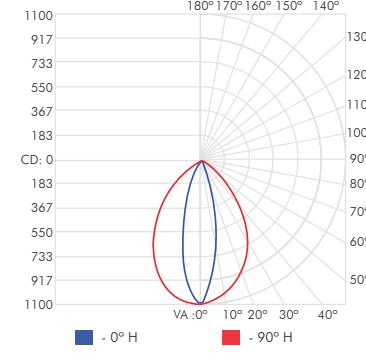


**HO 3500K**

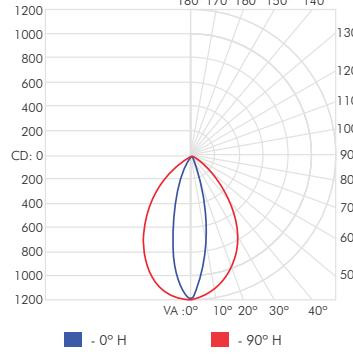

**HO 4000K**

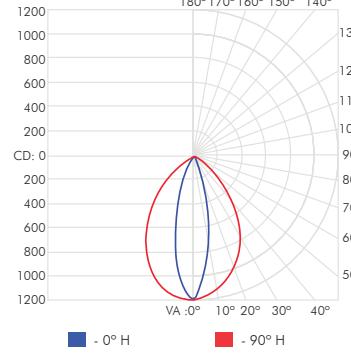


**HO 6500K**

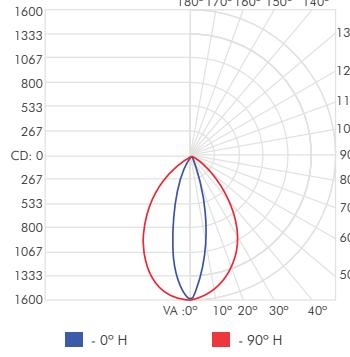



Due to continuous improvements and innovations, specifications may change without notice.  
Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

## STANDARD OUTPUT

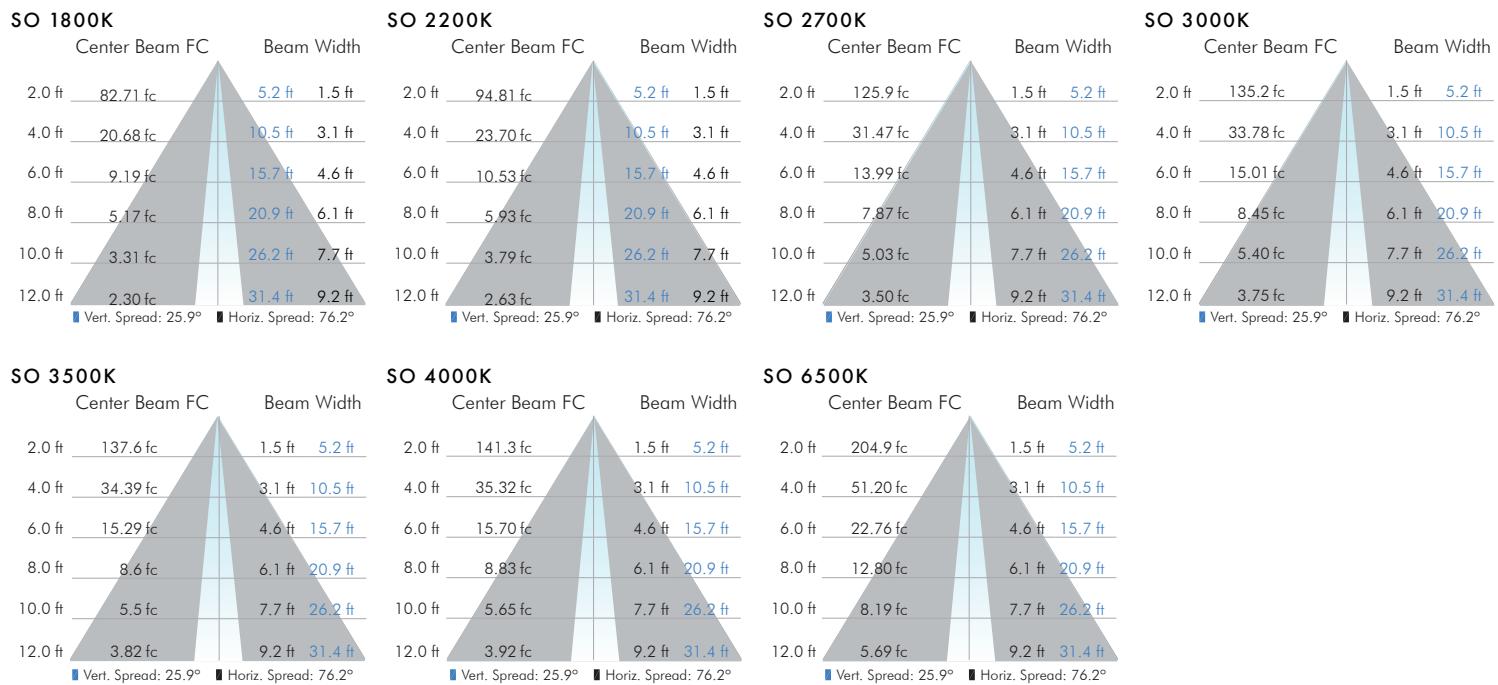

## HIGH OUTPUT

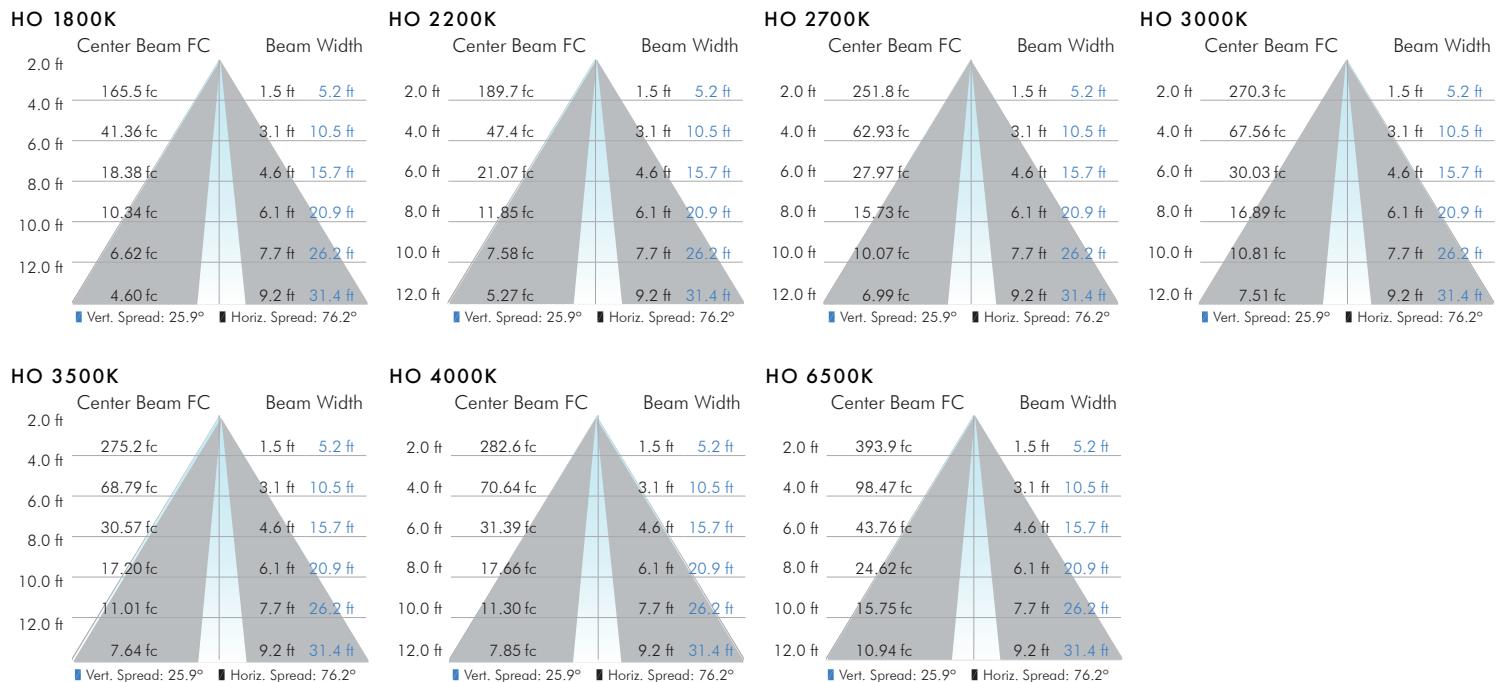

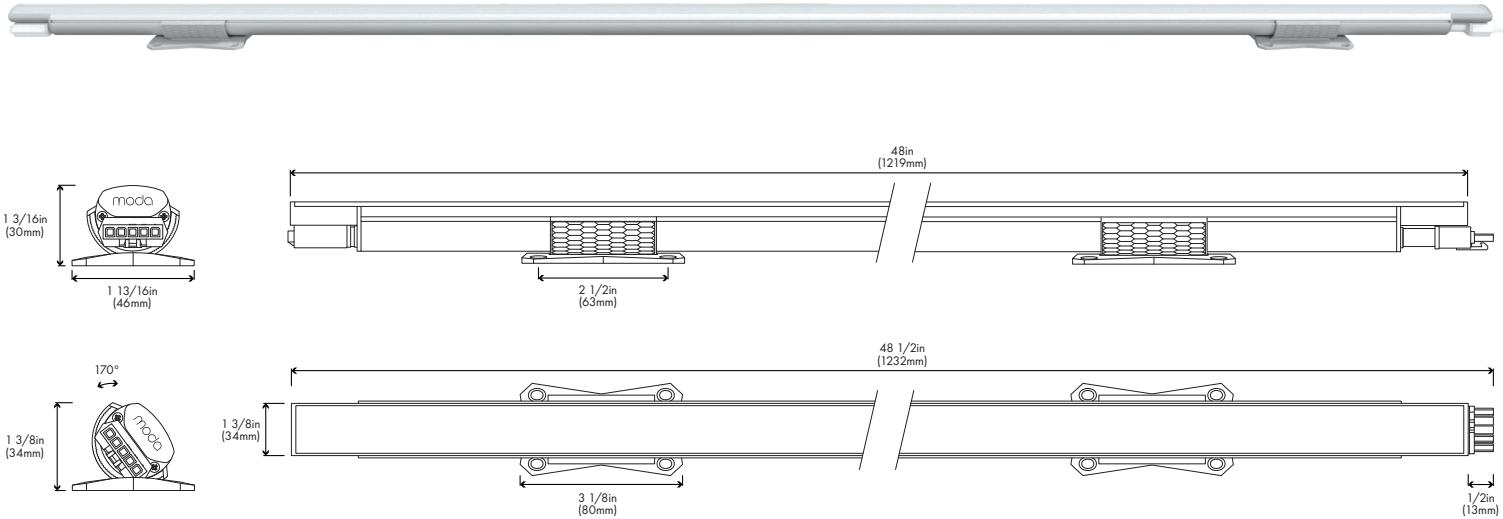

## 0-10V

Standard Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
1800K	1052	95	59.44	54.51	53.95
2200K	1214	96	68.59	62.90	62.26
2700K	1592	98	89.94	82.49	81.64
3000K	1627	97	91.92	84.30	83.44
3500K	1692	98	95.59	87.67	86.77
4000K	1749	96	98.81	90.62	89.69
6500K	2505	98	141.53	129.79	128.46


SO Power Consumption	SO Max Continuous Run	
120V	17.7W	120V AC      120 ft
240V	19.3W	240V AC      240 ft
277V	19.5W	277V AC      240 ft

High Output	Lumens	CRI	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
1800K	2104	95	56.86	55.36	53.94
2200K	2428	96	65.62	63.89	62.17
2700K	3183	98	86.02	83.76	81.61
3000K	3253	97	87.91	85.60	83.41
3500K	3384	98	91.45	89.05	86.76
4000K	3503	96	94.67	92.18	89.82
6500K	5010	98	135.40	131.84	128.46


HO Power Consumption	HO Max Continuous Run	
120V	37W	120V AC      50 ft
240V	38W	240V AC      100 ft
277V	39W	277V AC      100 ft

## STANDARD OUTPUT


**SO 1800K**

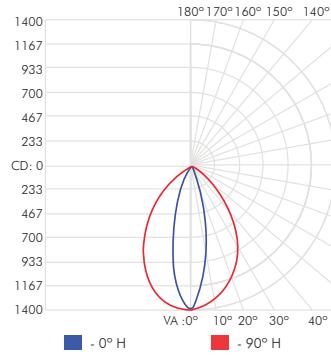


**SO 2200K**

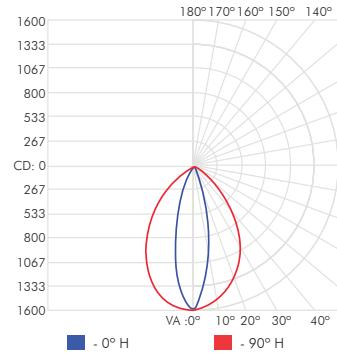


**SO 2700K**

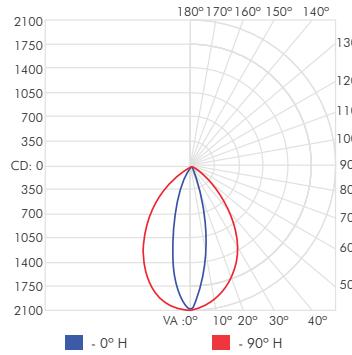


**SO 3000K**

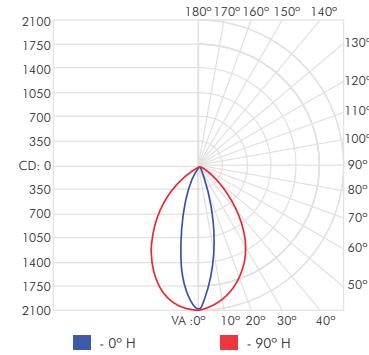


**SO 3500K**

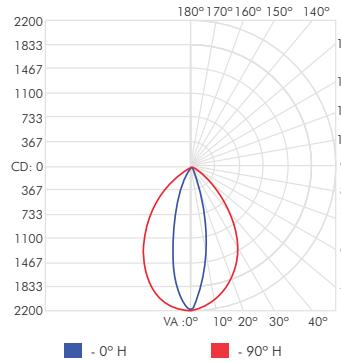

**SO 4000K**

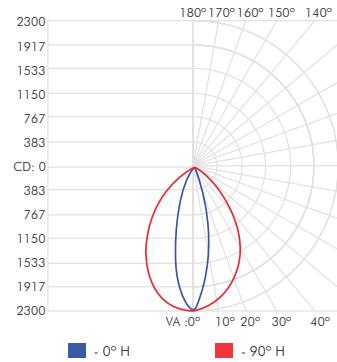


**SO 6500K**

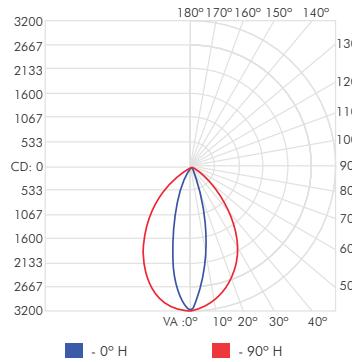


## HIGH OUTPUT


**HO 1800K**

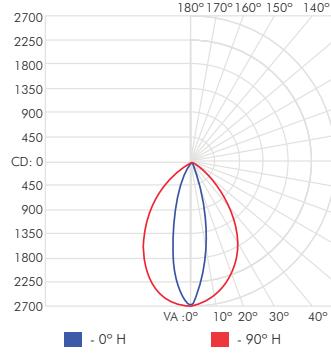


**HO 2200K**

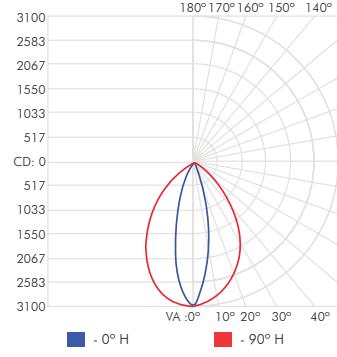


**HO 2700K**

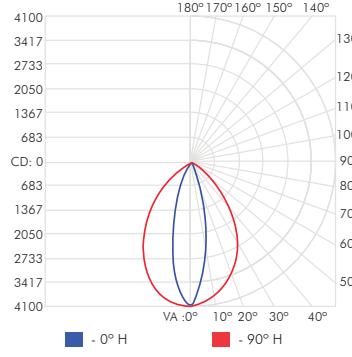


**HO 3000K**

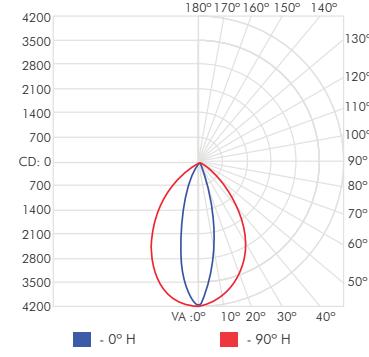


**HO 3500K**

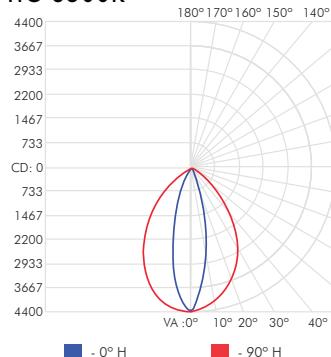

**HO 4000K**

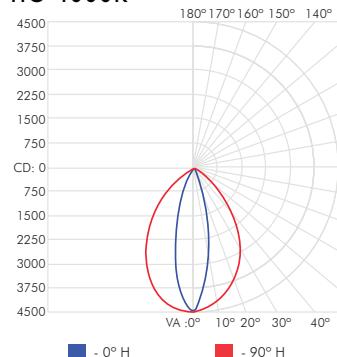


**HO 6500K**

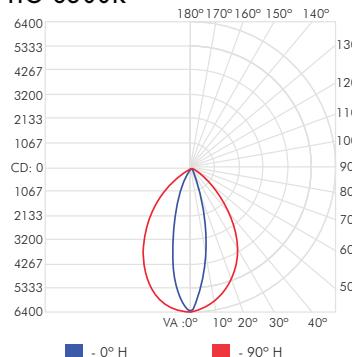


Due to continuous improvements and innovations, specifications may change without notice.  
Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.


## STANDARD OUTPUT

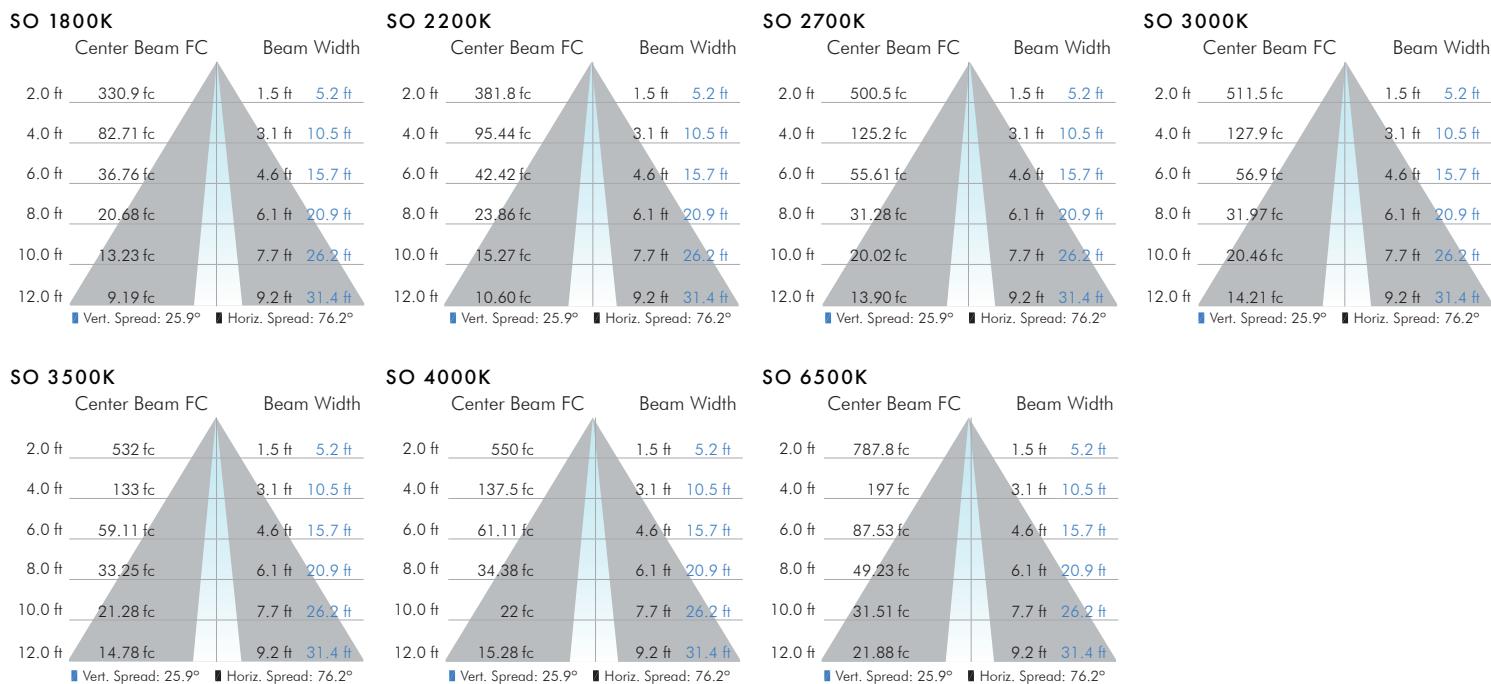


## HIGH OUTPUT

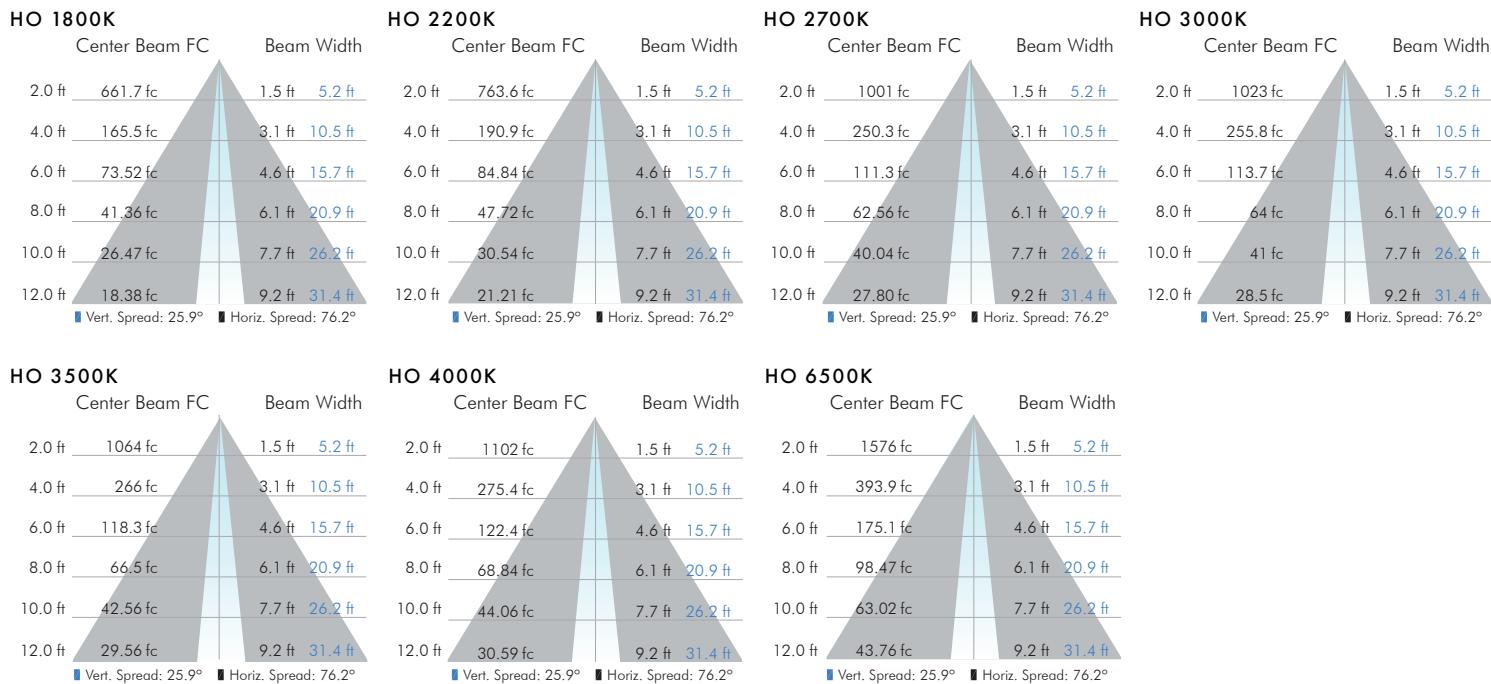


1800K TM30

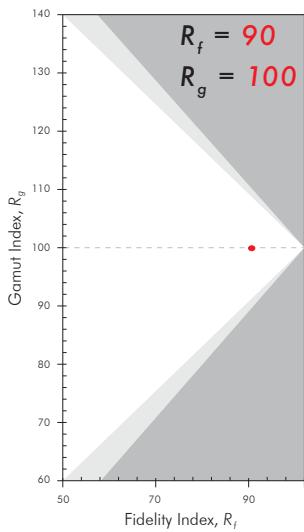


Color Evaluation Sample

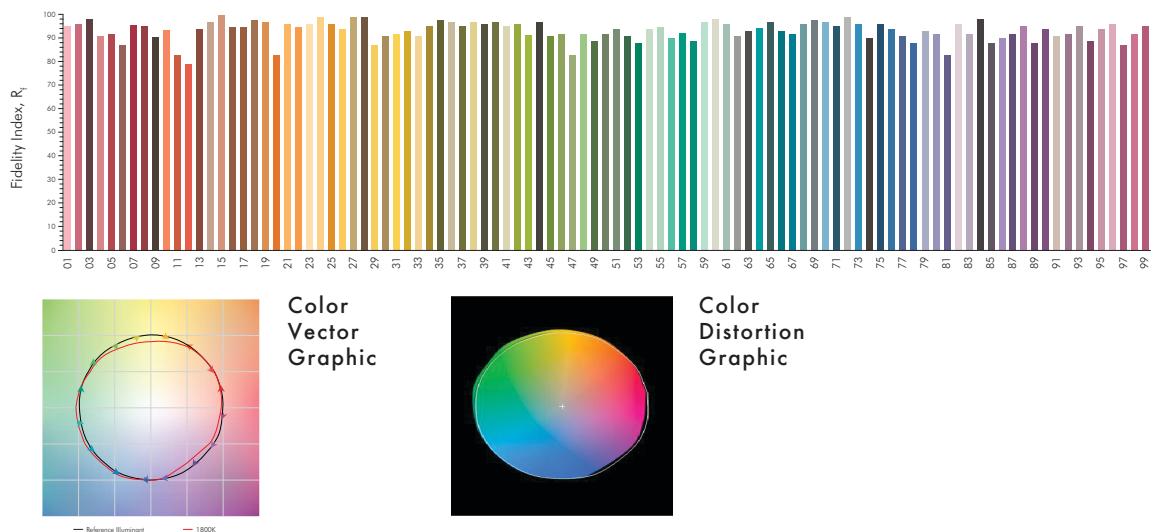


2200K TM30

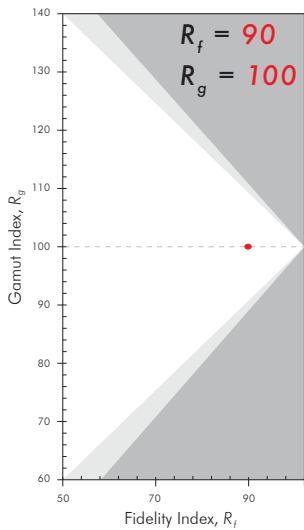


Color Evaluation Sample

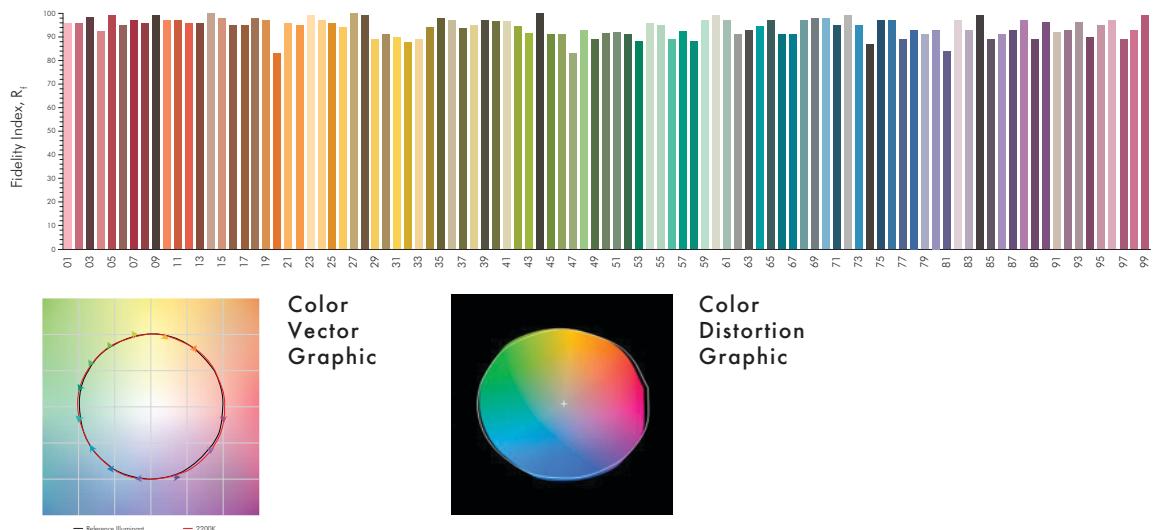

2700K TM30

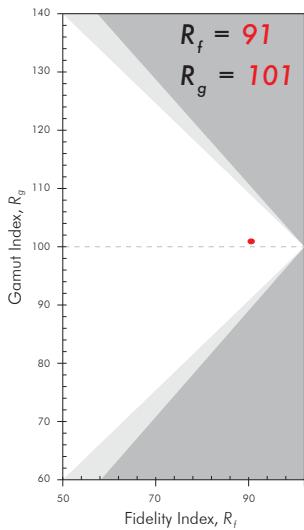


Color Evaluation Sample


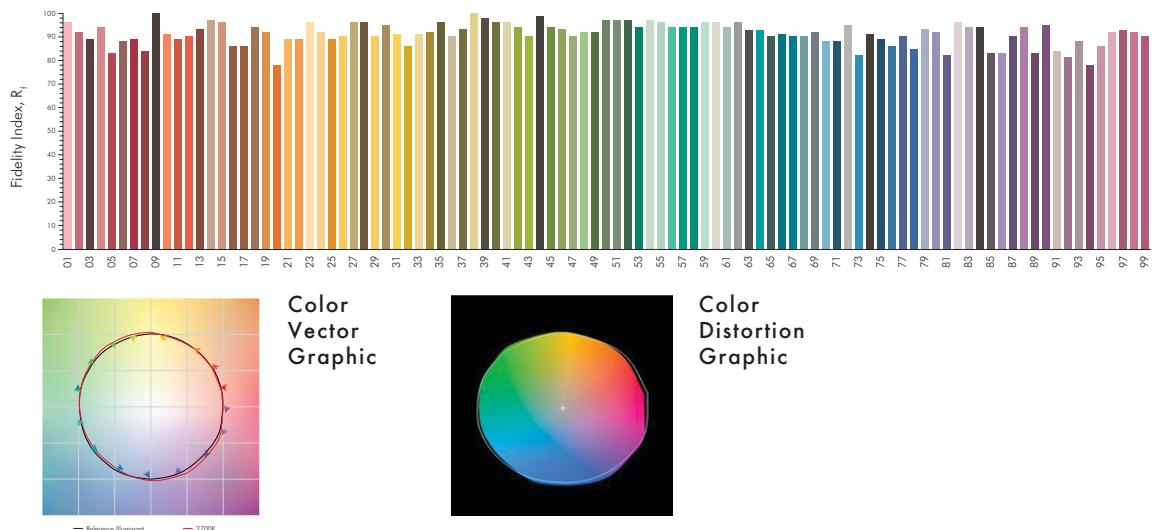


Due to continuous improvements and innovations, specifications may change without notice.  
Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

3000K TM30

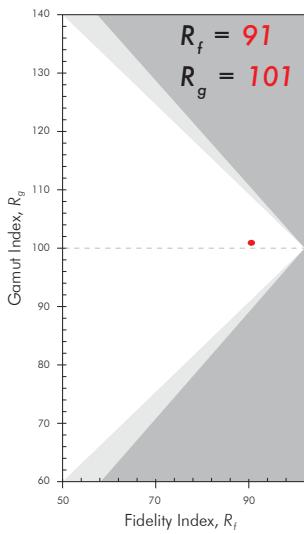

Color Evaluation Sample

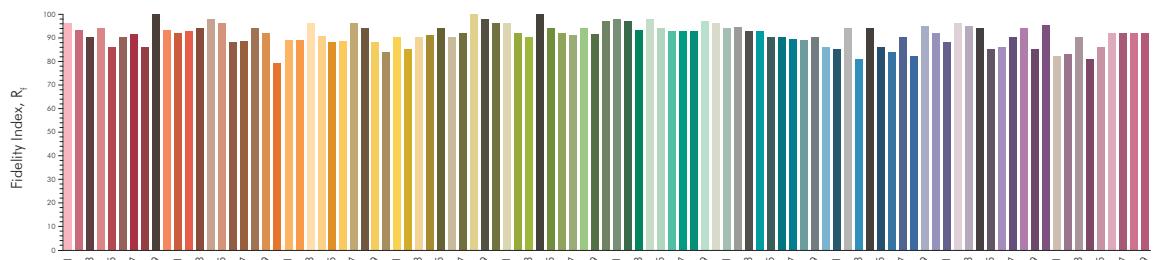


Color  
Vector  
Graphic





Color  
Distortion  
Graphic


3500K TM30

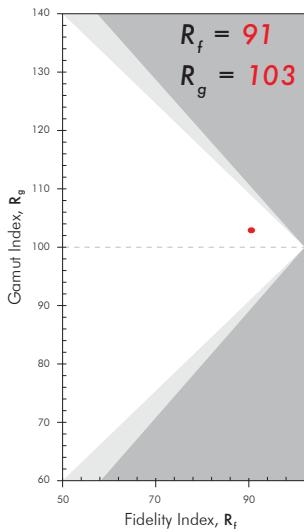

Color Evaluation Sample

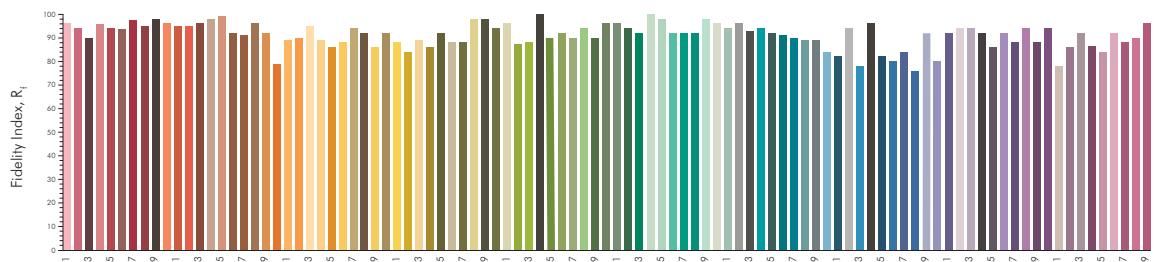


Color  
Vector  
Graphic





Color  
Distortion  
Graphic

4000K TM30

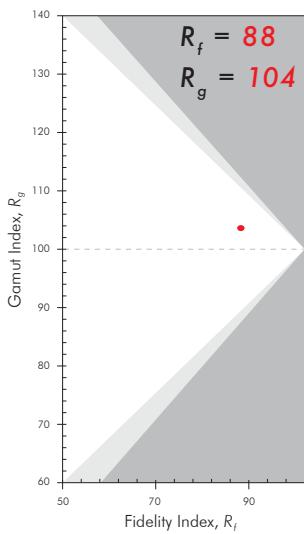

Color Evaluation Sample

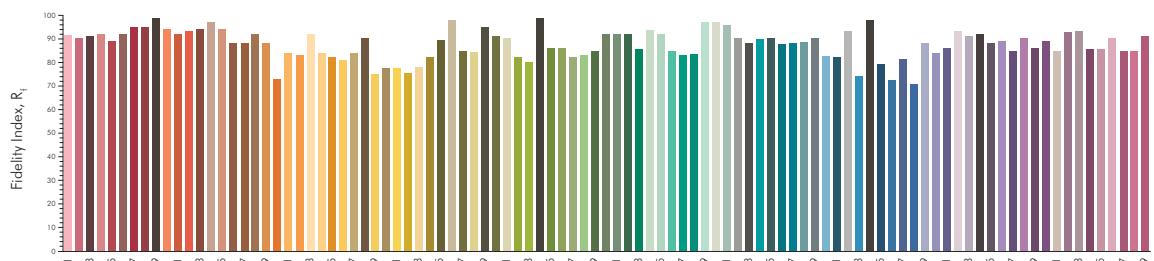


Color  
Vector  
Graphic




Color  
Distortion  
Graphic

Due to continuous improvements and innovations, specifications may change without notice.  
Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

### 6500K TM30

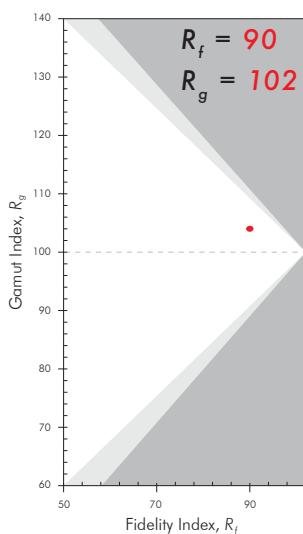


### Color Evaluation Sample

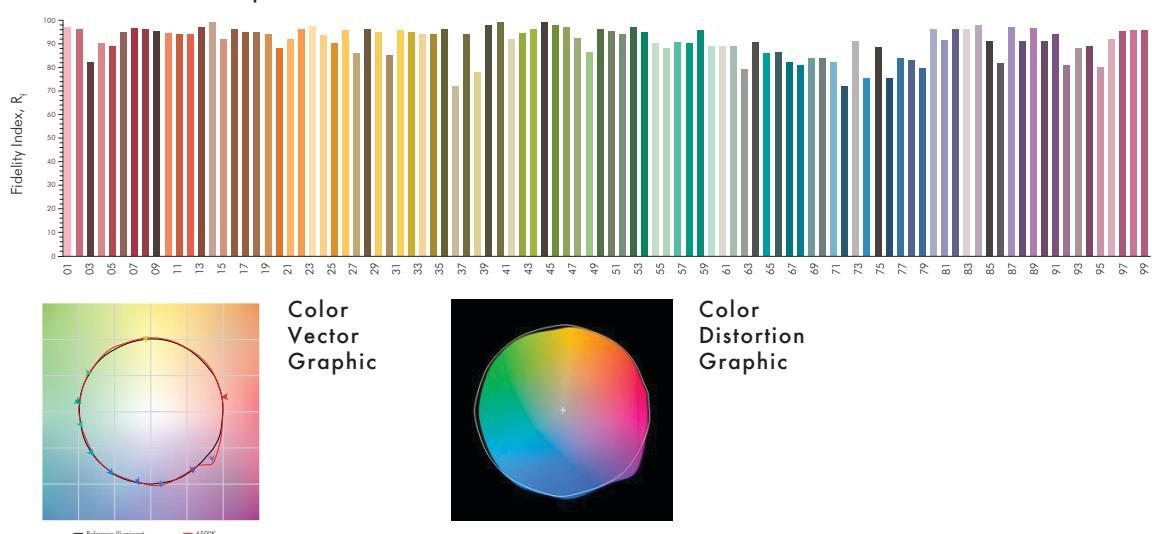

### R VALUES


	1800K	2200K	2700K	3000K	3500K	4000K	6500K
R1	98	97	99	98	99	98	98
R2	99	98	99	98	99	98	98
R3	97	97	97	95	97	98	98
R4	98	94	99	98	99	93	94
R5	96	96	99	97	99	95	95
R6	96	94	97	96	97	95	96
R7	95	97	97	97	97	94	95
R8	94	97	95	94	95	94	95
R9	93	93	93	91	93	95	96
R10	97	98	98	92	98	99	99
R11	97	90	97	97	97	94	95
R12	88	92	87	83	87	70	70
R13	98	97	99	98	99	98	99
R14	95	96	97	96	97	99	99
R15	97	99	98	96	98	95	96

### CIE 1931 CHROMATICITY DIAGRAM

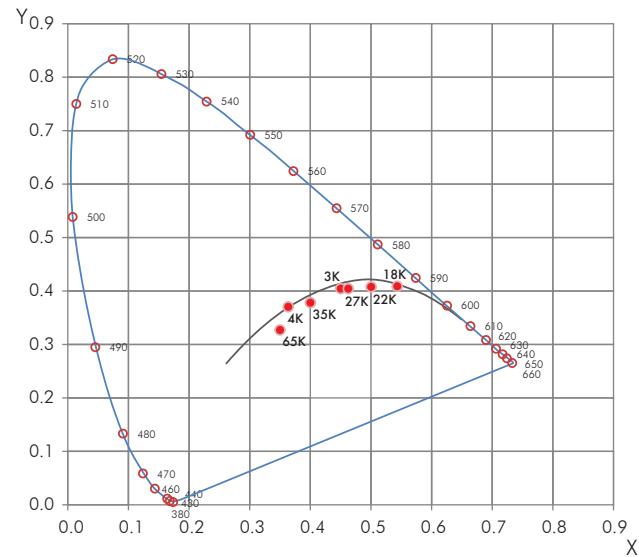


### CCT Coordinates

CCT	x:	y:	u:	v:
1800K	x: 0.5426	y: 0.4092	u: 0.3012	v: 0.5428
2200K	x: 0.5043	y: 0.4090	u: 0.2924	v: 0.5353
2700K	x: 0.4563	y: 0.4048	u: 0.2628	v: 0.5246
3000K	x: 0.4373	y: 0.4044	u: 0.2507	v: 0.5216
3500K	x: 0.4085	y: 0.3875	u: 0.2391	v: 0.5104
4000K	x: 0.3797	y: 0.3730	u: 0.2240	v: 0.4952
6500K	x: 0.3296	y: 0.3249	u: 0.1832	v: 0.4328

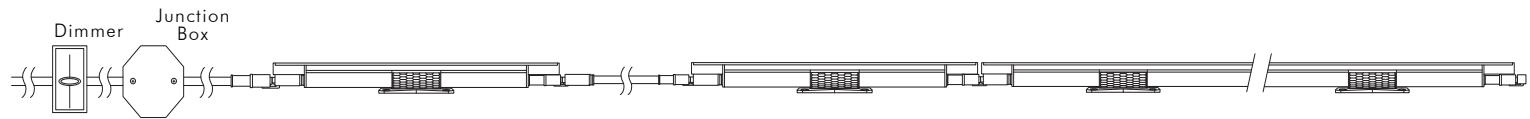

UL / cUL Dimming

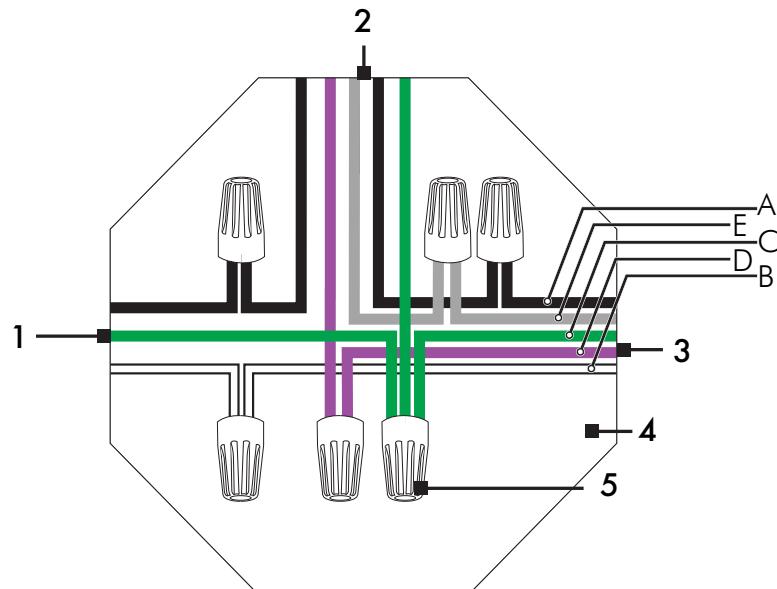

**Wiring Legend**


1	Power 100-277V AC
2	0-10V Dimmer
3	5 Pin Leader Cable
4	Junction Box
5	Wiring Nuts

**5 Pin Leader Cable**


	UL/cUL	CE/CCC*
A Live 100-277V AC	— Black	— Brown
B Neutral	— White	— Blue
C Ground	— Green	— Green/Yellow
D Data Positive	— Purple	— Black
E Data Negative	— Gray	— Gray

\*Not illustrated


**0-10V Connectors**

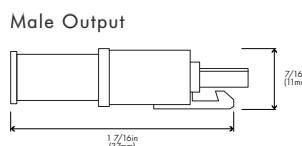

**Angle Adjustment**

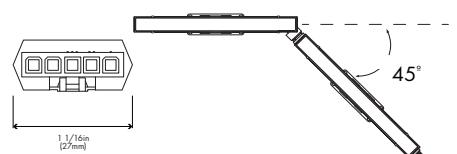


**Female Output**

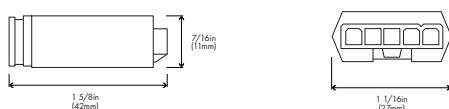


**Compatible Dimmers**

Please visit our website for a list of compatible dimmers.

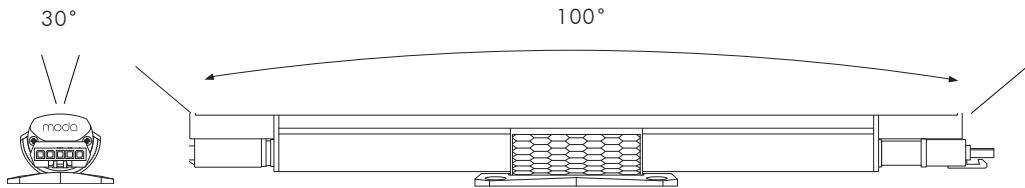

### Wallwash Optic.


Wall wash any indoor application with its integral linear optic of 30° x 100° for a precise beam pattern with no color over angle, no striations and no dark spots up to 20ft (6m).

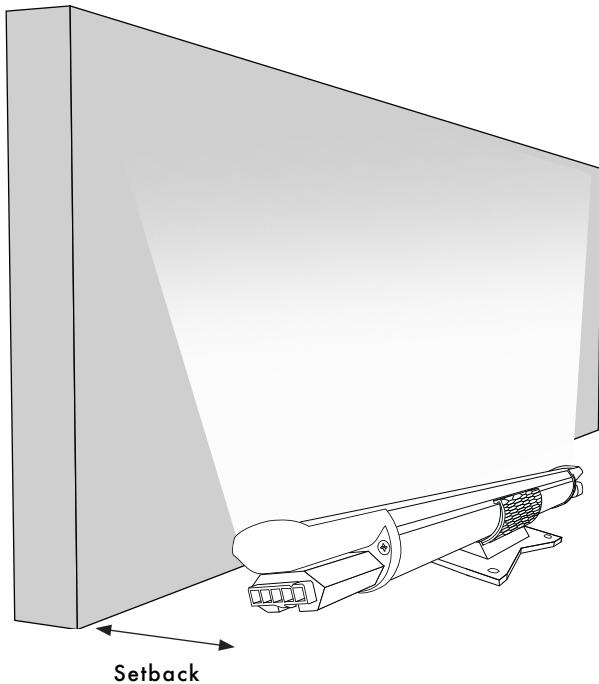

### Setback Chart

10ft Wall                    1 ft

**Recommended Setback from wall is 1/10 of wall height.**

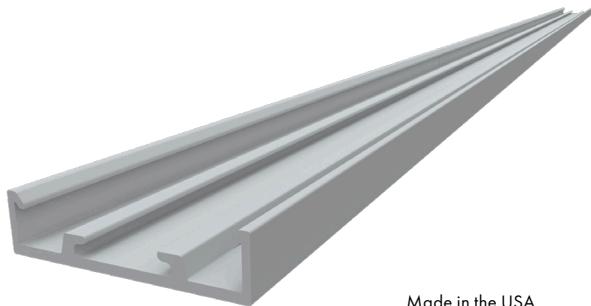

Made in the USA

## MODA MINI COVE MOUNTING TRACK

### MOUNTING MINI COVE

Allows users to install Moda Mini Cove fixtures in a continuous linear position. Moda Mini Cove Mounting Tracks come packaged in 5 pieces of 4ft sections to create a continuous run of 20ft.

Made in the USA.

### Options

Finish G - Gray

Length 4ft - 4ft Sections

Quantity 5 Pieces (20ft)

### Physical

Applications Cove, Accent

Construction ABS Plastic



## MODA MINI COVE TRACK CONNECTOR

Joins two pieces of track together.

### Accepts screw sizes







Drywall	#6	#8
---------	----	----



Self tapping	#6	#8
--------------	----	----

Concrete Anchor	3/16in
-----------------	--------

(By others)

## ACCESSORIES: MOUNTING TRACK

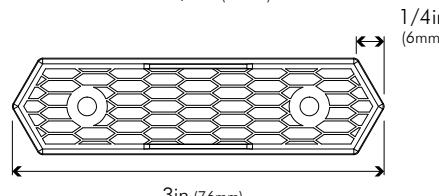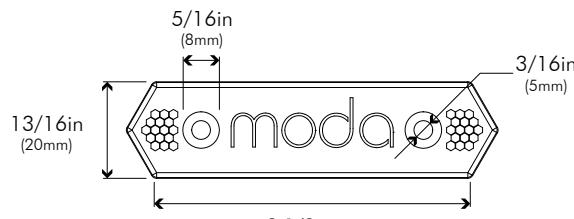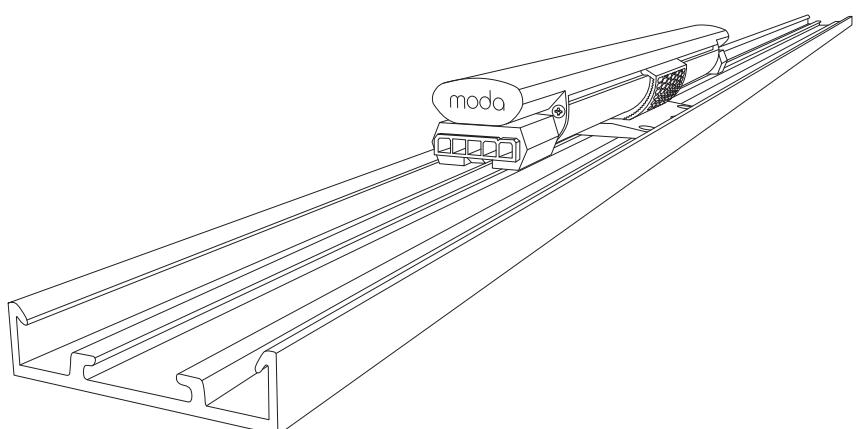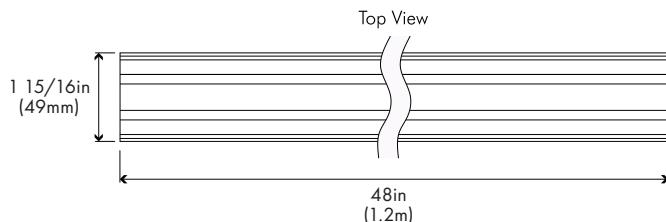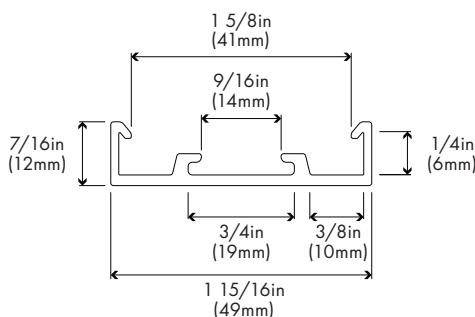

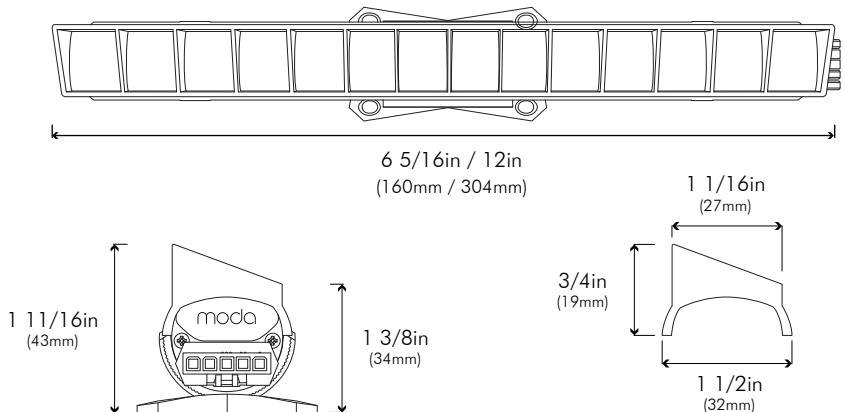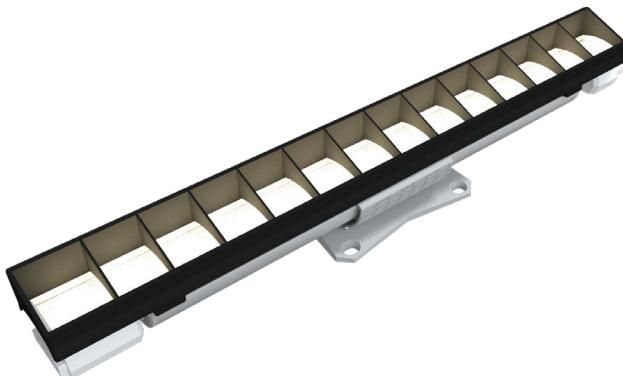

### MODA MINI COVE LOUVERS

#### ASYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

#### Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

#### Options


Finish                    B - BLACK


Length                  1FT

#### Physical

Applications            Cove, Accent, Graze

Construction           ABS

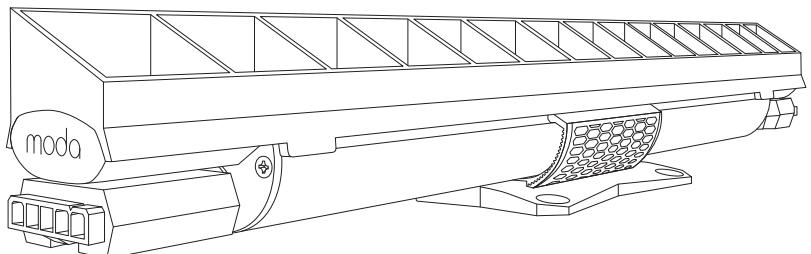

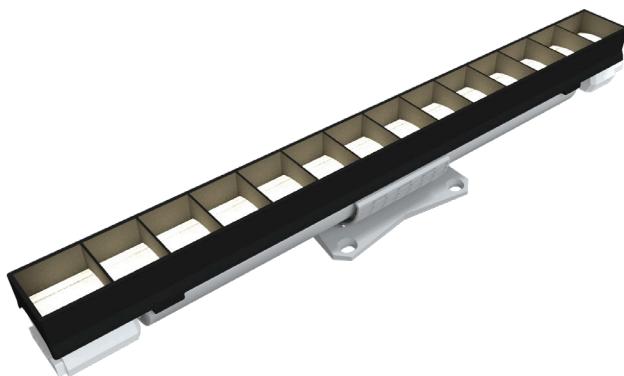

### MODA MINI COVE LOUVERS

#### SYMMETRIC

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

#### Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

#### Options



Finish                    B - BLACK


Length                  1FT

#### Physical

Applications            Cove, Accent, Graze

Construction           ABS

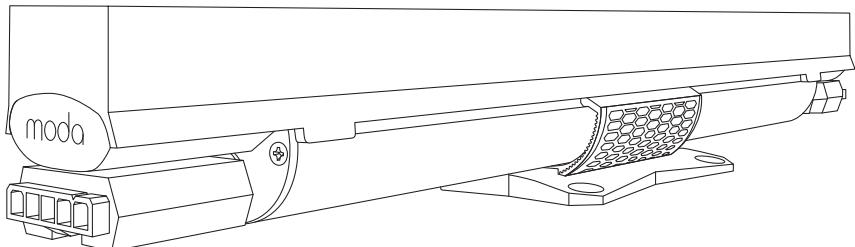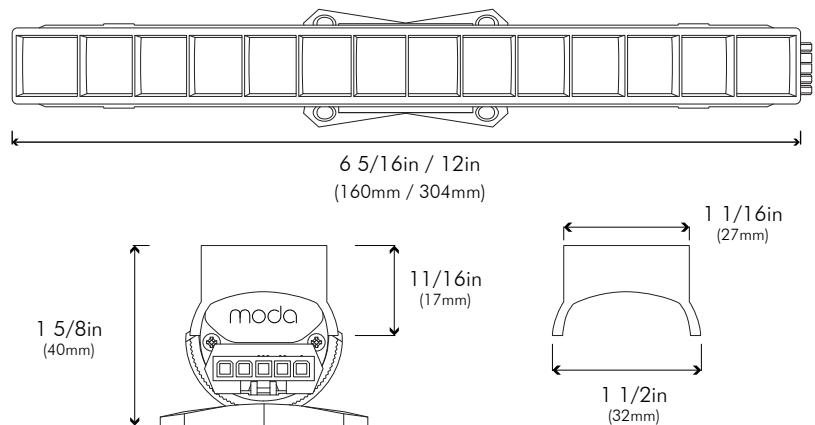

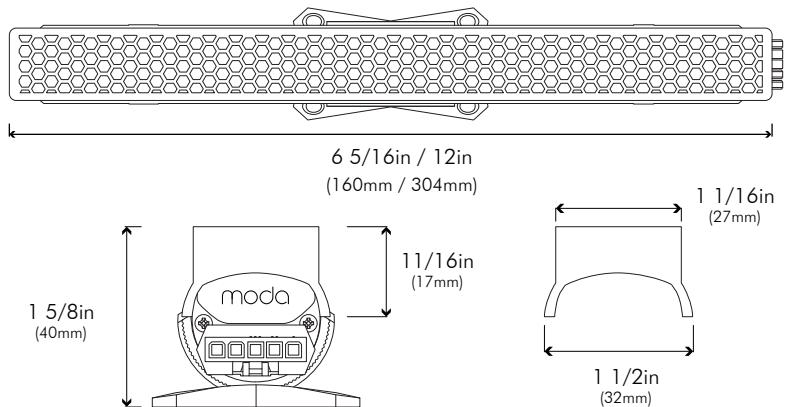

## MODA MINI COVE LOUVERS HONEYCOMB

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. Use four 1ft louvers for a 4ft fixture.

### Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected


### Options


Finish	B - BLACK
Length	1FT

### Physical

Applications	Cove, Accent, Graze
--------------	---------------------

Construction	ABS
--------------	-----

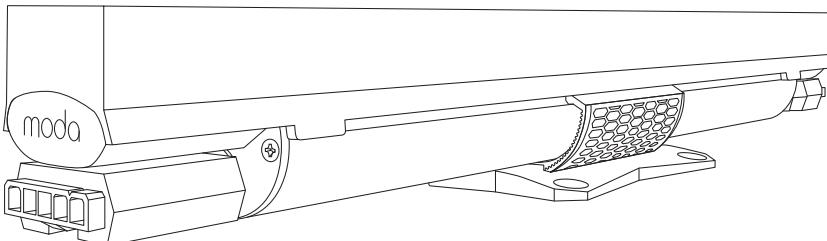

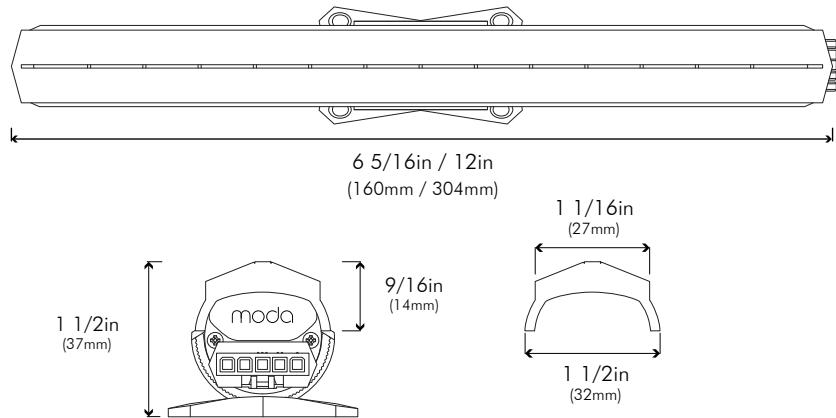

## MODA MINI COVE LOUVERS BLADE

Add visual interest to any space by creating a narrow line of light, which can be seen in semi direct view or reflected off the wall or ceiling when integrated into a cove or niche. Use four 1ft louvers for a 4ft fixture.


### Features

- Convenient 1ft sections
- Snap on assembly
- Toolless installation
- UV protected

### Options

Finish	B - BLACK
Length	1FT

Physical Applications	Cove, Accent, Graze
Construction	ABS

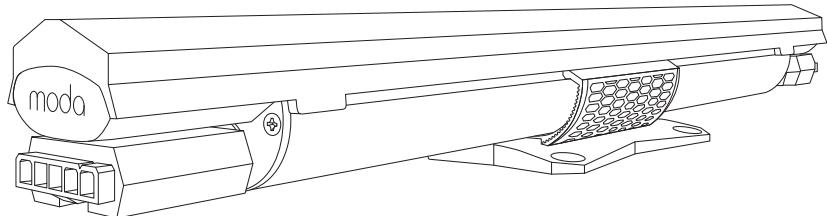


## 0-10V LEADER CABLES


### Moda Mini Cove Interior 5 Pin Leader Cables

	UL/cUL	EU/CCC
Lengths	10ft and 25ft	3m and 10m
Color	White	White


UL/cUL | EU/CCC  
10FT or 25FT | 3M or 10M Male Connector

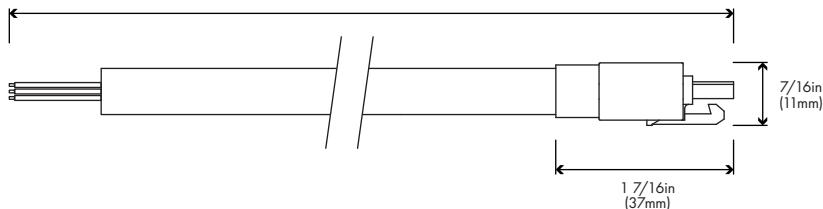

#### Male Connector

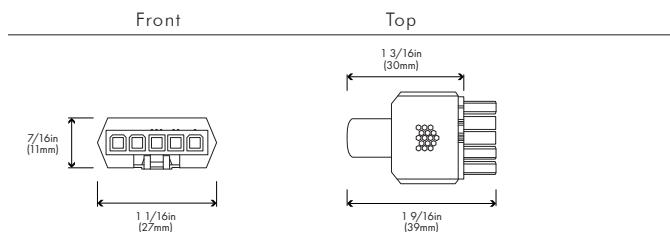

#### Pin Assignment



UL/cUL EU/CCC


1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/Yellow
4	Data Positive	Purple	Black
5	Data Negative	Gray	Gray

## 0-10V JUMPER CABLES


### Moda Mini Cove Interior 5 Pin Jumper Cables

	UL/cUL	EU/CCC
Lengths	1ft and 4ft	300mm and 1m
Color	White	White


Female Connector UL/cUL | EU/CCC  
10FT or 25FT | 3M or 10M Male Connector

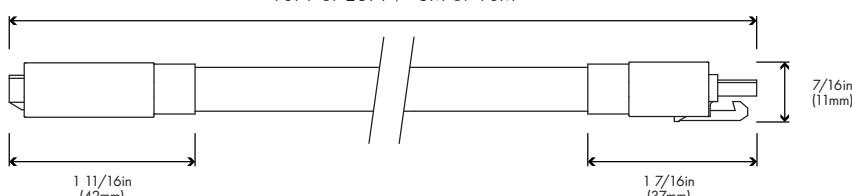

#### Connectors

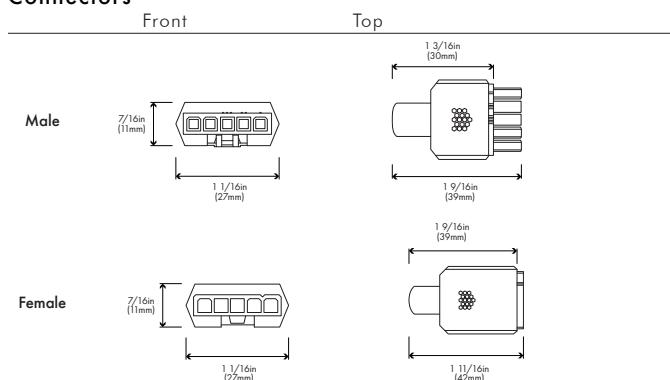


#### Pin Assignment



UL/cUL EU/CCC

1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/Yellow
4	Data Positive	Purple	Black
5	Data Negative	Gray	Gray



Female

UL/cUL EU/CCC

1	Data Negative	Gray	Gray
2	Data Positive	Purple	Black
3	Ground	Green	Green/Yellow
4	Neutral	White	Blue
5	Live 100-277V	Black	Brown

Due to continuous improvements and innovations, specifications may change without notice.  
Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

	Fixture	Part Number	Ordering SKU
0-10V SO 1FT	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 1800K HCRI 1FT 30X100	MMGI-S-S-0-18H-1-310	135-1001
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2200K HCRI 1FT 30X100	MMGI-S-S-0-22H-1-310	135-1003
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2700K HCRI 1FT 30X100	MMGI-S-S-0-27H-1-310	135-1005
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3000K HCRI 1FT 30X100	MMGI-S-S-0-30H-1-310	135-1006
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3500K HCRI 1FT 30X100	MMGI-S-S-0-35H-1-310	135-1008
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 4000K HCRI 1FT 30X100	MMGI-S-S-0-40H-1-310	135-1009
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 6500K HCRI 1FT 30X100	MMGI-S-S-0-65H-1-310	135-1014
0-10V HO 1FT	Moda Mini Graze Interior High Output Silver 0-10V Dimming 1800K HCRI 1FT 30X100	MMGI-H-S-0-18H-1-310	135-1201
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2200K HCRI 1FT 30X100	MMGI-H-S-0-22H-1-310	135-1203
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2700K HCRI 1FT 30X100	MMGI-H-S-0-27H-1-310	135-1205
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3000K HCRI 1FT 30X100	MMGI-H-S-0-30H-1-310	135-1206
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3500K HCRI 1FT 30X100	MMGI-H-S-0-35H-1-310	135-1208
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 4000K HCRI 1FT 30X100	MMGI-H-S-0-40H-1-310	135-1209
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 6500K HCRI 1FT 30X100	MMGI-H-S-0-65H-1-310	135-1214
0-10V SO 4FT	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 1800K HCRI 4FT 30X100	MMGI-S-S-0-18H-4-310	135-3001
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2200K HCRI 4FT 30X100	MMGI-S-S-0-22H-4-310	135-3003
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2700K HCRI 4FT 30X100	MMGI-S-S-0-27H-4-310	135-3005
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3000K HCRI 4FT 30X100	MMGI-S-S-0-30H-4-310	135-3006
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3500K HCRI 4FT 30X100	MMGI-S-S-0-35H-4-310	135-3008
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 4000K HCRI 4FT 30X100	MMGI-S-S-0-40H-4-310	135-3009
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 6500K HCRI 4FT 30X100	MMGI-S-S-0-65H-4-310	135-3014
0-10V HO 4FT	Moda Mini Graze Interior High Output Silver 0-10V Dimming 1800K HCRI 4FT 30X100	MMGI-H-S-0-18H-4-310	135-3201
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2200K HCRI 4FT 30X100	MMGI-H-S-0-22H-4-310	135-3203
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2700K HCRI 4FT 30X100	MMGI-H-S-0-27H-4-310	135-3205
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3000K HCRI 4FT 30X100	MMGI-H-S-0-30H-4-310	135-3206
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3500K HCRI 4FT 30X100	MMGI-H-S-0-35H-4-310	135-3208
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 4000K HCRI 4FT 30X100	MMGI-H-S-0-40H-4-310	135-3209
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 6500K HCRI 4FT 30X100	MMGI-H-S-0-65H-4-310	135-3214

ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Leader Cable US 5 Pin 10FT	Power to first fixture of run	MLCI-US-5PIN-W-10FT	299-0100
Leader Cable US 5 Pin 25FT	Power to first fixture of run	MLCI-US-5PIN-W-25FT	299-0102
Jumper Cable US 5 Pin 1FT	Connection between fixtures	MJCI-US-5PIN-W-1FT	299-1100
Jumper Cable US 5 Pin 4FT	Connection between fixtures	MJCI-US-5PIN-W-4FT	299-1102
Leader Cable EU 5 Pin 3M	Power to first fixture of run	MLCI-EU-5PIN-W-3M	299-0101
Leader Cable EU 5 Pin 10M	Power to first fixture of run	MLCI-EU-5PIN-W-10M	299-0103
Jumper Cable EU 5 Pin 300MM	Connection between fixtures	MJCI-EU-5PIN-W-300MM	299-1101
Jumper Cable EU 5 Pin 1M	Connection between fixtures	MJCI-EU-5PIN-W-1M	299-1103
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W	299-2100
Mounting Track 20FT	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G	299-3200
Mounting Track Connector	Interior Track Connector	N/A	299-3202
Symmetric Louver 1FT	Symmetric louver for light control	N/A	299-4230
Asymmetric Louver 1FT	Asymmetric louver for light control	N/A	299-4231
Honeycomb Louver 1FT	Honeycomb louver for light control	N/A	299-4232
Blade Louver 1FT	Blade louver for light control	N/A	299-4233