


Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

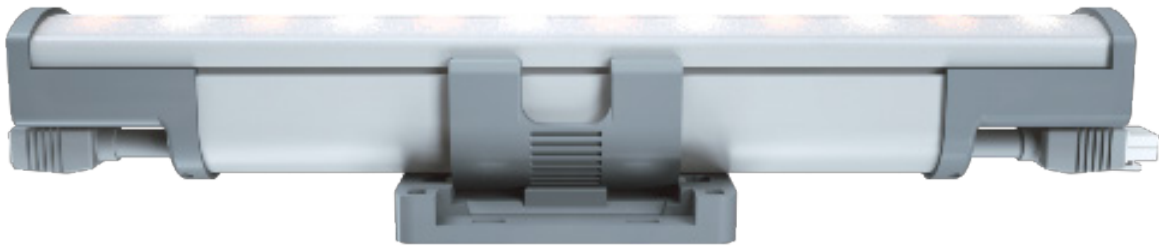

Specification Grade Premium Interior Cove Fixture.

MODA COVE Interior is a patent pending cove lighting system designed for interior applications. Utilizing MODA's latest DMX software, our onboard Microprocessor is uniquely programmed in-house with a firmware to receive DMX512 signals for full independent control of every 1ft section. Change the color temperature ranging from 1800K to 3000K and create a variety of moods. With MODA's methods of precision and high standards of work, MODA achieves perfect illumination. Color Rendering Index is at a MODA standard of 90-98. R1 - R15 values are in excess of 90. No striations, no color over angle, and no dark spots. 100-277V, 50/60Hz power input allows these fixtures to be installed anywhere in the world. New patent pending locking bracket rotates 180 degrees for a multitude of light directions. Rugged aluminum design. Fast installation is achieved with MODA KWIK CONNECT plugs and install-integral thumb latch connectors. Available in 1ft & 4ft sections. Series is designed for driver or light engine to be factory replaced at its end of life or recycled.

Designed and developed in Las Vegas, USA by MODA.

PAGE

3	FEATURES
4	1 FOOT
5	4 FOOT
6	DMX WIRING
7	ACCESSORIES: CABLES
8	FIXTURES & ACCESSORIES

PHYSICAL

Dimensions	L: 12 3/8in (318mm)	W: 2 7/16in (61mm)
	L: 47 5/16in (1202mm)	H: 2 3/8in (60mm)
Weight	12in: 1.0lbs (0.45kg)	
	48in: 3.1lbs (1.4kg)	
Applications	Cove, Accent, & Indirect General Illumination	
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Dry/Damp Location IP44	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)	
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)	
Humidity	0-95% Non Condensing	

SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
SO	730	2942	73.00	73.54
HO	1139	4590	113.90	114.76
HO+	1298	5233	130.83	129.86

POWER CONSUMPTION

	120V - 277V AC	
	1FT	4FT
SO/HO/HO+	10W	40W

POWER CONSUMPTION

	120V - 277V AC	
	1FT	4FT
SO/HO/HO+	10W	40W

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	DMX512
Power Factor	≥ 0.98

MAX CONTINUOUS RUN

	120V AC	277V AC
SO/HO/HO+	80ft	80ft

OUTPUT

CCT	1800K - 3000K*
Beam Angle	120°
CRI	95
SDCM	2 Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

*CCT 2200K - 3000K available only in HO

MODA TECHNOLOGY

moda**SOFTWARE**[™]

moda**HARDWARE**[™]

moda**DYNAMIC WARM**[™]

moda**PHOSPHOR**[™]

moda**HIGH CRI**[™]

moda**DMX**[™]

moda**DRIVER**[™]

moda**ZERO BIN**[™]

moda**THERMAL MANAGEMENT**[™]

moda**GUARD**[™]

moda**SEAL**[™]

moda**AIRFLOW**[™]


moda**COMMUNICATE**[™]

moda**KWIK CONNECT**[™]

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	3 Year Limited Warranty

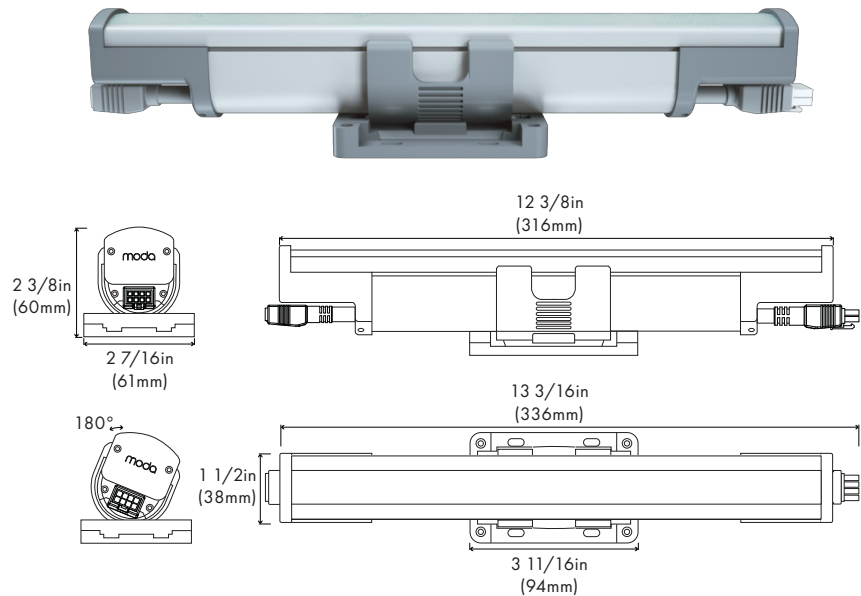


DMX

	Lumens	CRI	Efficacy
SO	629.62 - 730.00	95	62.96 - 73.00
HO	1001.40 - 1139.09	95	100.14 - 113.90
HO+	1141.68 - 1298.66	95	114.16 - 129.86


Power Consumption
120-277V AC 10W


Max Run Lengths
120-277V AC 80ft

Illuminance at a Distance

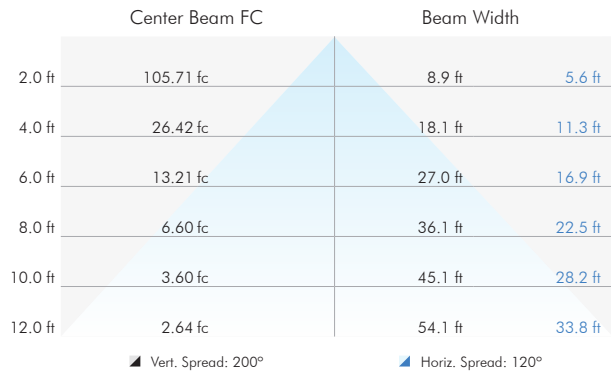

Polar Candela Distribution



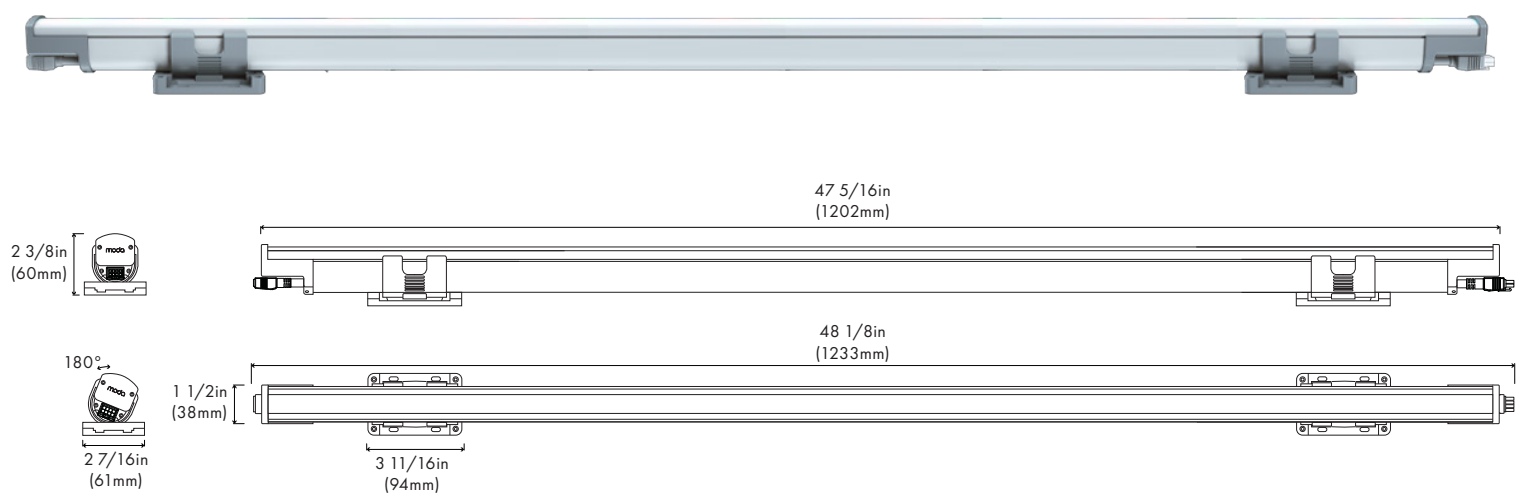

DMX

	Lumens	CRI	Efficacy
SO	2537.36 - 2941.90	95	63.43 - 73.54
HO	4035.64 - 4590.53	95	100.89 - 114.76
HO+	4600.97 - 5233.59	95	115.02 - 130.83


Power Consumption	Max Run Lengths
120-277V AC 40W	120-277V AC 80ft



Illuminance at a Distance

	Center Beam FC		Beam Width
2.0 ft	422.84 fc	8.9 ft	5.6 ft
4.0 ft	105.71 fc	18.1 ft	11.3 ft
6.0 ft	52.85 fc	27.0 ft	16.9 ft
8.0 ft	26.42 fc	36.1 ft	22.5 ft
10.0 ft	13.21 fc	45.1 ft	28.2 ft
12.0 ft	10.57 fc	54.1 ft	33.8 ft

■ Vert. Spread: 200° ■ Horiz. Spread: 120°

Polar Candela Distribution

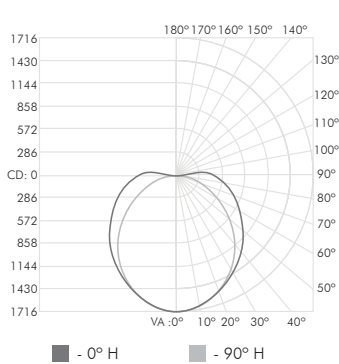

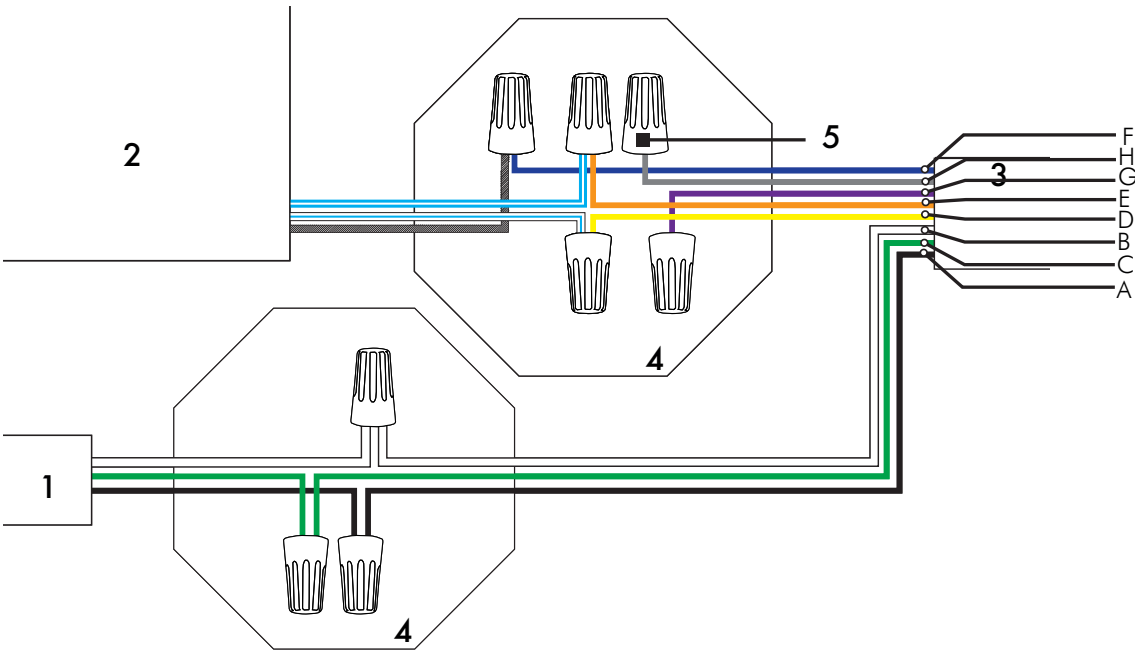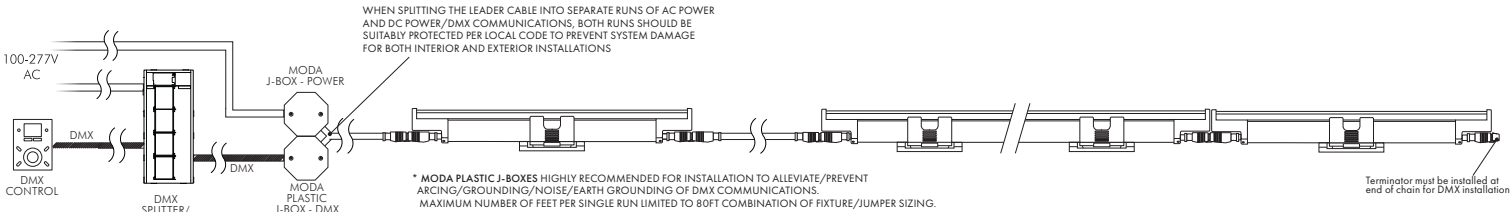

















Wiring Legend

- 1 Power 100-277V AC
- 2 DMX Splitter/Repeater
- 3 8 Pin Leader Cable
- 4 Junction Box
- 5 Wiring Nuts

Shielded RS-485

- DMX Positive
- DMX Negative
- DMX Shield



8 Pin Leader Cable

		UL/cUL	CE/CCC*
A	100-277V AC	 Black	 Brown
B	Neutral	 White	 Blue
C	Ground	 Green	 Green/Yellow
D	Data Positive/DC +	 Orange	 Orange
E	Data Negative/DC -	 Yellow	 Yellow
F	DMX Shield	 Blue	 Blue
G	Not Used	 Purple	 Purple
H	Not Used	 Gray	 Gray



*Not illustrated

DMX Connectors


Male



Female




Angle Adjustment




DMX LEADER CABLES

Moda Cove Exterior 8 Pin Leader Cables

	UL/cUL	EU/CCC
Lengths	10ft and 25ft	3m and 10m
Color	Gray	Gray

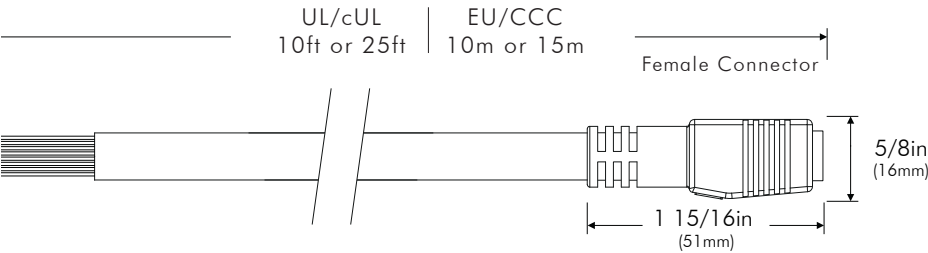


Connectors

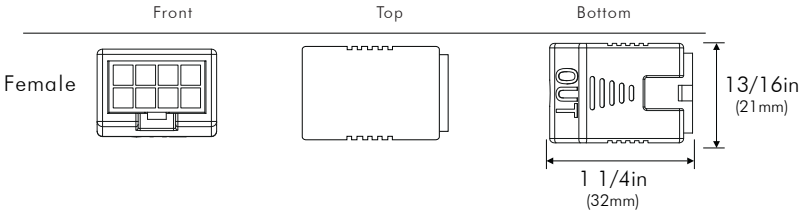



DMX JUMPER CABLES

Moda Cove Exterior 8 Pin Jumper Cables


	UL/cUL	EU/CCC
Lengths	1ft and 4ft	300mm and 1m
Color	Gray	Gray

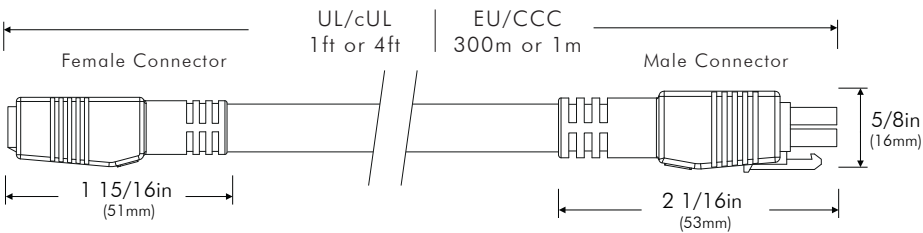


Connectors

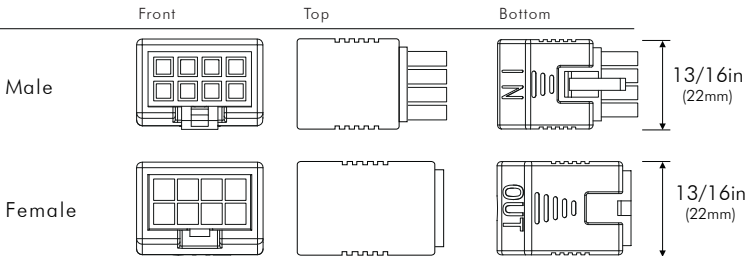

	UL/cUL	EU/CCC
1 Live 100-277V	Black	Brown
2 Neutral	White	Blue
3 Ground	Green	Green/Yellow
4 DMX Positive	Orange	Orange
5 DMX Negative	Yellow	Yellow
6 DMX Shield	Blue	Blue



	UL/cUL	EU/CCC
1 Live 100-277V	Black	Brown
2 Neutral	White	Blue
3 Ground	Green	Green/Yellow
4 DMX Positive	Orange	Orange
5 DMX Negative	Yellow	Yellow
6 DMX Shield	Blue	Blue



	UL/cUL	EU/CCC
1 Live 100-277V	Black	Brown
2 Neutral	White	Blue
3 Ground	Green	Green/Yellow
4 DMX Positive	Orange	Orange
5 DMX Negative	Yellow	Yellow
6 DMX Shield	Blue	Blue

FIXTURE		ORDERING SKU
1 FT	Moda Cove Interior Standard Output Silver DMX512 Dynamic Warm White 1800K-3000K HCRI 1FT	MCI-SO-S1-S-DWW-1
	Moda Cove Interior High Output Silver DMX512 Dynamic Warm White 2200K-3000K HCRI 1FT	MCI-HO-S1-S-DWW-1
	Moda Cove Interior High Output Plus Silver DMX512 Dynamic Warm White 1800K-3000K HCRI 1FT	MCI-HOP-S1-S-DWW-1
4 FT	Moda Cove Interior Standard Output Silver DMX512 Dynamic Warm White 1800K-3000K HCRI 4FT	MCI-SO-S1-S-DWW-4
	Moda Cove Interior High Output Silver DMX512 Dynamic Warm White 2200K-3000K HCRI 4FT	MCI-HO-S1-S-DWW-4
	Moda Cove Interior High Output Plus Silver DMX512 Dynamic Warm White 1800K-3000K HCRI 4FT	MCI-HOP-S1-S-DWW-4

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 8 Pin 10FT	Power to first fixture of run	MLCI-US-8PIN-G-10FT
Leader Cable US 8 Pin 25FT	Power to first fixture of run	MLCI-US-8PIN-G-25FT
Jumper Cable US 8 Pin 1FT	Connection between fixtures	MJCI-US-8PIN-G-1FT
Jumper Cable US 8 Pin 4FT	Connection between fixtures	MJCI-US-8PIN-G-4FT
Leader Cable EU 8 Pin 3M	Power to first fixture of run	MLCI-EU-8PIN-G-3M
Leader Cable EU 8 Pin 10M	Power to first fixture of run	MLCI-EU-8PIN-G-10M
Jumper Cable EU 8 Pin 300MM	Connection between fixtures	MJCI-EU-8PIN-G-300MM
Jumper Cable EU 8 Pin 1M	Connection between fixtures	MJCI-EU-8PIN-G-1M
Terminator 8 Pin	Must be fixed to last fixture for safety	MTI-8PIN-G
Interior Bracket Lock	Holds fixture in place for vertical installation	MCGI-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
Kandi Touch	DMX512 Wall Mounted Touch Panel Controller with Color Display	KND-TCH-B (Black)	250-0040
		KND-TCH-W (White)	250-0041
MODA Touch*	DMX512 Wall Mounted Touch Panel Controller	MTCH-S1-B (Black) MTCH-S1-W (White)	MTCH-S1-B MTCH-S1-W

* - MODA Touch default scene addressing can be found on MODA Touch Product Documentation and DMX Fixture Installation Guides.

CONTROL ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Pathway DMX Splitter/Repeater	Wall-mount, 4 ports, E1.20 RDM Compliant, Small - 10in X 13in X 4 1/2in	PWREP WM P4 TERM RDM SML DMX-RDM	250-0153
Pathway DMX Splitter/Repeater	Wall-mount, 8 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P8 TERM RDM MED DMX-RDM	250-0154
Pathway DMX Splitter/Repeater	Wall-mount, 12 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P12 TERM RDM MED DMX-RDM	250-0155
Shielded Cable 500FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-500FT	250-0251
Shielded Cable 1000FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-1000FT	250-0252