


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

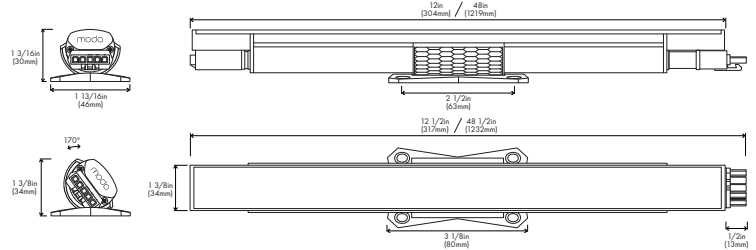

## PHYSICAL

|                       |  |                     |
|-----------------------|--|---------------------|
| Dimensions            | L: 12in (304mm)  | W: 1 13/16in (46mm) |
|                       | L: 48in (1219mm)   | H: 1 3/16in (30mm)  |
| Weight                | 1ft: 0.38 lbs (0.17kg)   |                     |
|                       | 4ft: 1.22 lbs (0.55 kg)  |                     |
| Applications          | Cove, Accent, & Indirect General Illumination  |                     |
| Construction          | 6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens |                     |
| Ingress Protection    | Dry/Damp Location IP52   |                     |
| Thermal Management    | Moda Aluminum Heat Sink  |                     |
| Fixture Connections   | Integral Male & Female Connectors  |                     |
| Operating Temperature | -4°F ~ 122°F (-20°C ~ 50°C)  |                     |
| Storage Temperature   | -13°F ~ 158°F (-25°C ~ 70°C)   |                     |
| Humidity              | 20-70% Non Condensing  |                     |

## SPECIFICATIONS

|     | Lumens | Efficacy |
|-----|--------|----------|
| 1FT | 238.64 | 40.44    |
| 4FT | 954.56 | 43.38    |

## POWER CONSUMPTION

|     | 120V AC | 240V AC | 277V AC |
|-----|---------|---------|---------|
| 1FT | 5.9W    | 6.3W    | 6.5W    |
| 4FT | 22W     | 22.1W   | 22.2W   |

## OUTPUT

|                     |                                |
|---------------------|--------------------------------|
| Colors              | RGBA                           |
| Beam Angle          | 200°                           |
| Color Bin Tolerance | Zero Bin                       |
| Lumen Maintenance   | 90,000 Hours L70 @ 25°C        |
|                     | 70,000 Hours L70 @ 50°C        |
| Testing Data        | Light Data LM-79-08 & LM-80-08 |

## ELECTRICAL

|               |                       |
|---------------|-----------------------|
| Input Voltage | 100-277V AC 50Hz/60Hz |
| Control       | DMX512                |
| Power Factor  | ≥ 0.98                |

## MAX CONTINUOUS RUN

| 120V AC | 240V AC | 277V AC |
|---------|---------|---------|
| 120 ft  | 240 ft  | 240 ft  |

## STANDARDS & CERTIFICATIONS



|               |   |
|---------------|---|
| Certification | Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant. |
|               |   |
| Class         | 1   |
| Warranty      | 5 Year Limited Warranty   |

|     | FIXTURE  | PART NUMBER            | ORDERING SKU |
|-----|--|------------------------|--------------|
| 1FT | Moda Mini Cove Interior Standard Output Silver DMX512 RGBA 1FT | MMCI-S-S-DMX512-RGBA-1 | 105-1603     |
| 4FT | Moda Mini Cove Interior Standard Output Silver DMX512 RGBA 4FT | MMCI-S-S-DMX512-RGBA-4 | 105-3603     |

| ACCESSORIES                 | DESCRIPTION   | PART NUMBER          | ORDERING SKU |
|-----------------------------|---|----------------------|--------------|
| Leader Cable US 5 Pin 10FT  | Power to first fixture of run   | MLCI-US-5PIN-W-10FT  | 299-0100     |
| Leader Cable US 5 Pin 25FT  | Power to first fixture of run   | MLCI-US-5PIN-W-25FT  | 299-0102     |
| Jumper Cable US 5 Pin 1FT   | Connection between fixtures   | MJCI-US-5PIN-W-1FT   | 299-1100     |
| Jumper Cable US 5 Pin 4FT   | Connection between fixtures   | MJCI-US-5PIN-W-4FT   | 299-1102     |
| Leader Cable EU 5 Pin 3M    | Power to first fixture of run   | MLCI-EU-5PIN-W-3M    | 299-0101     |
| Leader Cable EU 5 Pin 10M   | Power to first fixture of run   | MLCI-EU-5PIN-W-10M   | 299-0103     |
| Jumper Cable EU 5 Pin 300MM | Connection between fixtures   | MJCI-EU-5PIN-W-300MM | 299-1101     |
| Jumper Cable EU 5 Pin 1M    | Connection between fixtures   | MJCI-EU-5PIN-W-1M    | 299-1103     |
| Terminator 5 Pin            | Must be fixed to last fixture for safety  | MTI-5PIN-W           | 299-2100     |
| Mounting Track 20FT         | Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft. | MMC-20-TRACK-1-S1-G  | 299-3200     |
| Mounting Track Connector    | Interior track connector  | N/A                  | 299-3202     |
| Symmetric Louver 1FT        | Symmetric louver for light control  | N/A                  | 299-4320     |
| Asymmetric Louver 1FT       | Asymmetric louver for light control   | N/A                  | 299-4231     |
| Honeycomb Louver 1FT        | Honeycomb louver for light control  | N/A                  | 299-4232     |
| Blade Louver 1FT            | Blade louver for light control  | N/A                  | 299-4233     |

| CONTROLS    | DESCRIPTION   | PART NUMBER                            | ORDERING SKU           |
|-------------|---|--|------------------------|
| Kandi Touch | DMX512 Wall Mounted Touch Panel Controller with Color Display | KND-TCH-B (Black)<br>KND-TCH-W (White) | 250-0040<br>250-0041   |
| MODA Touch* | DMX512 Wall Mounted Touch Panel Controller                    | MTCH-S1-B (Black)<br>MTCH-S1-W (White) | MTCH-S1-B<br>MTCH-S1-W |

\* - MODA Touch default scene addressing can be found on MODA Touch Product Documentation and DMX Fixture Installation Guides.

| CONTROL ACCESSORIES           | DESCRIPTION  | PART NUMBER                       | ORDERING SKU |
|-------------------------------|--|-----------------------------------|--------------|
| Pathway DMX Splitter/Repeater | Wall-mount, 4 ports, E1.20 RDM Compliant, Small - 10in X 13in X 4 1/2in      | PWREP WM P4 TERM RDM SML DMX-RDM  | 250-0153     |
| Pathway DMX Splitter/Repeater | Wall-mount, 8 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in     | PWREP WM P8 TERM RDM MED DMX-RDM  | 250-0154     |
| Pathway DMX Splitter/Repeater | Wall-mount, 12 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in    | PWREP WM P12 TERM RDM MED DMX-RDM | 250-0155     |
| Shielded Cable 500FT          | RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation | SW-L-19827-1-500FT                | 250-0251     |
| Shielded Cable 1000FT         | RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation | SW-L-19827-1-1000FT               | 250-0252     |