


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

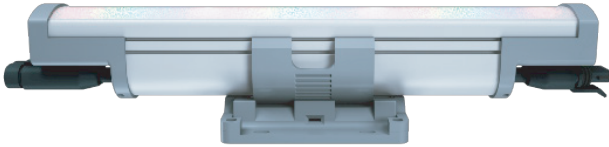

## PHYSICAL

<b>Dimensions</b>	L: 12 1/2in (318mm)	W: 2 13/16in (71mm)
	L: 47 3/8in (1204mm)	H: 2 9/16in (65mm)
<b>Weight</b>	12in: 1.3lbs (0.6kg)	
	48in: 4.9lbs (2.22kg)	
<b>Applications</b>	Cove, Accent, & Indirect General Illumination	
<b>Construction</b>	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
<b>Ingress Protection</b>	Wet Location IP66	
<b>Thermal Management</b>	Moda Aluminum Heat Sink	
<b>Fixture Connections</b>	Integral Male & Female Connectors	
<b>Operating Temperature</b>	-40°F ~ 122°F (-40°C ~ 50°C)	
<b>Storage Temperature</b>	-40°F ~ 176°F (-40°C ~ 80°C)	
<b>Humidity</b>	0-95% Non Condensing	

## SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
2700K	867	3468	86.70	86.70
3000K	897	3588	89.70	89.70
3500K	909	3636	90.90	90.90
4000K	921	3684	92.10	92.10

## POWER CONSUMPTION

	120V - 277V AC	
	1FT	4FT
HO	10W	40W

## OUTPUT

<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>Beam Angle</b>	120°
<b>CRI</b>	97 (2700K, 3000K, 3500K, 4000K)
<b>SDCM</b>	2-Step MacAdam Ellipse
<b>Color Bin Tolerance</b>	Single Bin
<b>Lumen Maintenance</b>	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	DMX512
<b>Power Factor</b>	≥ 0.98

## MAX CONTINUOUS RUN

	120V AC	277V AC
HO	80ft	80ft

## STANDARDS & CERTIFICATIONS



<b>Certification</b>	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
<b>Class</b>	1
<b>Warranty</b>	3 Year Limited Warranty

FIXTURE	ORDERING SKU
1 FT	Moda Cove Exterior High Output Silver DMX512 RGB 2700K HCRI 1FT
	Moda Cove Exterior High Output Silver DMX512 RGB 3000K HCRI 1FT
	Moda Cove Exterior High Output Silver DMX512 RGB 3500K HCRI 1FT
	Moda Cove Exterior High Output Silver DMX512 RGB 4000K HCRI 1FT
4 FT	Moda Cove Exterior High Output Silver DMX512 RGB 2700K HCRI 4FT
	Moda Cove Exterior High Output Silver DMX512 RGB 3000K HCRI 4FT
	Moda Cove Exterior High Output Silver DMX512 RGB 3500K HCRI 4FT
	Moda Cove Exterior High Output Silver DMX512 RGB 4000K HCRI 4FT

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 8 Pin 10FT	Power to first fixture of run	MLCE-US-8PIN-B-10FT
Leader Cable US 8 Pin 25FT	Power to first fixture of run	MLCE-US-8PIN-B-25FT
Jumper Cable US 8 Pin 1FT	Connection between fixtures	MJCE-US-8PIN-B-1FT
Jumper Cable US 8 Pin 4FT	Connection between fixtures	MJCE-US-8PIN-B-4FT
Leader Cable EU 8 Pin 3M	Power to first fixture of run	MLCE-EU-8PIN-B-3M
Leader Cable EU 8 Pin 10M	Power to first fixture of run	MLCE-EU-8PIN-B-10M
Jumper Cable EU 8 Pin 300MM	Connection between fixtures	MJCE-EU-8PIN-B-300MM
Jumper Cable EU 8 Pin 1M	Connection between fixtures	MJCE-EU-8PIN-B-1M
Terminator 8 Pin	Must be fixed to last fixture for safety	MTE-8PIN-B
Exterior Bracket Lock	Holds fixture in place for vertical installation	MCE-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
Kandi Touch	DMX512 Wall Mounted Touch Panel Controller with Color Display	KND-TCH-B (Black)	250-0040
		KND-TCH-W (White)	250-0041
MODA Touch*	DMX512 Wall Mounted Touch Panel Controller	MTCH-S1-B (Black)	MTCH-S1-B
		MTCH-S1-W (White)	MTCH-S1-W

\* - MODA Touch default scene addressing can be found on MODA Touch Product Documentation and DMX Fixture Installation Guides.

CONTROL ACCESSORIES	DESCRIPTION	PART NUMBER	ORDERING SKU
Pathway DMX Splitter/Repeater	Wall-mount, 4 ports, E1.20 RDM Compliant, Small - 10in X 13in X 4 1/2in	PWREP WM P4 TERM RDM SML DMX-RDM	250-0153
Pathway DMX Splitter/Repeater	Wall-mount, 8 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P8 TERM RDM MED DMX-RDM	250-0154
Pathway DMX Splitter/Repeater	Wall-mount, 12 ports, E1.20 RDM Compliant, Medium - 10in X 23in X 4 1/2in	PWREP WM P12 TERM RDM MED DMX-RDM	250-0155
Shielded Cable 500FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-500FT	250-0251
Shielded Cable 1000FT	RS-485 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	SW-L-19827-1-1000FT	250-0252