


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO #: _____ Quantity: _____

Notes: _____

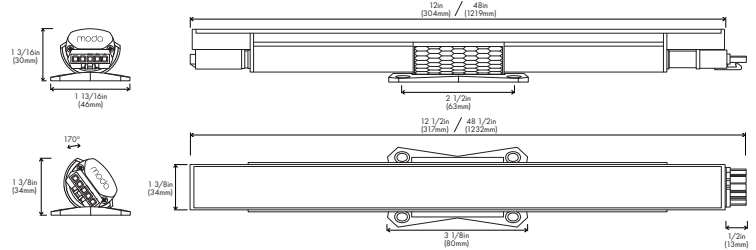

PHYSICAL

| | | |
|-----------------------|--|---------------------|
| Dimensions | L: 12in (304mm) | W: 1 13/16in (46mm) |
| | L: 48in (1219mm) | H: 1 3/16in (30mm) |
| Weight | 1ft: 0.38 lbs (0.17kg) | |
| | 4ft: 1.22 lbs (0.55 kg) | |
| Applications | Cove, Accent, & Indirect General Illumination | |
| Construction | 6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens | |
| Ingress Protection | Dry/Damp Location IP52 | |
| Thermal Management | Moda Aluminum Heat Sink | |
| Fixture Connections | Integral Male & Female Connectors | |
| Operating Temperature | -4°F ~ 122°F (-20°C ~ 50°C) | |
| Storage Temperature | -13°F ~ 158°F (-25°C ~ 70°C) | |
| Humidity | 20-70% Non Condensing | |

SPECIFICATIONS

| | Lumens | Efficacy |
|-----|-------------|----------------|
| 1FT | 448 - 489 | 74.66 - 94.03 |
| 4FT | 1779 - 1891 | 92.17 - 103.33 |

POWER CONSUMPTION

| | 120V AC | 240V AC | 277V AC |
|------|---------|---------|---------|
| 1 FT | 5.2W | 5.7W | 6W |
| 4 FT | 18.3W | 19W | 19.3W |

MAX CONTINUOUS RUN*

| | 120V AC | 240V AC | 277V AC |
|----|---------|---------|---------|
| SO | 120ft | 240ft | 240ft |

*Each connection uses 1mA power. Please check chosen dimmer for any mA restrictions (i.e., 50mA restriction = 50 maximum connections).

OUTPUT

| | |
|---------------------|--------------------------------|
| CCTs | 2700K to 1800K |
| | 3000K to 2200K |
| | 3500K to 2200K |
| Beam Angle | 200° |
| CRI | 98 |
| SDCM | 2-Step MacAdam Ellipse |
| Color Bin Tolerance | Zero Bin |
| Lumen Maintenance | 90,000 Hours L70 @ 25°C |
| | 70,000 Hours L70 @ 50°C |
| Testing Data | Light Data LM-79-08 & LM-80-08 |

ELECTRICAL

| | |
|---------------|-----------------------|
| Input Voltage | 100-277V AC 50Hz/60Hz |
| Control | 0-10V |
| Power Factor | ≥ 0.98 |

STANDARDS & CERTIFICATIONS



| | |
|---------------|--|
| Certification | Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant. Title 24, JA8-2019 |
| Class | 1 |
| Warranty | 5 Year Limited Warranty |

| | FIXTURES | PART NUMBER | ORDERING SKU |
|--------------|--|---------------------|--------------|
| 0-10V 1FT | Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 1FT | MMGI-S-S-0-GD2718-1 | 137-1002 |
| | Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 3000K-2200K HCRI 1FT | MMGI-S-S-0-GD3022-1 | 137-1023 |
| | Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 1FT | MMGI-S-S-0-GD3522-1 | 137-1025 |
| 0-10V 4FT | Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 4FT | MMGI-S-S-0-GD2718-4 | 137-3002 |
| | Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 3000K-2200K HCRI 4FT | MMGI-S-S-0-GD3022-4 | 137-3023 |
| | Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 4FT | MMGI-S-S-0-GD3522-4 | 137-3025 |

| ACCESSORIES | DESCRIPTION | PART NUMBER | ORDERING SKU |
|-----------------------------|--|----------------------|--------------|
| Leader Cable US 5 Pin 10FT | Power to first fixture of run | MLCI-US-5PIN-W-10FT | 299-0100 |
| Leader Cable US 5 Pin 25FT | Power to first fixture of run | MLCI-US-5PIN-W-25FT | 299-0102 |
| Jumper Cable US 5 Pin 1FT | Connection between fixtures | MJCI-US-5PIN-W-1FT | 299-1100 |
| Jumper Cable US 5 Pin 4FT | Connection between fixtures | MJCI-US-5PIN-W-4FT | 299-1102 |
| Leader Cable EU 5 Pin 3M | Power to first fixture of run | MLCI-EU-5PIN-W-3M | 299-0101 |
| Leader Cable EU 5 Pin 10M | Power to first fixture of run | MLCI-EU-5PIN-W-10M | 299-0103 |
| Jumper Cable EU 5 Pin 300MM | Connection between fixtures | MJCI-EU-5PIN-W-300MM | 299-1101 |
| Jumper Cable EU 5 Pin 1M | Connection between fixtures | MJCI-EU-5PIN-W-1M | 299-1103 |
| Terminator 5 Pin | Must be fixed to last fixture for safety | MTI-5PIN-W | 299-2100 |
| Mounting Track 20FT | Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft. | MMC-20-TRACK-1-S1-G | 299-3200 |
| Mounting Track Connector | Interior track connector | N/A | 299-3202 |
| Symmetric Louver 1FT | Symmetric louver for light control | N/A | 299-4230 |
| Asymmetric Louver 1FT | Asymmetric louver for light control | N/A | 299-4231 |
| Honeycomb Louver 1FT | Honeycomb louver for light control | N/A | 299-4232 |
| Blade Louver 1FT | Blade louver for light control | N/A | 299-4233 |