

Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO #: _____ Quantity: _____

Notes: _____



Miniature Line Voltage GRAZE Color Fixture.

MODA MINI GRAZE COLOR INTERIOR is an award winning, patented, miniature line voltage cove lighting system. Now available in mono static colors, these unique colors can enhance any environment. For projects which require a unique static color the only way to achieve this is by mixing red, green and blue colors with DMX 512 controls, DMX 512 enabled fixtures, DMX wiring and time to program the specific color required. All of this has a cost. This is now eliminated by choosing MODA MINI Graze Color. No longer do you have to worry about the red die degrading faster than green and blue dies, hence having a shift over time with the specific color the designer has chosen. Enjoy worry free simple color specific fixtures. Easy 3 wire connections for on/off or ELV dimming control, or standard 5 wire for 0-10V installations. This drastically reduces installation time and cost. Choose from Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet or Turquoise. If a project requires a custom color we are able to create that color in our laboratory with our own ability to mix proprietary MODA Phosphor to create virtually any color required.

Unlike other fixtures which are much larger in physical size, MINI GRAZE utilizes the latest Advanced MODA Design and Electronic Engineering, ensuring fixtures are cool to the touch. This is achieved by designing a forward thinking fixture with intelligent driver technology and by under driving the most advanced LEDs in the World. Thus creating a fixture which is so cool it can be held after days of illumination. The L70 (longevity) of the fixture is extended and phosphor degradation is kept to a minimum.

The Onboard American Dimming Chipset, programmed by our MODA Software Division with new Advanced Firmware ensures MINI GRAZE delivers smooth, no noise, flicker free and synchronized dimming down to 0% with ELV or 0-10V Dimmers. Choose from either ELV or 0-10V direct dimming fixtures. Unlike other fixtures in the marketplace there is no need to purchase additional adapters, converters, dimming boxes or control modules, just use conventional wiring direct from the dimmer to create a powerful lighting system, saving time and money. Link any combination of 6", 1ft, 4ft and 8ft fixtures and every fixture will dim together smoothly, synchronized from 100% to 0%. With no minimum run lengths, just one 6" fixture will dim seamlessly to 0%.

With MINI GRAZE the installer is able to achieve long single runs of up to 240 feet decreasing the number of wiring circuits required in an installation. Another step forward in this category of small sized fixtures is the Universal power input. We designed a small MODA Micro Driver specific for MINI GRAZE enabling it to accept 100-277V AC 50/60 Hz, thus decreasing the number of SKU's needed to be held by any of our Worldwide distributors and giving the installer a choice of power inputs from one fixture.

A specialized curved polymer optical lens combined with a cleverly designed Light Chamber delivers a light bending, smooth 200 degree beam pattern perfect for cove installations with no color over angle, no striations, inter locking fields of light and no dark spots.

The fixture incorporates an integral, patented, tool less self-locking bracket which slides into any position and turns 170 degrees. Built-in male & female connectors with thumb latch connections for fast installation time. Lightweight aluminum construction for durability and excellent thermal characteristics. Quality American Made electronic components. Available in a tiny 6 inch size (15cm) for tight turning coves and to finish a small space on the end of a run. Perfect for bending curves - link up to 320 fixtures in a single run. 1ft, 4ft and 8ft lengths are for fast installation saving expensive labor installation costs and achieving long runs of quality illumination in rapid time.

Tested by Intertek to UL1598 for use in USA & Canada. CE Approved. WEE. RoHS Compliant. TM-30-15 Tested. US Patent No. D787,112 and D783,890.

Product Innovation Award (PIA) Winner 2016 for Best Luminaire. LFI Innovation Award 2017 Finalist for Dynamic Color, Theatrical, Cove, Strips and Tape. Lux Award Commended for Interior Product of the Year 2016. Darc Awards Finalist for Best Architectural Lighting Product - Interior Luminaires 2016. International Design Excellence Award for Innovative Product Design Finalist 2016.

Designed & Developed by MODA LIGHT in Las Vegas, USA.

PAGE

3	FEATURES
4	6 INCH
5	6 INCH POLAR CANDELA
6	6 INCH ILLUMINANCE AT DISTANCE
7	1 FOOT
8	1 FOOT SO POLAR CANDELA
9	1 FOOT HO POLAR CANDELA
10	1 FOOT SO ILLUMINANCE AT A DISTANCE
11	1 FOOT HO ILLUMINANCE AT A DISTANCE
12	4 FOOT
13	4 FOOT SO POLAR CANDELA
14	4 FOOT HO POLAR CANDELA
15	4 FOOT SO ILLUMINANCE AT DISTANCE
16	4 FOOT HO ILLUMINANCE AT DISTANCE
17	CHROMATICITY
18	ELV WIRING
19	GRAZING
20	0-10V TO ELV
21	ACCESSORIES: MOUNTING TRACK
22	ACCESSORIES: LOUVRES ASYMMETRIC
23	ACCESSORIES: LOUVRES SYMMETRIC
24	ACCESSORIES: LOUVRES HONEYCOMB
25	ACCESSORIES: CABLES
26	FIXTURES & ACCESSORIES
27	FIXTURES & ACCESSORIES
28	FIXTURES & ACCESSORIES

PHYSICAL

Dimensions	L: 6 1/2in (165.08mm) L: 1ft 1/8in (308mm) L: 4ft 5/32in (1.22m)	W: 1 1/4in (32mm) H: 1 11/32in (34.5mm)
Weights	6in: 0.21 lbs (0.10 kg) / 1ft: 0.38 lbs (0.17kg)/ 4ft: 1.22 lbs (0.55 kg)/	
Applications	Graze, Accent & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	MODA Aluminum Heat Sink	
Beam Angle	30° x 100°	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

OUTPUT

CCT & SDCM	N/A
Colors	Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Turquoise, Dark Blue and Dark Orange available
Color Bin Tolerance	Zero Bin
CRI	N/A
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

DIMMING

Outputs Available	
6 Inch	SO Only
1 Foot	SO, HO
4 Foot	SO, HO

MODA TECHNOLOGY

modaSOFTWARE™

modaHARDWARE™

modaDIM™

modaLED™

modaMICRO DRIVER™

modaPHOSPHOR™

modaZERO BIN™

modaTHERMAL MANAGEMENT™

modaAIRFLOW™

modaCOLOR RENDITION™

modaLOCK™

modaKWIK CONNECT™

modaLINEAR OPTIC™




RoHS ✓




Certification Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.

Class 1

Warranty 5 Year Limited Warranty




1 11/32"
(34.5mm)



1 1/4"
(32mm)



1 1/2"
(38mm)



ELV

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	76	27	20	18
Green	88	32	23	21
Blue	63	23	17	15
Amber	105	38	28	25
Yellow	97	35	25	23
Golden Yellow	229	82	60	55
Ice Blue	193	69	51	46
Cyan	76	27	20	18
Light Green	221	79	58	53
Pink	90	32	24	21
Violet	87	31	23	21
Turquoise	76	27	20	18
Dark Blue	38	14	10	9
Dark Orange	189	68	50	45

SO Power Consumption

120V	2.8W
240V	3.8W
277V	4.2W

SO Max Continuous Run


120V AC	120 ft
240V AC	240 ft
277V AC	240 ft

NOTES


For 0-10V dimming use Moda Bridge 1 accessory.
Please refer to page 10 (0-10V TO ELV)

STANDARD OUTPUT


SO Red

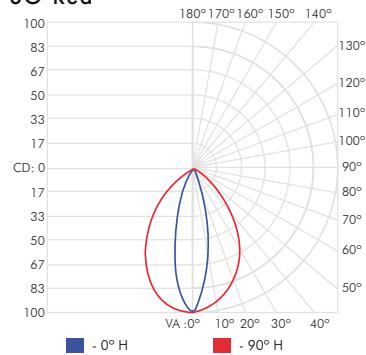


SO Green

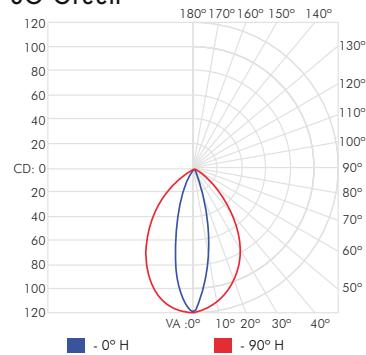


SO Blue

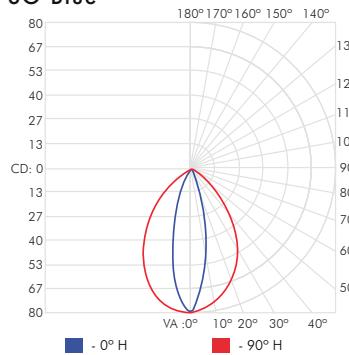


SO Amber

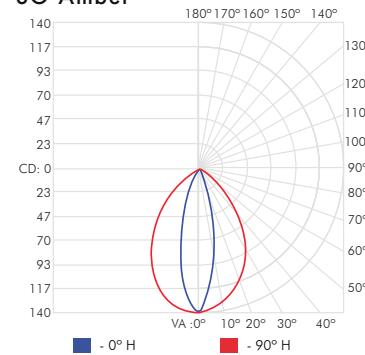


SO Yellow

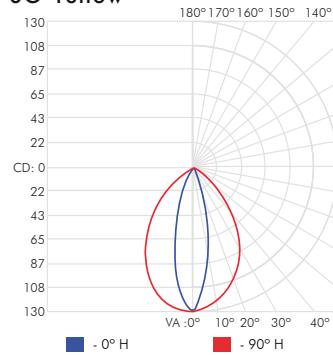


SO Golden Yellow

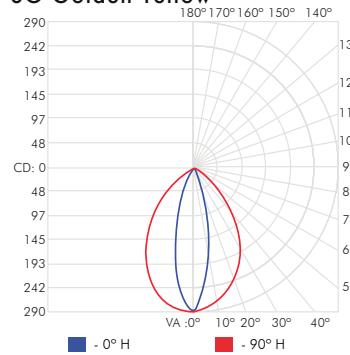


SO Ice Blue

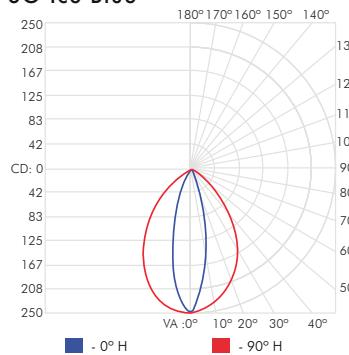


SO Cyan

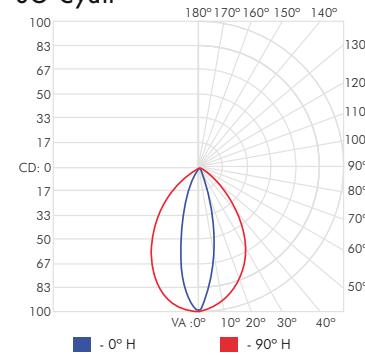


SO Light Green

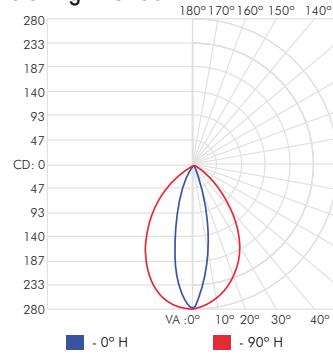


SO Pink

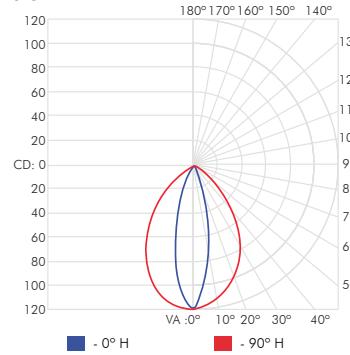


SO Violet

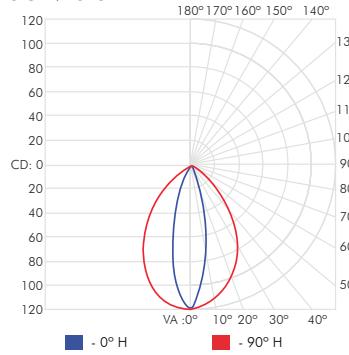


SO Turquoise

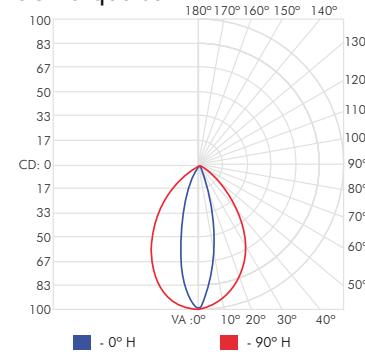

SO Dark Blue

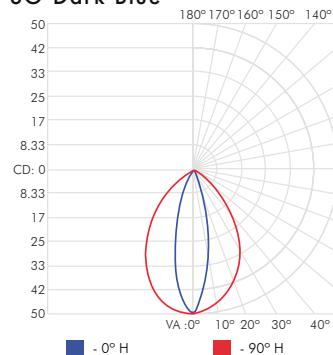


SO Dark Orange

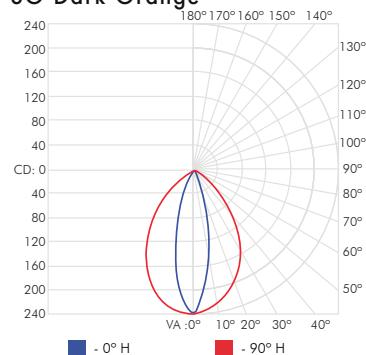


STANDARD OUTPUT


SO Red

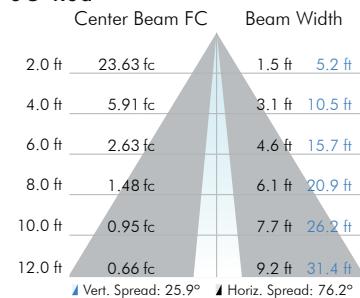


SO Green

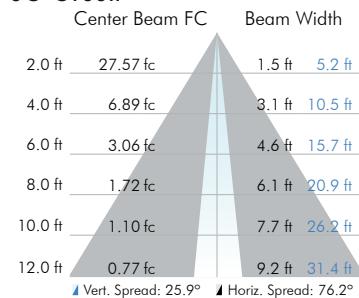


SO Blue

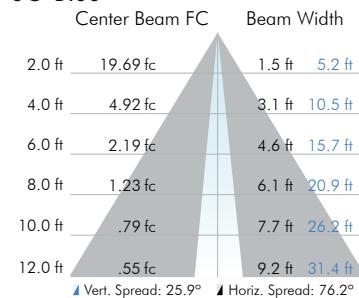


SO Amber

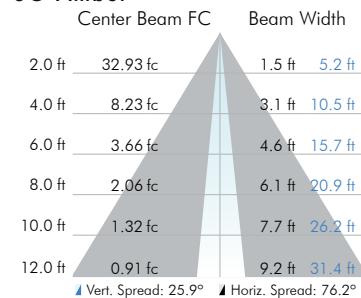


SO Yellow

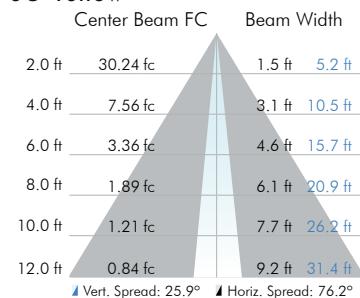


SO Golden Yellow

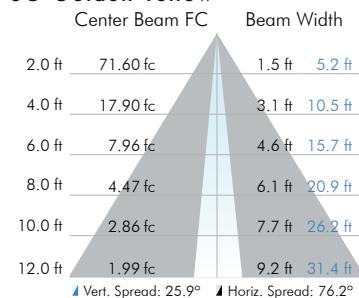


SO Ice Blue

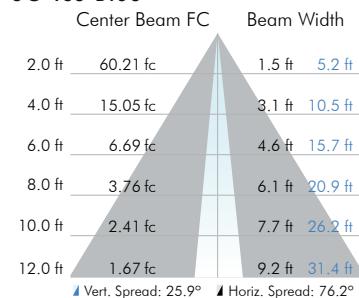


SO Cyan

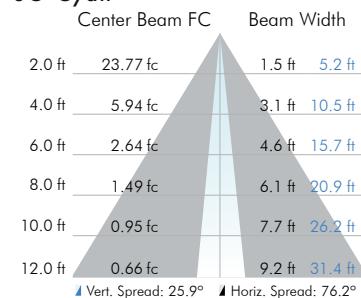


SO Light Green

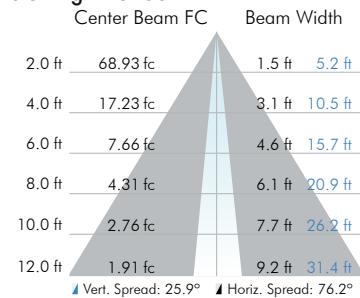


SO Pink

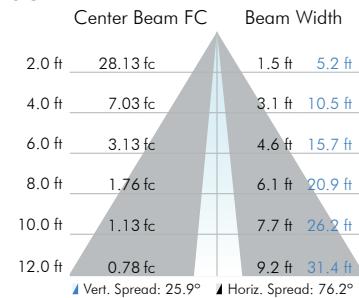


SO Violet

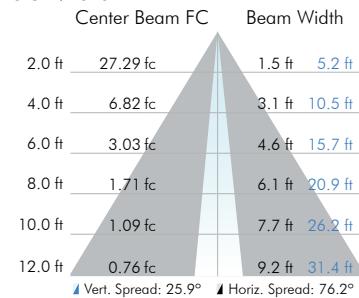


SO Turquoise

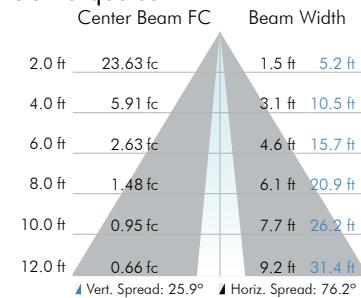


SO Dark Blue

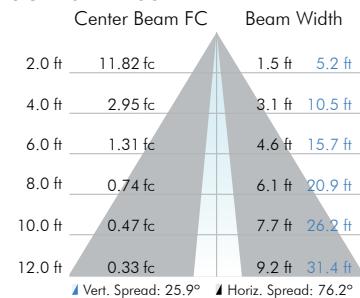

SO Dark Orange

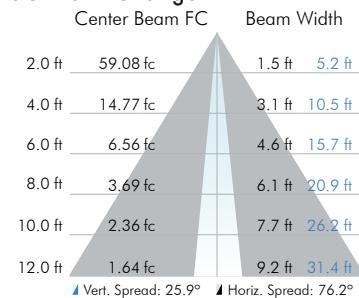

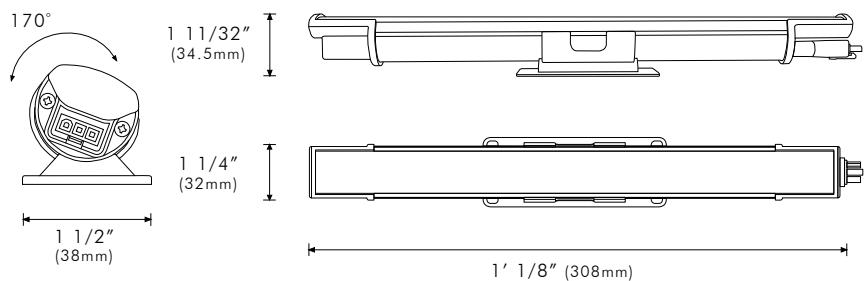

ELV

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	151	30	26	23
Green	176	35	30	27
Blue	126	25	21	19
Amber	211	42	36	32
Yellow	194	39	33	30
Golden Yellow	458	92	78	70
Ice Blue	386	77	65	59
Cyan	152	30	26	23
Light Green	441	88	75	68
Pink	180	36	31	28
Violet	175	35	30	27
Turquoise	151	30	26	23
Dark Blue	76	15	13	12
Dark Orange	378	76	64	58

High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	302	31	30	29
Green	356	37	35	35
Blue	257	27	25	25
Amber	418	43	41	41
Yellow	387	40	38	38
Golden Yellow	914	94	90	89
Ice Blue	772	80	76	75
Cyan	304	31	30	30
Light Green	882	91	87	86
Pink	362	37	36	35
Violet	349	36	35	34
Turquoise	307	32	30	30
Dark Blue	421	43	42	41
Dark Orange	756	78	75	73

SO Power Consumption

120V	5W
240V	5.9W
277V	6.5W

HO Power Consumption

120V	9.7W
240V	10.1W
277V	10.3W

SO Max Continuous Run


120V AC	120 ft
240V AC	240 ft
277V AC	240 ft

HO Max Continuous Run


120V AC	50 ft
240V AC	100 ft
277V AC	100 ft

STANDARD OUTPUT


SO Red

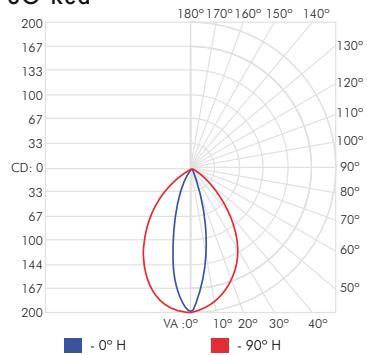


SO Green

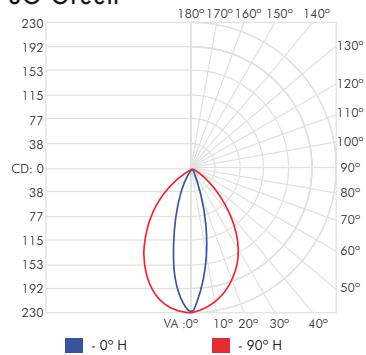


SO Blue

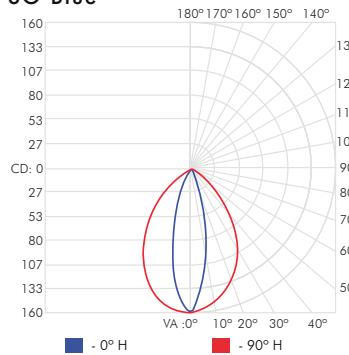


SO Amber

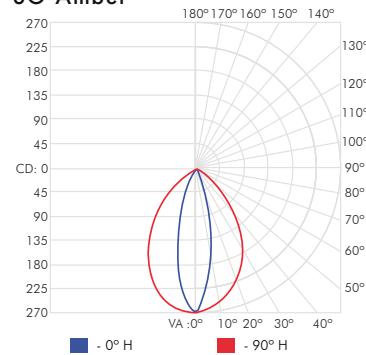


SO Yellow

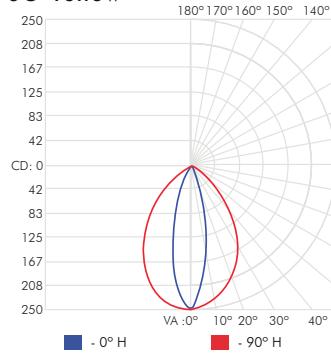


SO Golden Yellow

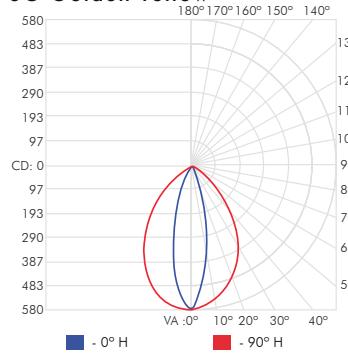


SO Ice Blue

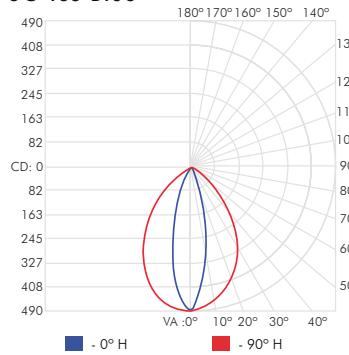


SO Cyan

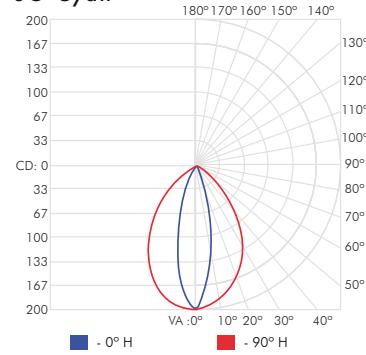


SO Light Green

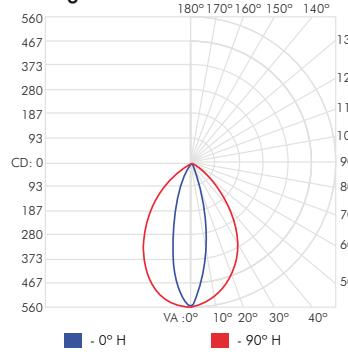


SO Pink

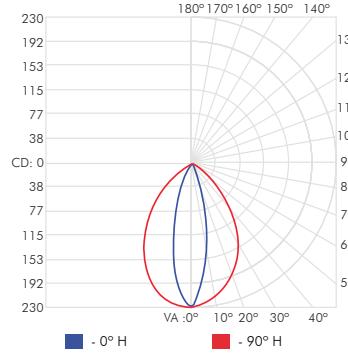


SO Violet

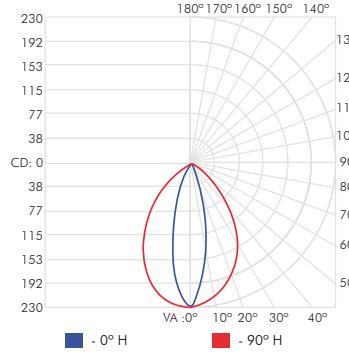


SO Turquoise

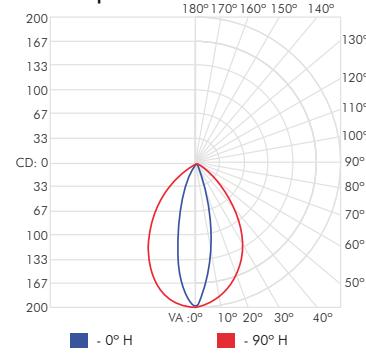

SO Dark Blue

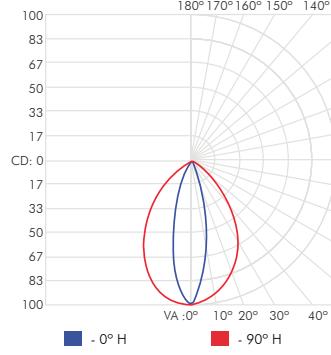


SO Dark Orange

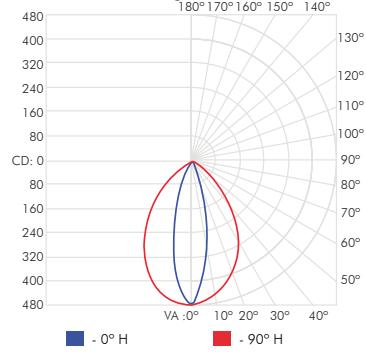


HIGH OUTPUT


HO Red

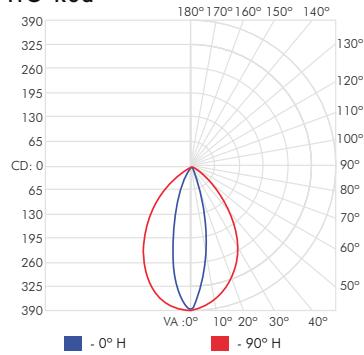


HO Green

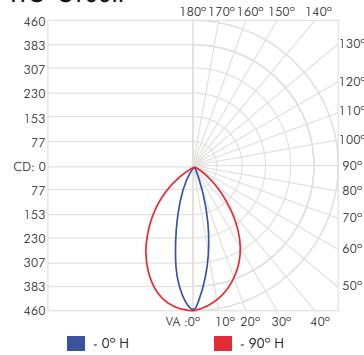


HO Blue

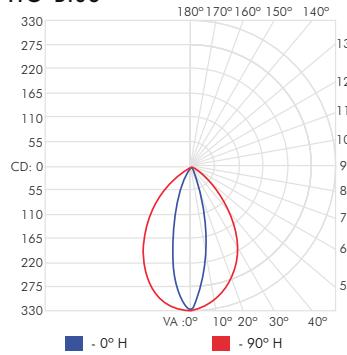


HO Amber

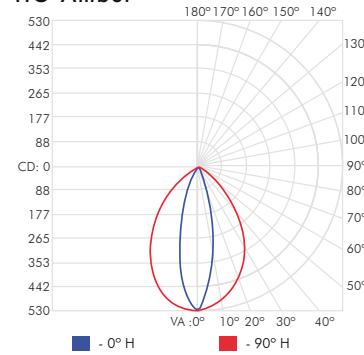


HO Yellow

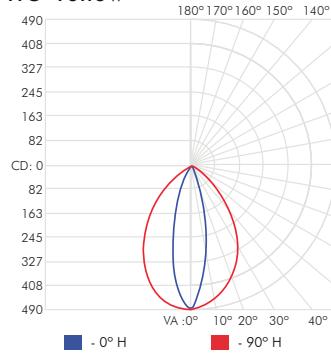


HO Golden Yellow

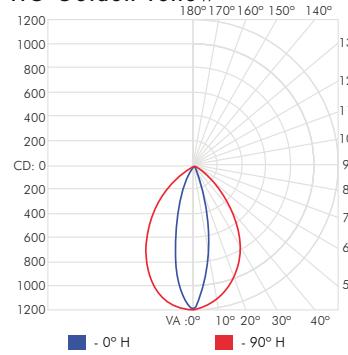


HO Ice Blue

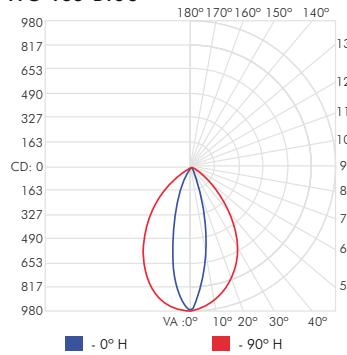


HO Cyan

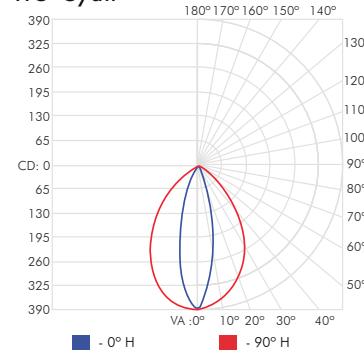


HO Light Green

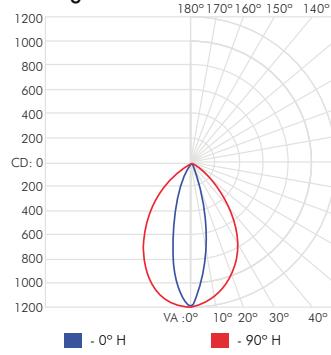


HO Pink

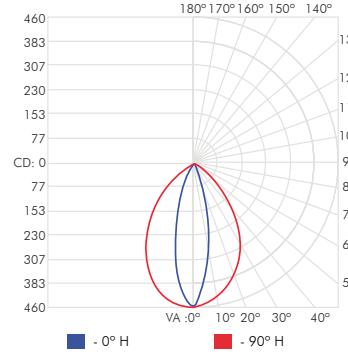


HO Violet

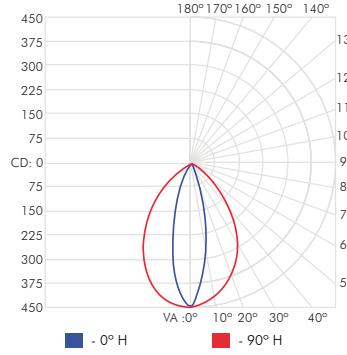


HO Turquoise

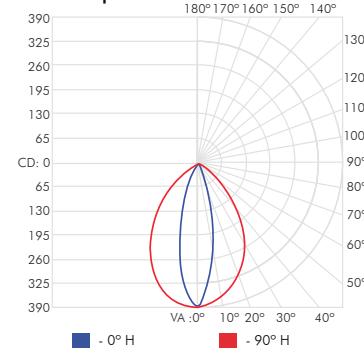

HO Dark Blue

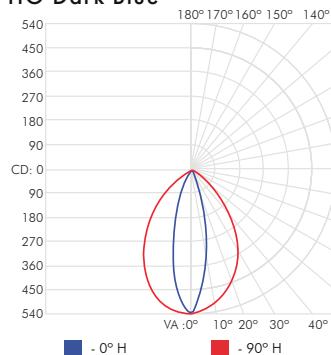


HO Dark Orange

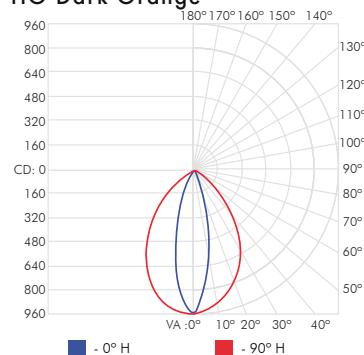


STANDARD OUTPUT


SO Red




SO Green




SO Blue




SO Amber




SO Yellow

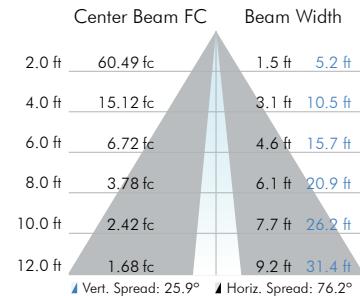


SO Golden Yellow




SO Ice Blue




SO Cyan




SO Light Green

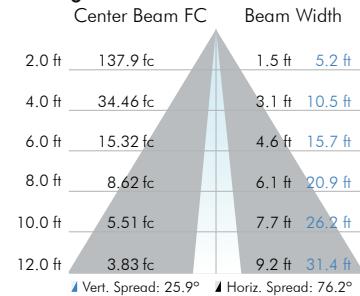


SO Pink




SO Violet




SO Turquoise



SO Dark Blue

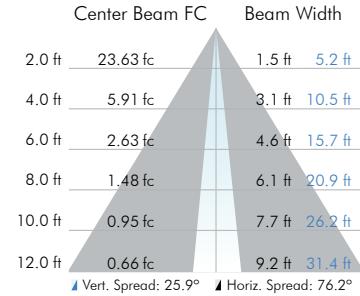


SO Dark Orange




HIGH OUTPUT


HO Red




HO Green




HO Blue




HO Amber




HO Yellow

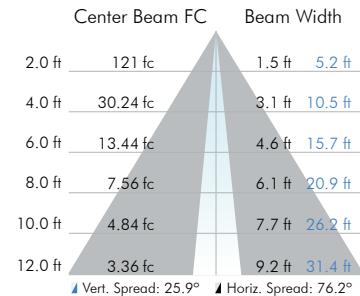


HO Golden Yellow




HO Ice Blue




HO Cyan




HO Light Green

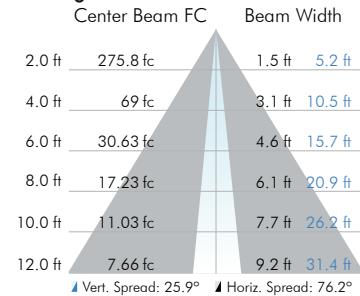


HO Pink




HO Violet




HO Turquoise




HO Dark Blue

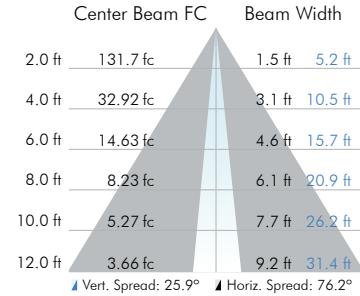

HO Dark Orange



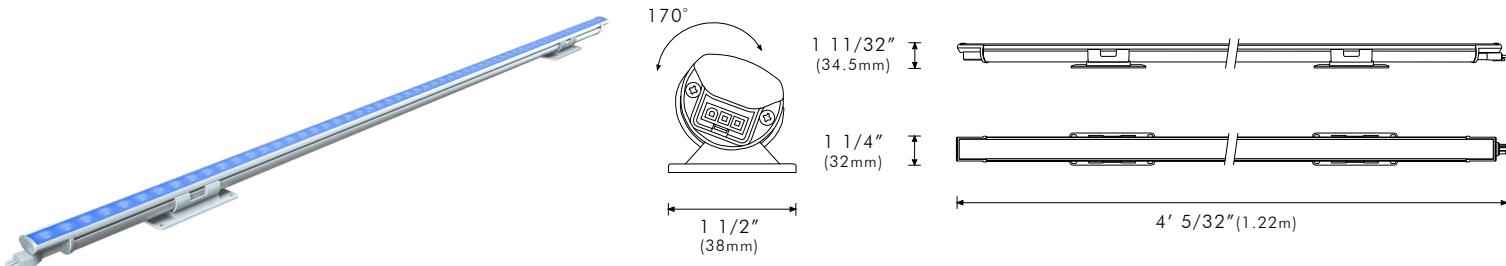

ELV

Standard Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	605	33	32	32
Green	706	39	38	37
Blue	504	28	27	26
Amber	842	46	45	44
Yellow	774	42	41	40
Golden Yellow	1833	100	97	95
Ice Blue	1545	84	82	80
Cyan	608	33	32	32
Light Green	1764	96	94	92
Pink	720	39	38	38
Violet	698	38	37	36
Turquoise	605	33	32	32
Dark Blue	302	17	16	16
Dark Orange	1512	83	80	79

SO Power Consumption

120V	18.3W
240V	18.8W
277V	19.2W

SO Max Continuous Run

120V AC	120 ft
240V AC	240 ft
277V AC	240 ft

High Output	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
Red	1210	34	33	32
Green	1411	39	38	37
Blue	1008	28	27	26
Amber	1685	47	45	44
Yellow	1548	43	42	41
Golden Yellow	3665	102	99	96
Ice Blue	3089	86	83	81
Cyan	1217	34	33	32
Light Green	3528	98	95	92
Pink	1440	40	39	38
Violet	1397	39	38	37
Turquoise	1213	34	33	32
Dark Blue	1685	47	45	44
Dark Orange	3024	84	82	79

HO Power Consumption


120V	36W
240V	37.1W
277V	38.2W

HO Max Continuous Run


120V AC	50 ft
240V AC	100 ft
277V AC	100 ft

STANDARD OUTPUT


SO Red

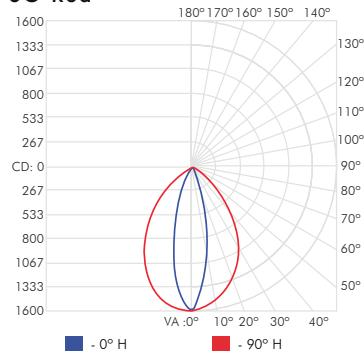


SO Green

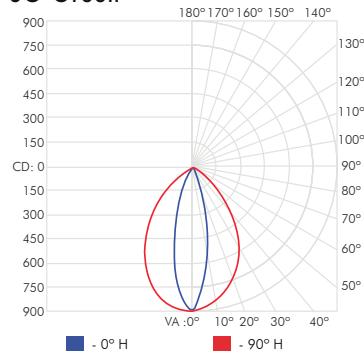


SO Blue

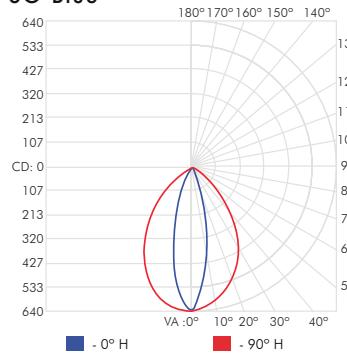


SO Amber

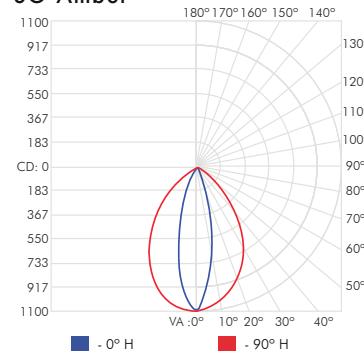


SO Yellow

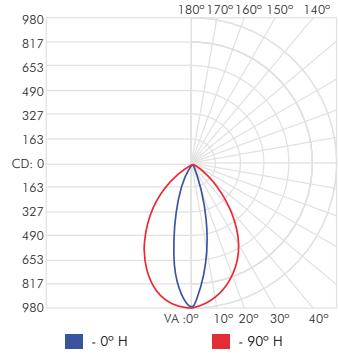


SO Golden Yellow

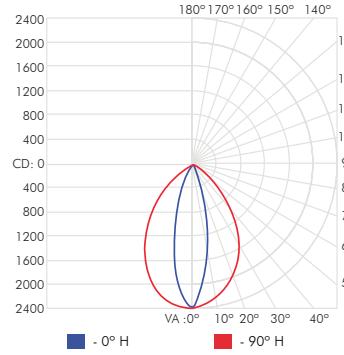


SO Ice Blue

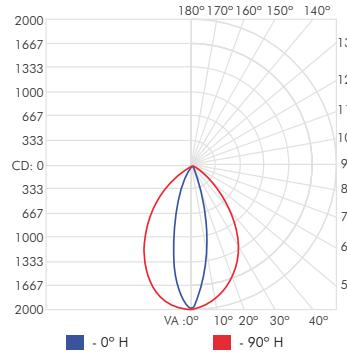


SO Cyan

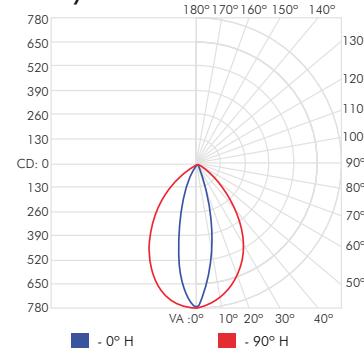


SO Light Green

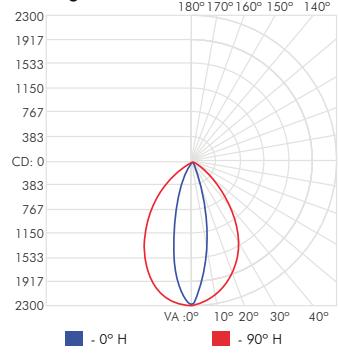


SO Pink

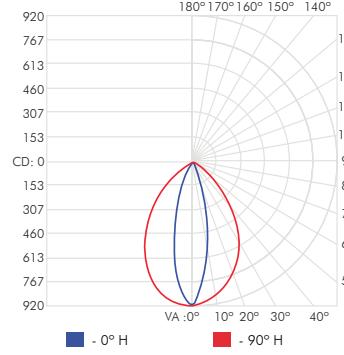


SO Violet

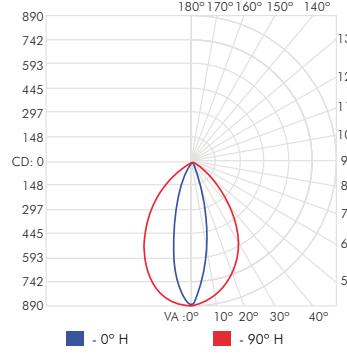


SO Turquoise

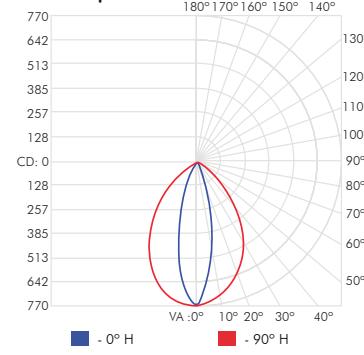

SO Dark Blue

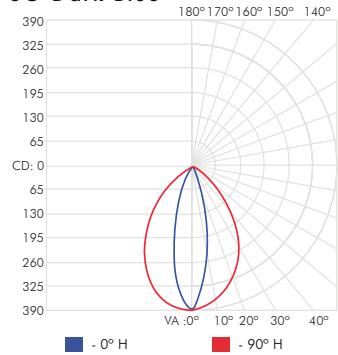


SO Dark Orange

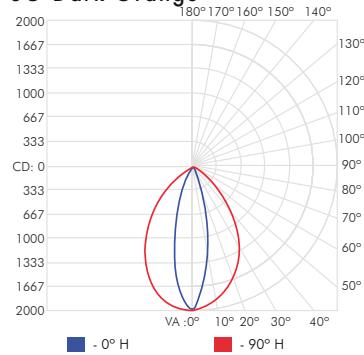


HIGH OUTPUT


HO Red

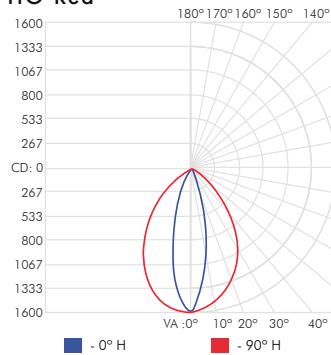


HO Green

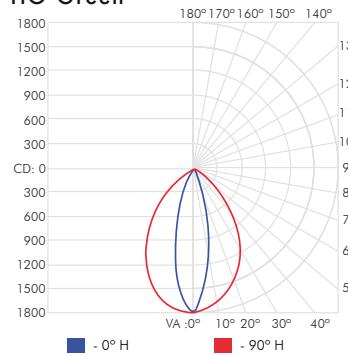


HO Blue

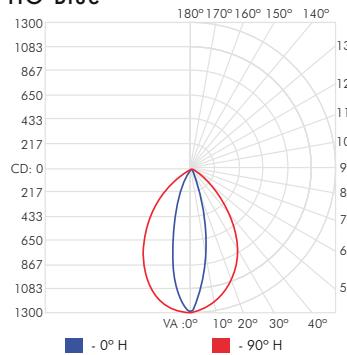


HO Amber

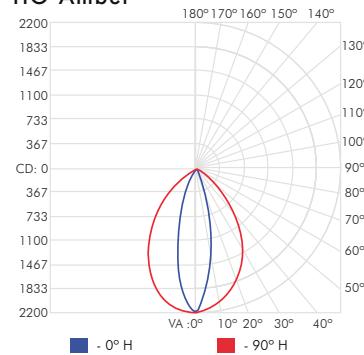


HO Yellow

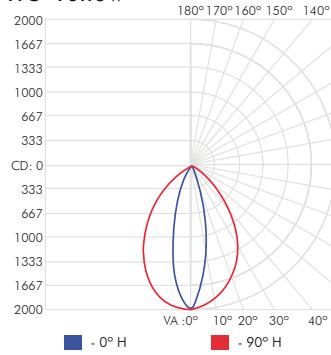


HO Golden Yellow

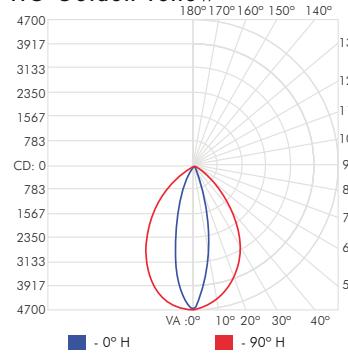


HO Ice Blue

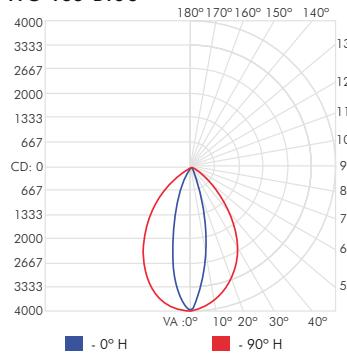


HO Cyan

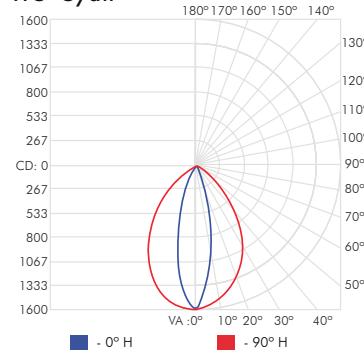


HO Light Green

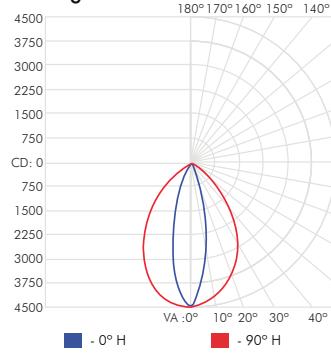


HO Pink

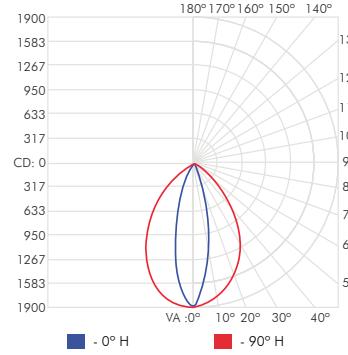


HO Violet

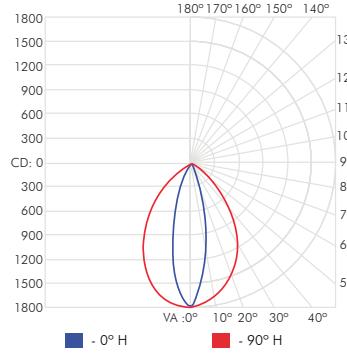


HO Turquoise

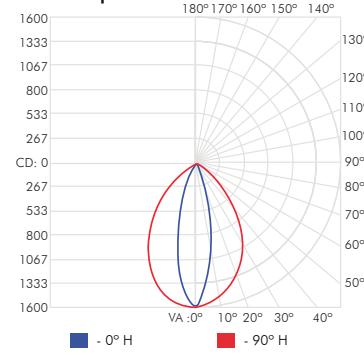

HO Dark Blue

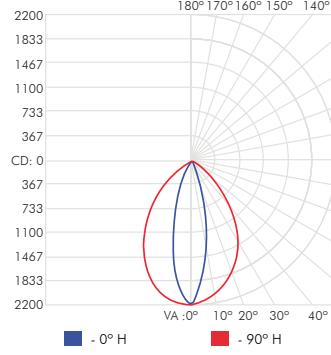

HO Dark Orange

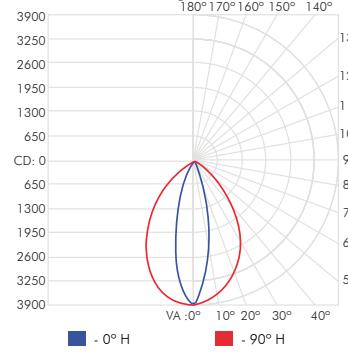


STANDARD OUTPUT




HIGH OUTPUT


HO Red




HO Green

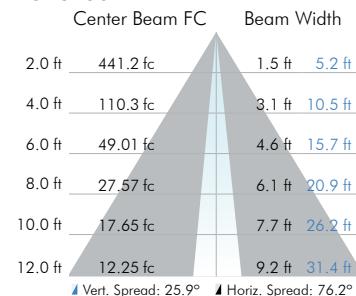


HO Blue

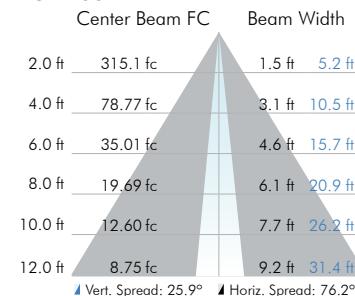


HO Amber

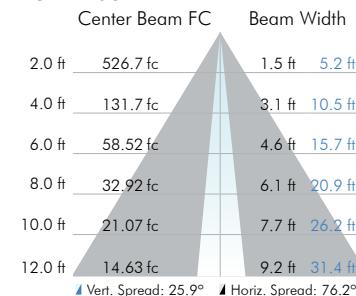


HO Yellow

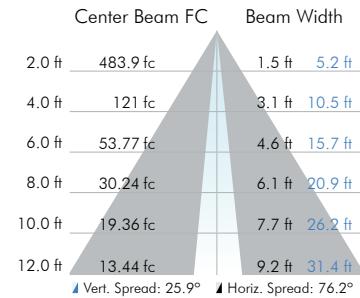


HO Golden Yellow

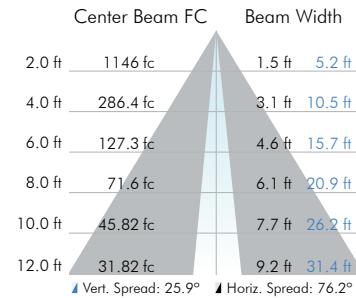


HO Ice Blue

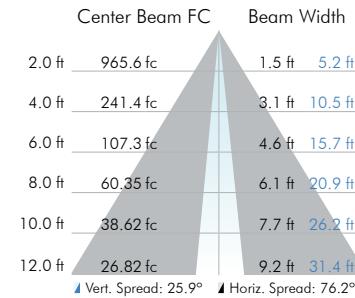


HO Cyan

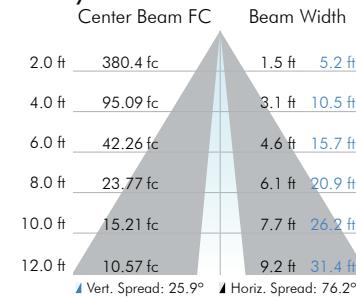


HO Light Green

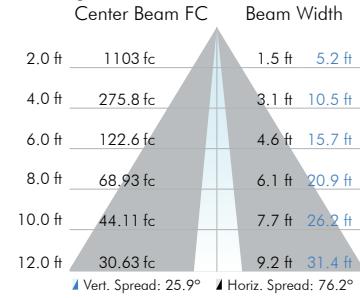


HO Pink

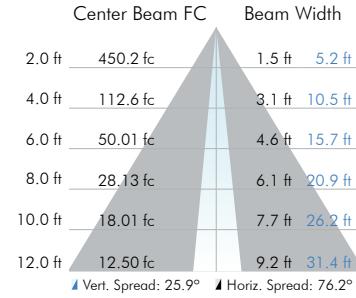


HO Violet

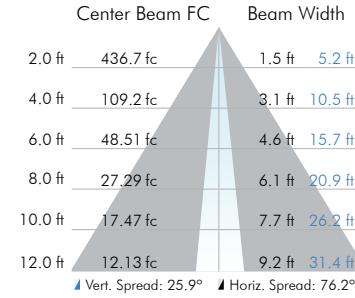


HO Turquoise

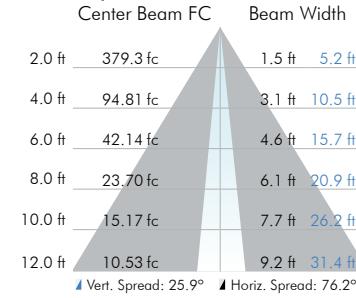


HO Dark Blue

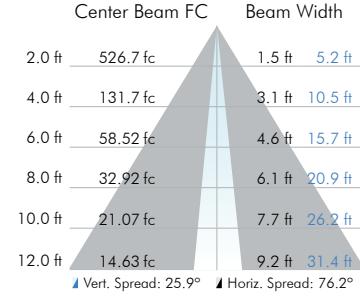


HO Dark Orange

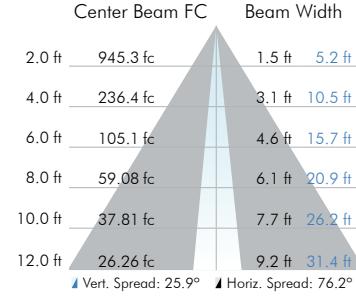


CIE 1931 Chromaticity Diagram

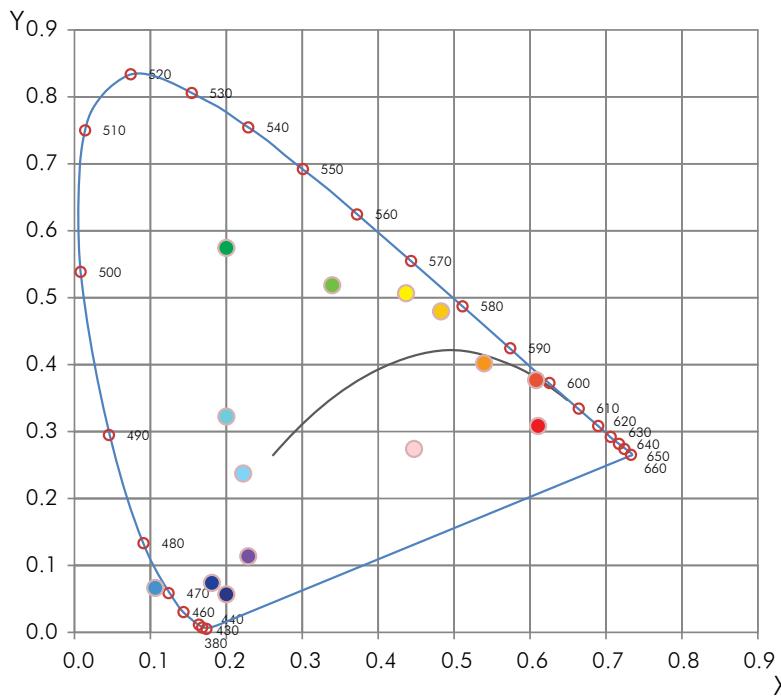


Color	Coordinate	Wavelength
Red	x: 0.6221 y: 0.3174 u: 0.4482 v: 0.5111	620nm
Green	x: 0.2075 y: 0.5883 u: 0.0835 v: 0.5445	520nm
Blue	x: 0.1804 y: 0.0715 u: 0.2158 v: 0.1834	445nm
Amber	x: 0.5415 y: 0.4189 u: 0.3145 v: 0.5412	611nm
Yellow	x: 0.4441 y: 0.5161 u: 0.2140 v: 0.5593	557nm
Golden Yellow	x: 0.4814 y: 0.4892 u: 0.2438 v: 0.5568	583nm
Ice Blue	x: 0.2317 y: 0.2495 u: 0.1676 v: 0.4059	446nm
Cyan	x: 0.1158 y: 0.0735 u: 0.3234 v: 0.5522	473nm
Light Green	x: 0.3458 y: 0.5241 u: 0.1611 v: 0.5487	534nm
Pink	x: 0.4547 y: 0.2832 u: 0.3342 v: 0.4649	621nm
Violet	x: 0.2337 y: 0.1275 u: 0.2301 v: 0.2823	448nm
Turquoise	x: 0.2047 y: 0.3361 u: 0.1852 v: 0.5652	485nm
Dark Blue	x: 0.1542 y: 0.0259 u: 0.2055 v: 0.0776	443nm
Dark Orange	x: 0.6130 y: 0.3791 u: 0.3878 v: 0.5396	622nm



UL / cUL Non-dimming

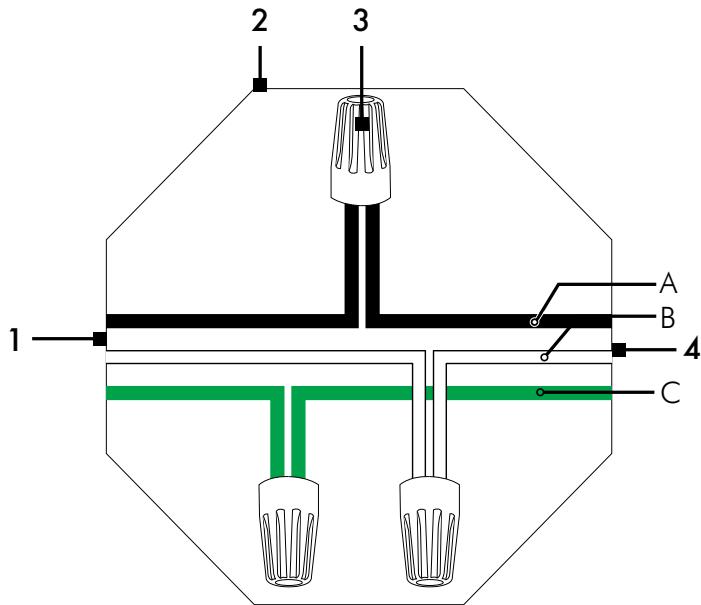

UL / cUL ELV Dimming

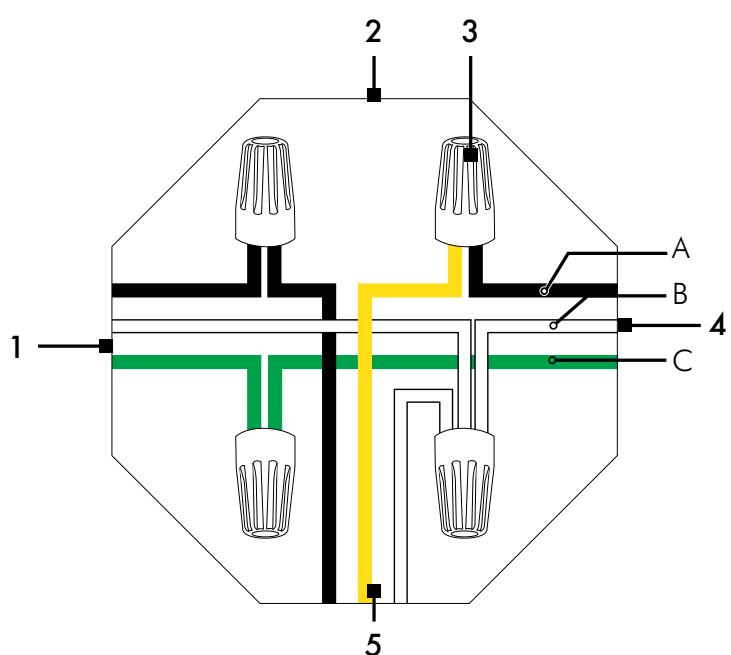

Wiring Legend

1	Power 100-277V AC
2	Junction Box
3	Wiring Nuts
4	3 Pin Leader Cable
5	ELV Dimmer


3 Pin Leader Cable

	UL/cUL	CE/CCC*
A Live 100-277V	— Black	— Brown
B Neutral	== White	— Blue
C Ground	— Green	— Green/ Yellow


*Not illustrated

ELV Connectors


Female Output

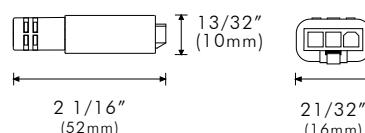

Male Output

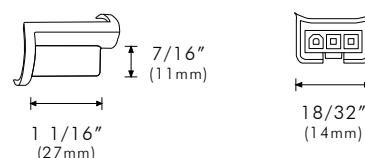


Angle Adjustment




Compatible Dimmers

- Vantage STPERW101
- Grafik Eye QS with Grafik Eye PHPM-PA-DVWH
- Legrand HDA-703-1
- Legrand RH703PTUTC
- Lutron MAELV-600 (600W)
- Lutron Skylark SELV-300P (300W)
- Leviton MNE04 (400W)
- Lutron Diva DVELV-300P (300W)
- Lutron Diva DVELV-300P (300W) Adjusted
- Lutron Diva DVCLA-153P (150W)

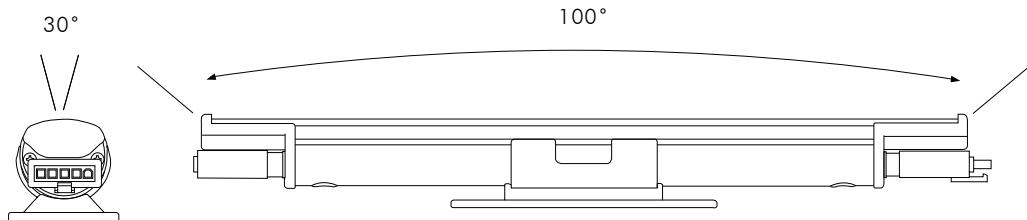

Wallwash Optic.

Wall wash any indoor application with its integral linear optic of 30° x 100° for a precise beam pattern with no color over angle, no striations and no dark spots up to 20ft (6m).

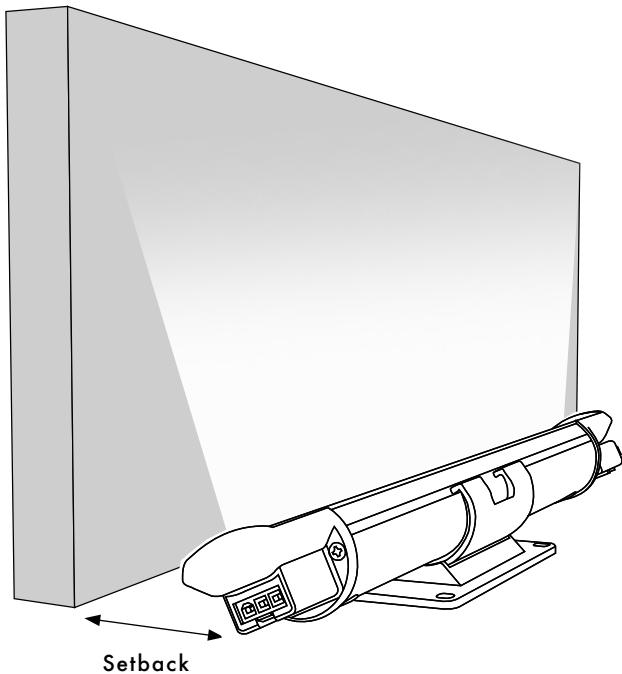


Setback Chart

10ft Wall

1ft


Recommended Setback from wall is 1/10 of wall height.

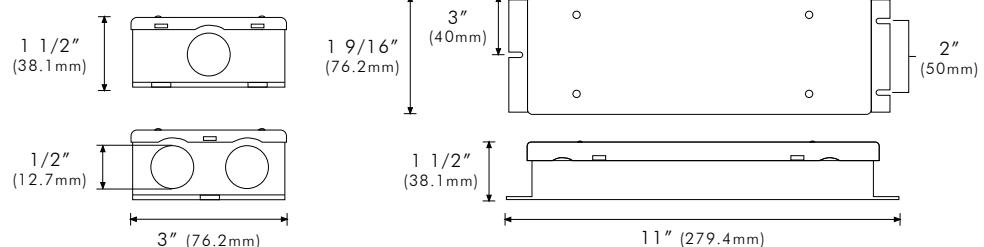

MODA BRIDGE 1

Converting 0-10V to ELV.

MODA BRIDGE 1 solves many installation issues. It accepts a standard 0-10V signal from most dimmers and dimming systems and internally converts this signal into a Electronic Low Voltage (ELV) signal. Thus enabling 0-10V control of an ELV fixture. It is optimized to perform precise smooth flicker free dimming down to 0%. Simple wiring with its integral 1/2" holes which accepts liquid tight or interior conduit connectors. Wire to any 100-277V 50/60 Hz feed. Power up to 1000W of fixtures at 120V and 2000W at 277V. Fully potted enables the installer to mount this product virtually anywhere with its Wet Location IP65 rating. Fully protected from surge, short circuit, open circuit and over temperature. Power Input and data interface protected with High Grade Surge Protection. Designed and developed by MODA LIGHT, Las Vegas USA

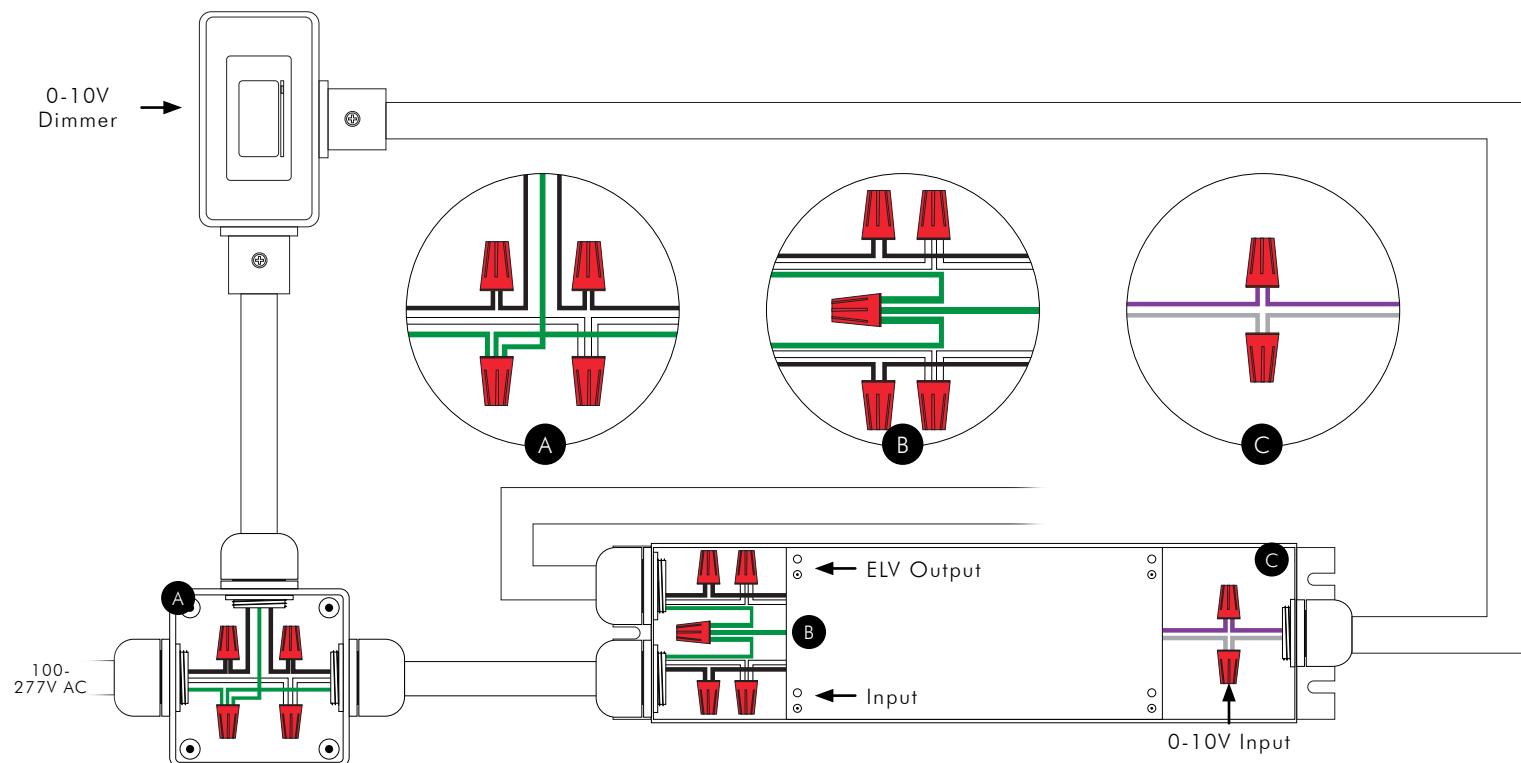

Input



	UL/cUL	CE/CCC*
Live 100-277V	— Black	— Brown
Neutral	— White	— Blue
Ground	— Green	— Green/Yellow
Data +	— Purple	— Black
Data -	— Grey	— Grey

*Not illustrated

Output

	UL/cUL	CE/CCC*
Live 100-277V	— Black	— Brown
Neutral	— White	— Blue
Ground	— Green	— Green/Yellow

*Not illustrated

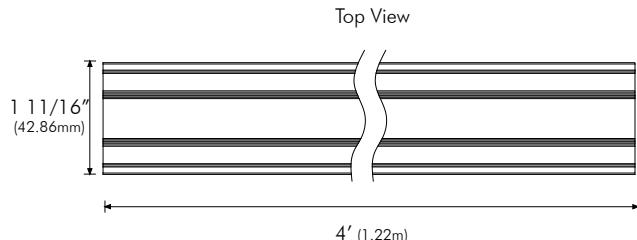

MODA MINI GRAZE MOUNTING TRACK

Mounting Mini Graze.

Allows users to install Moda Mini Graze fixtures in a continuous linear position. Moda Mini Graze Mounting Tracks come packaged in 5 pieces of 4ft sections to create a continuous run of 20ft.

Options

Finish G - Gray


Length 4ft - 4' Sections




Quantity 5 Pieces (20ft)

Physical

Applications Graze, Accent

Construction Polycarbonate

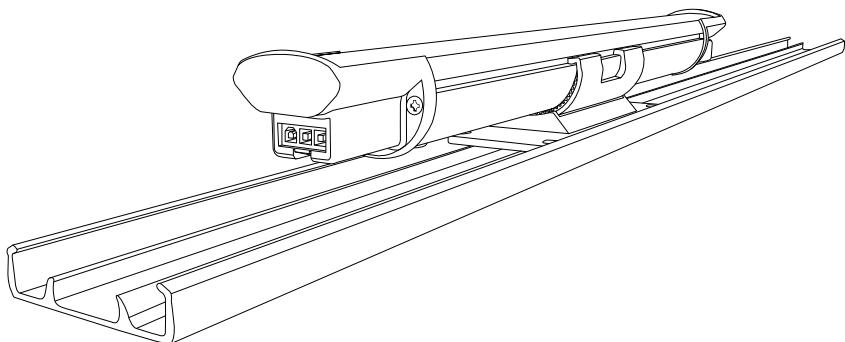

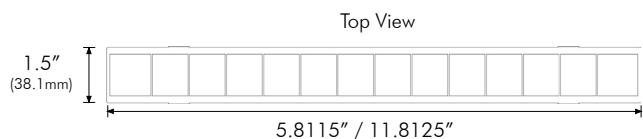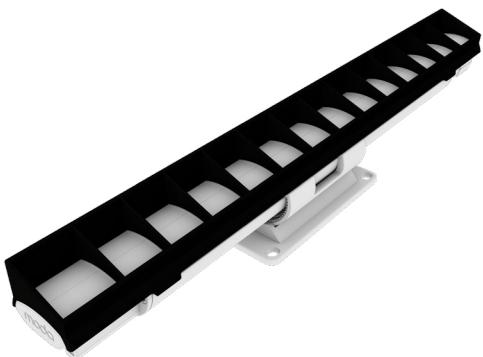

MODA MINI COVE LOUVRES ASYMMETRIC

Asymmetric Mini Cove.

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. For four foot fixtures use four of these louvres.

Options


Finish B - BLACK




Length 1ft

Physical

Applications Cove, Accent, Graze

Construction ABS

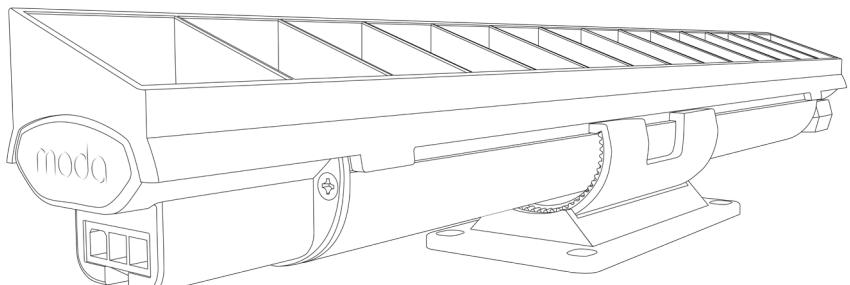

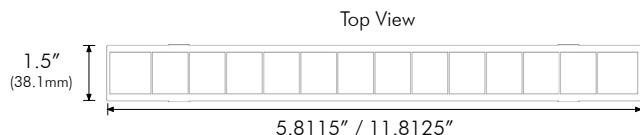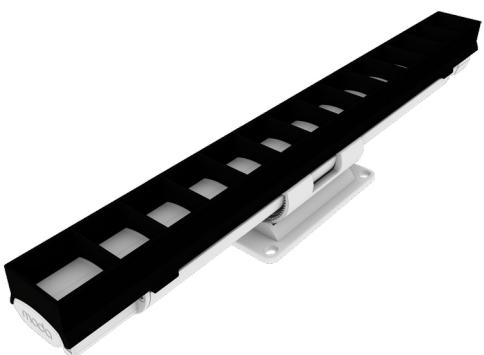

MODA MINI COVE LOUVRES SYMMETRIC

Symmetric Mini Cove.

Provides light control and cutoff of glare for cove and wall grazing applications without causing significant light loss. For four foot fixtures use four of these louvres.

Options


Finish B - BLACK




Length 1ft

Physical

Applications Cove, Accent, Graze

Construction ABS

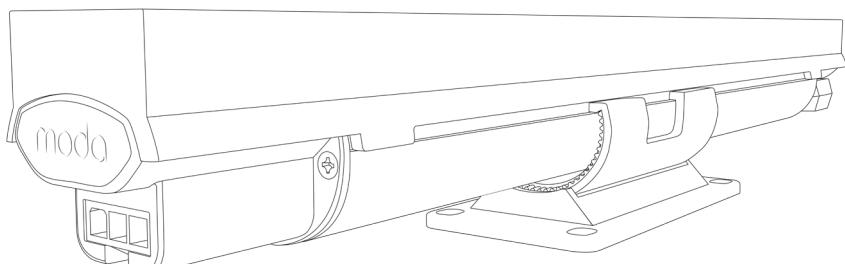

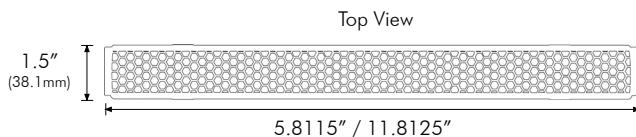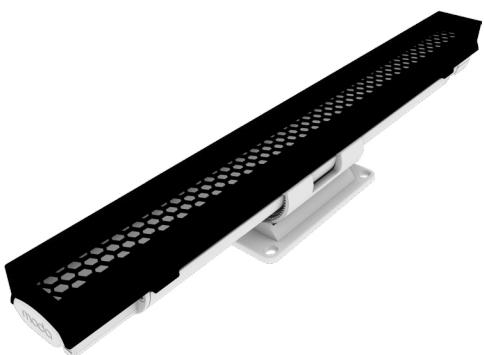

MODA MINI COVE LOUVRES HONEYCOMB

Honeycomb Mini Cove.

Provides light control and cutoff of glare for cove and wall grazing semi direct view applications. For four foot fixtures use four of these louvres.

Options


Finish B - BLACK

Length 1ft

Physical

Applications Cove, Accent, Graze


Construction ABS

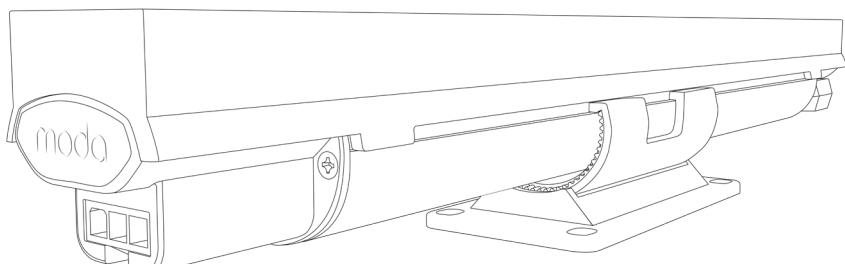

ELV LEADER CABLES


Moda Mini Cove Interior 3 Pin Leader Cables

	UL/cUL	EU/CCC
Lengths	10ft and 25ft	3m and 7.62m
Color	White	White

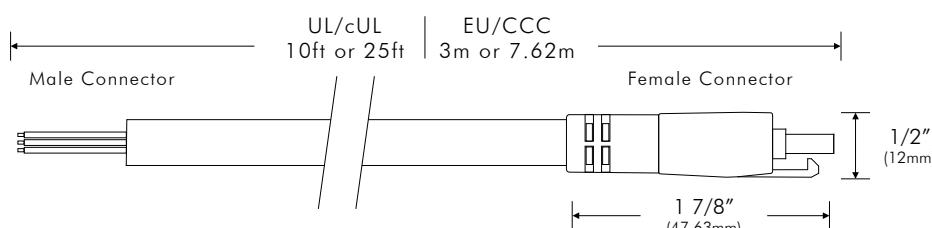


Female Connector

Front Top



Pin Assignment




	UL/cUL	EU/CCC
1	Live 100-277V	Black Brown
2	Ground	Green Green/Yellow
3	Neutral	White Blue

ELV JUMPER CABLES



Moda Mini Cove Interior 3 Pin Jumper Cables

	UL/cUL	EU/CCC
Lengths	1ft and 4ft	300mm and 1m
Color	White	White

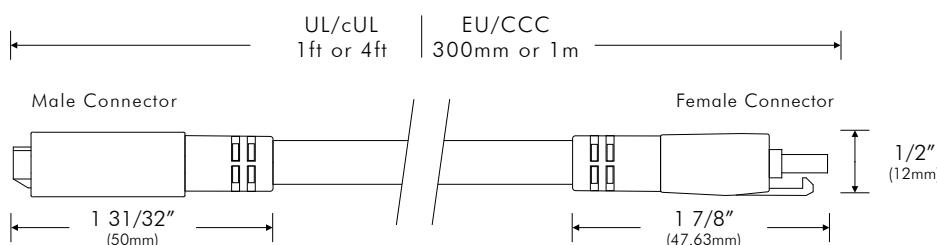


Connectors

Front Top




Pin Assignment



Female

	UL/cUL	EU/CCC
1	Live 100-277V	Black Brown
2	Ground	Green Green/Yellow
3	Neutral	White Blue



Male

	UL/cUL	EU/CCC
1	Neutral	White Blue
2	Ground	Green Green/Yellow
3	Live 100-277V	Black Brown

Fixture	Ordering Number	Part Number
Moda Mini Graze Interior Standard Output Silver ELV Dimming Red 6IN 30X100	MMGI-S-S-E-R-6-310	131-0000
Moda Mini Graze Interior Standard Output Silver ELV Dimming Green 6IN 30X100	MMGI-S-S-E-G-6-310	131-0001
Moda Mini Graze Interior Standard Output Silver ELV Dimming Blue 6IN 30X100	MMGI-S-S1-S-E-B-6-310	131-0002
Moda Mini Graze Interior Standard Output Silver ELV Dimming Amber 6IN 30X100	MMGI-S-S1-S-E-A-6-310	131-0003
Moda Mini Graze Interior Standard Output Silver ELV Dimming Yellow 6IN 30X100	MMGI-S-S1-S-E-Y-6-310	131-0004
Moda Mini Graze Interior Standard Output Silver ELV Dimming Pink 6IN 30X100	MMGI-S-S1-S-E-P-6-310	131-0005
Moda Mini Graze Interior Standard Output Silver ELV Dimming Cyan 6IN 30X100	MMGI-S-S1-S-E-C-6-310	131-0006
Moda Mini Graze Interior Standard Output Silver ELV Dimming Violet 6IN 30X100	MMGI-S-S1-S-E-V-6-310	131-0007
Moda Mini Graze Interior Standard Output Silver ELV Dimming Turquoise 6IN 30X100	MMGI-S-S1-S-E-TQ-6-310	131-0008
Moda Mini Graze Interior Standard Output Silver ELV Dimming Ice Blue 6IN 30X100	MMGI-S-S1-S-E-IB-6-310	131-0009
Moda Mini Graze Interior Standard Output Silver ELV Dimming Light Green 6IN 30X100	MMGI-S-S1-S-E-LG-6-310	131-0010
Moda Mini Graze Interior Standard Output Silver ELV Dimming Golden Yellow 6IN 30X100	MMGI-S-S1-S-E-GY-6-310	131-0011
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Blue 6IN 30X100	MMGI-S-S1-S-E-DB-6-310	131-0012
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Orange 6IN 30X100	MMGI-S-S1-S-E-DO-6-310	131-0013
Moda Mini Graze Interior Standard Output Silver ELV Dimming Red 1FT 30X100	MMGI-S-S-E-R-1-310	131-1000
Moda Mini Graze Interior Standard Output Silver ELV Dimming Green 1FT 30X100	MMGI-S-S-E-G-1-310	131-1001
Moda Mini Graze Interior Standard Output Silver ELV Dimming Blue 1FT 30X100	MMGI-S-S1-S-E-B-1-310	131-1002
Moda Mini Graze Interior Standard Output Silver ELV Dimming Amber 1FT 30X100	MMGI-S-S1-S-E-A-1-310	131-1003
Moda Mini Graze Interior Standard Output Silver ELV Dimming Yellow 1FT 30X100	MMGI-S-S1-S-E-Y-1-310	131-1004
Moda Mini Graze Interior Standard Output Silver ELV Dimming Pink 1FT 30X100	MMGI-S-S1-S-E-P-1-310	131-1005
Moda Mini Graze Interior Standard Output Silver ELV Dimming Cyan 1FT 30X100	MMGI-S-S1-S-E-C-1-310	131-1006
Moda Mini Graze Interior Standard Output Silver ELV Dimming Violet 1FT 30X100	MMGI-S-S1-S-E-V-1-310	131-1007
Moda Mini Graze Interior Standard Output Silver ELV Dimming Turquoise 1FT 30X100	MMGI-S-S1-S-E-TQ-1-310	131-1008
Moda Mini Graze Interior Standard Output Silver ELV Dimming Ice Blue 1FT 30X100	MMGI-S-S1-S-E-IB-1-310	131-1009
Moda Mini Graze Interior Standard Output Silver ELV Dimming Light Green 1FT 30X100	MMGI-S-S1-S-E-LG-1-310	131-1010
Moda Mini Graze Interior Standard Output Silver ELV Dimming Golden Yellow 1FT 30X100	MMGI-S-S1-S-E-GY-1-310	131-1011
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Blue 1FT 30X100	MMGI-S-S1-S-E-DB-1-310	131-1012
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Orange 1FT 30X100	MMGI-S-S1-S-E-DO-1-310	131-1013
Moda Mini Graze Interior High Output Silver ELV Dimming Red 1FT 30X100	MMGI-H-S-E-R-1-310	131-1200
Moda Mini Graze Interior High Output Silver ELV Dimming Green 1FT 30X100	MMGI-H-S-E-G-1-310	131-1201
Moda Mini Graze Interior High Output Silver ELV Dimming Blue 1FT 30X100	MMGI-H-S1-S-E-B-1-310	131-1202
Moda Mini Graze Interior High Output Silver ELV Dimming Amber 1FT 30X100	MMGI-H-S1-S-E-A-1-310	131-1203
Moda Mini Graze Interior High Output Silver ELV Dimming Yellow 1FT 30X100	MMGI-H-S1-S-E-Y-1-310	131-1204
Moda Mini Graze Interior High Output Silver ELV Dimming Pink 1FT 30X100	MMGI-H-S1-S-E-P-1-310	131-1205
Moda Mini Graze Interior High Output Silver ELV Dimming Cyan 1FT 30X100	MMGI-H-S1-S-E-C-1-310	131-1206
Moda Mini Graze Interior High Output Silver ELV Dimming Violet 1FT 30X100	MMGI-H-S1-S-E-V-1-310	131-1207
Moda Mini Graze Interior High Output Silver ELV Dimming Turquoise 1FT 30X100	MMGI-H-S1-S-E-TQ-1-310	131-1208
Moda Mini Graze Interior High Output Silver ELV Dimming Ice Blue 1FT 30X100	MMGI-H-S1-S-E-IB-1-310	131-1209
Moda Mini Graze Interior High Output Silver ELV Dimming Light Green 1FT 30X100	MMGI-H-S1-S-E-LG-1-310	131-1210
Moda Mini Graze Interior High Output Silver ELV Dimming Golden Yellow 1FT 30X100	MMGI-H-S1-S-E-GY-1-310	131-1211
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Blue 1FT 30X100	MMGI-H-S1-S-E-DB-1-310	131-1212
Moda Mini Graze Interior High Output Silver ELV Dimming Dark Orange 1FT 30X100	MMGI-H-S1-S-E-DO-1-310	131-1213

FIXTURE	ORDERING NUMBER	PART NUMBER	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Red 4FT 30X100	MMGI-S-S-E-R-4-310	131-3000	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Green 4FT 30X100	MMGI-S-S-E-G-4-310	131-3001	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Blue 4FT 30X100	MMGI-S-S1-S-E-B-4-310	131-3002	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Amber 4FT 30X100	MMGI-S-S1-S-E-A-4-310	131-3003	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Yellow 4FT 30X100	MMGI-S-S1-S-E-Y-4-310	131-3004	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Pink 4FT 30X100	MMGI-S-S1-S-E-P-4-310	131-3005	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Cyan 4FT 30X100	MMGI-S-S1-S-E-C-4-310	131-3006	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Violet 4FT 30X100	MMGI-S-S1-S-E-V-4-310	131-3007	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Turquoise 4FT 30X100	MMGI-S-S1-S-E-TQ-4-310	131-3008	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Ice Blue 4FT 30X100	MMGI-S-S1-S-E-IB-4-310	131-3009	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Light Green 4FT 30X100	MMGI-S-S1-S-E-LG-4-310	131-3010	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Golden Yellow 4FT 30X100	MMGI-S-S1-S-E-GY-4-310	131-3011	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Blue 4FT 30X100	MMGI-S-S1-S-E-DB-4-310	131-3012	
Moda Mini Graze Interior Standard Output Silver ELV Dimming Dark Orange 4FT 30X100	MMGI-S-S1-S-E-DO-4-310	131-3013	
ELV SO 4FT	Moda Mini Graze Interior High Output Silver ELV Dimming Red 4FT 30X100	MMGI-H-S-E-R-4-310	131-3200
	Moda Mini Graze Interior High Output Silver ELV Dimming Green 4FT 30X100	MMGI-H-S-E-G-4-310	131-3201
	Moda Mini Graze Interior High Output Silver ELV Dimming Blue 4FT 30X100	MMGI-H-S1-S-E-B-4-310	131-3202
	Moda Mini Graze Interior High Output Silver ELV Dimming Amber 4FT 30X100	MMGI-H-S1-S-E-A-4-310	131-3203
	Moda Mini Graze Interior High Output Silver ELV Dimming Yellow 4FT 30X100	MMGI-H-S1-S-E-Y-4-310	131-3204
	Moda Mini Graze Interior High Output Silver ELV Dimming Pink 4FT 30X100	MMGI-H-S1-S-E-P-4-310	131-3205
	Moda Mini Graze Interior High Output Silver ELV Dimming Cyan 4FT 30X100	MMGI-H-S1-S-E-C-4-310	131-3206
	Moda Mini Graze Interior High Output Silver ELV Dimming Violet 4FT 30X100	MMGI-H-S1-S-E-V-4-310	131-3207
	Moda Mini Graze Interior High Output Silver ELV Dimming Turquoise 4FT 30X100	MMGI-H-S1-S-E-TQ-4-310	131-3208
	Moda Mini Graze Interior High Output Silver ELV Dimming Ice Blue 4FT 30X100	MMGI-H-S1-S-E-IB-4-310	131-3209
	Moda Mini Graze Interior High Output Silver ELV Dimming Light Green 4FT 30X100	MMGI-H-S1-S-E-LG-4-310	131-3210
	Moda Mini Graze Interior High Output Silver ELV Dimming Golden Yellow 4FT 30X100	MMGI-H-S1-S-E-GY-4-310	131-3211
	Moda Mini Graze Interior High Output Silver ELV Dimming Dark Blue 4FT 30X100	MMGI-H-S1-S-E-DB-4-310	131-3212
	Moda Mini Graze Interior High Output Silver ELV Dimming Dark Orange 4FT 30X100	MMGI-H-S1-S-E-DO-4-310	131-3213

ACCESSORIES	DESCRIPTION	ORDERING NUMBER	PART NUMBER
Leader Cable US 3 Pin 10ft	Power to first fixture of run	MLCI-US-3PIN-W-10FT	299-0000
Leader Cable US 3 Pin 25ft	Power to first fixture of run	MLCI-US-3PIN-W-25FT	299-0002
Jumper Cable US 3 Pin 1ft	Connection between fixtures	MJCI-US-3PIN-W-1FT	299-1000
Jumper Cable US 3 Pin 4ft	Connection between fixtures	MJCI-US-3PIN-W-4FT	299-1002
Leader Cable EU 3 Pin 3m	Power to first fixture of run	MLCI-EU-3PIN-W-3M	299-0001
Leader Cable EU 3 Pin 7.62m	Power to first fixture of run	MLCI-EU-3PIN-W-7.62M	299-0003
Jumper Cable EU 3 Pin 300mm	Connection between fixtures	MJCI-EU-3PIN-W-300MM	299-1001
Jumper Cable EU 3 Pin 1m	Connection between fixtures	MJCI-EU-3PIN-W-1M	299-1003
Terminator 3 Pin	Must be fixed to last fixture for safety	MTI-3PIN-W	299-2000
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G	299-3200
Symmetric Louvre	1ft Symmetric louvre for light control	N/A	299-4230
Asymmetric Louvre	1ft Asymmetric louvre for light control	N/A	299-4231
Honeycomb Louvre	1ft Honeycomb louvre for light control	N/A	299-4232

CONTROLS	DESCRIPTION	ORDERING NUMBER	PART NUMBER
Bridge ¹ 2.0 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-S2-S	250-0000