



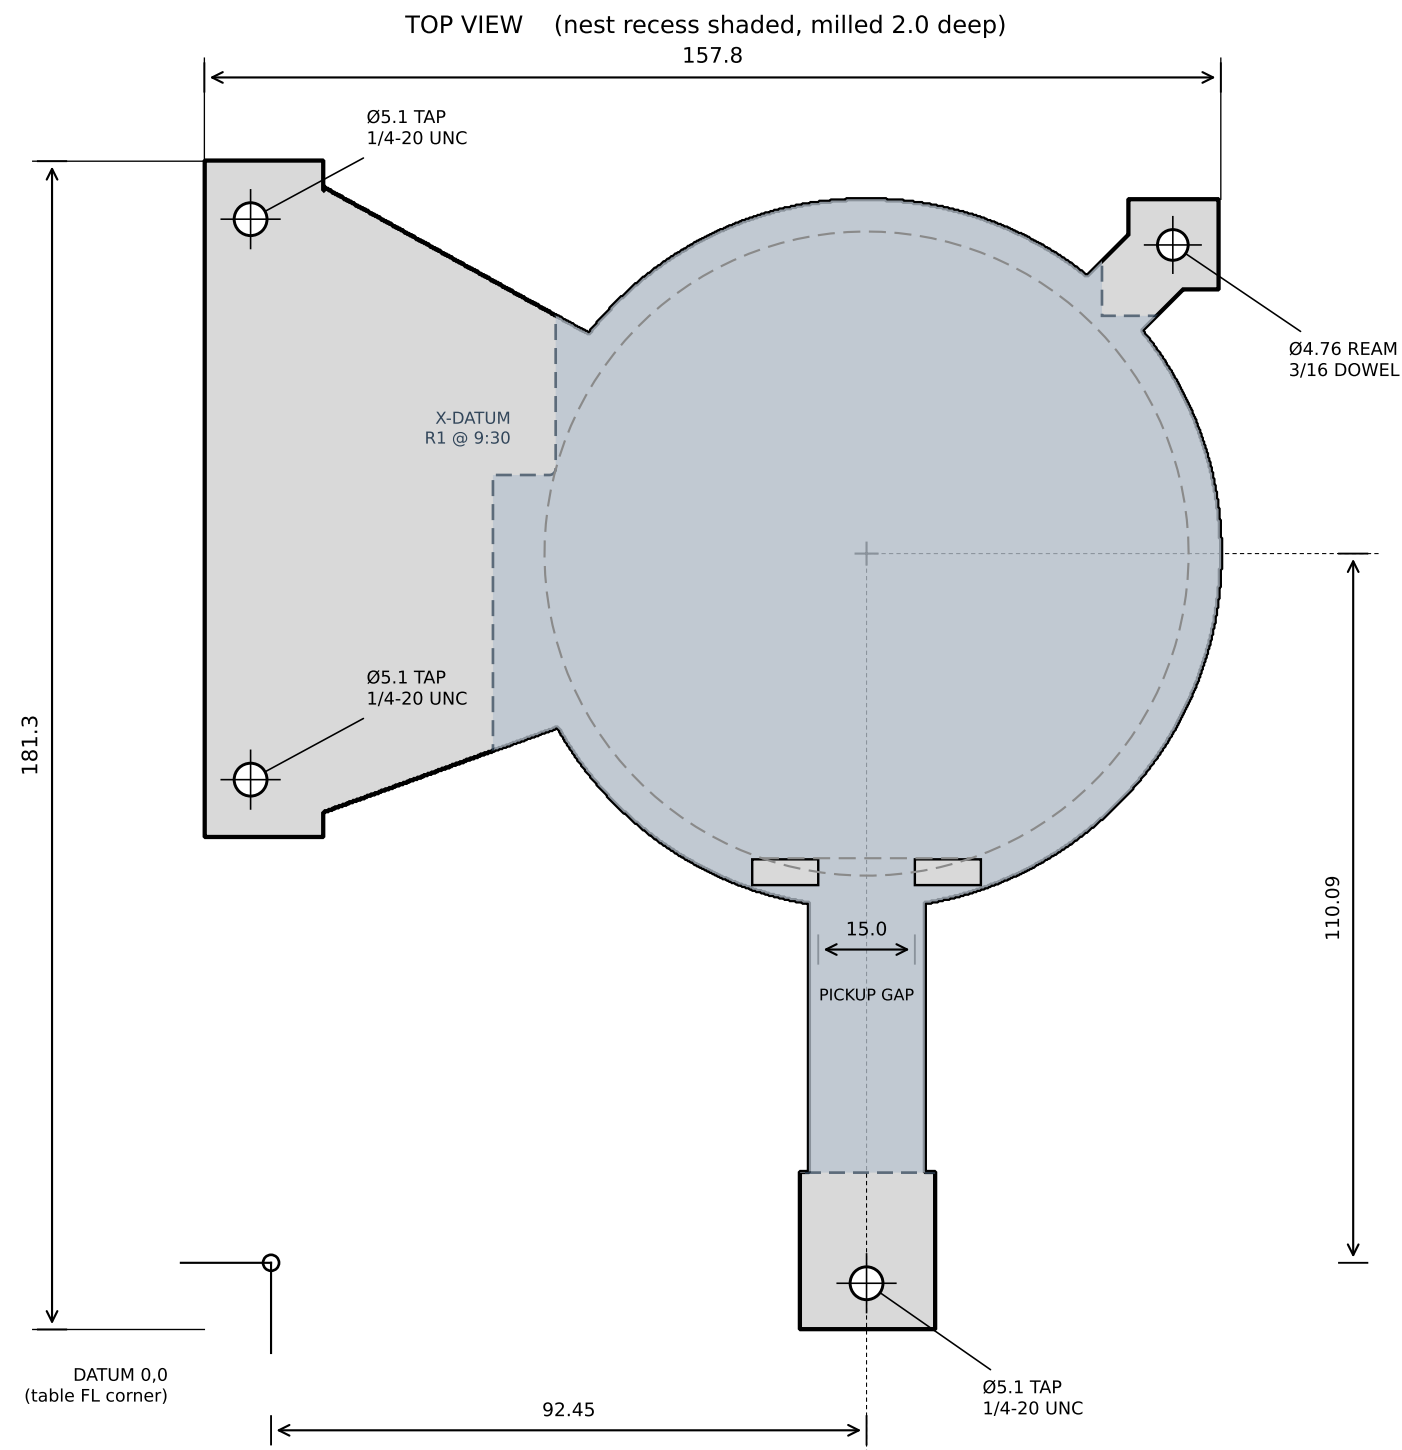

NOTES

1. MATERIAL: 6061-T6 ALUMINUM PLATE, 7.0 mm.
2. PROFILE (outer spider outline) LASER / WATERJET CUT.
3. NEST RECESS + PICKUP GAP MILLED 2.0 mm DEEP (5.0 floor). Recess runs out to the laser-cut edge; anchor pad and the cap above the X-datum are LEFT FULL HEIGHT.
4. WAFER LOCATED BY: primary-flat ridge (Y + rotation) and the R1 X-datum corner tangent to the wafer OD at 9:30 (X). Wafer centre lands at (92.45, 109.92) - matches PLA jig.
5. THREE 1/4-20 UNC TAPPED HOLES (Ø5.1 tap drill): two on the left bar, one on the front foot. Run SET SCREWS so the shanks butt the table front-left edges = X, Y, yaw datums. (Jig is NOT bolted down; rubber band preloads it up/right.)
6. ANCHOR: Ø4.76 (3/16 in) reamed bore, press-fit steel rod standing 15 mm proud; retain with epoxy.
7. BREAK ALL SHARP EDGES 0.3 max. DEBURR.
8. DIMENSIONS IN mm. ORIGIN = TABLE FRONT-LEFT CORNER.
9. GENERAL TOL: ± 0.2 mm; hole positions ± 0.1 mm.

SECTION A-A (rod & set screw shown projected)

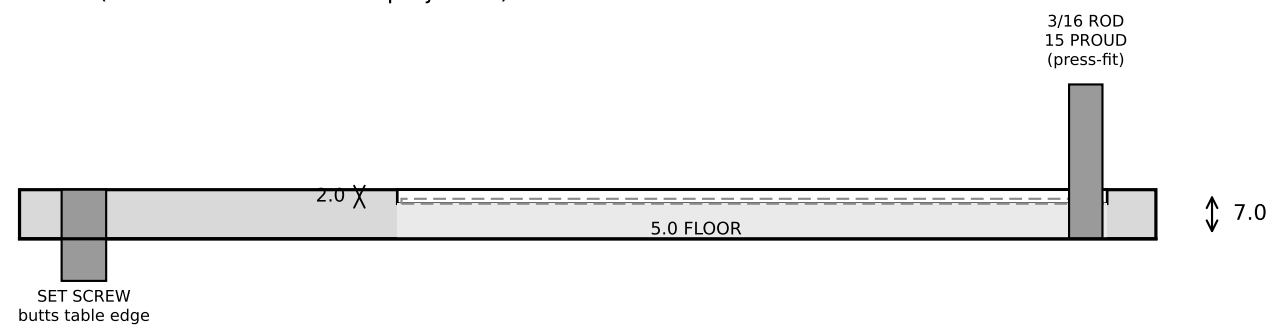

EDGE-DATUM WAFER JIG - ALUMINUM SPIDER

100 mm wafer nest | edge-screw datums

MAT'L: 6061-T6
7 mm PLATE

SCALE 1:1 (A3)

STANFORD UV LASER SINGULATION

DWG No.
EDJ-AL-001

REV A | mm | 3rd ANGLE