



Pre-Lab:

The node uses the twist message to set the velocity of the wheels. This allows the robot to move forwards, backward, and turn left and right. The node subscribes to the cmd_vel topic meaning that we can send commands to the robot to control its velocity.

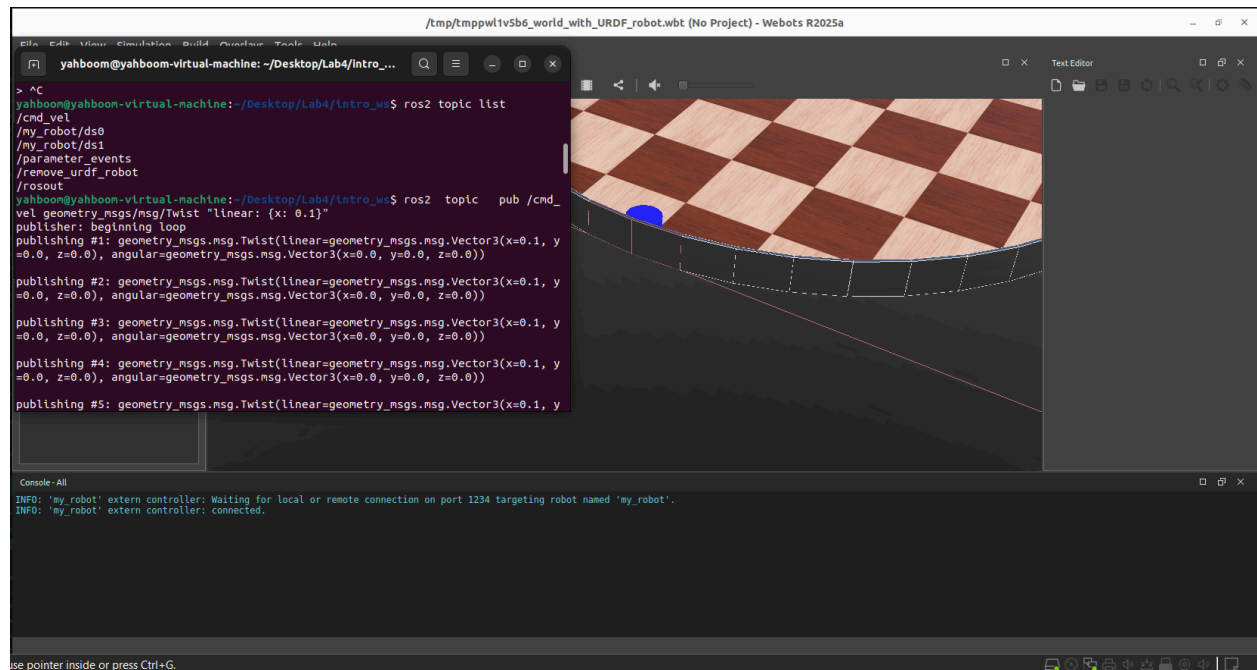


Task 1:

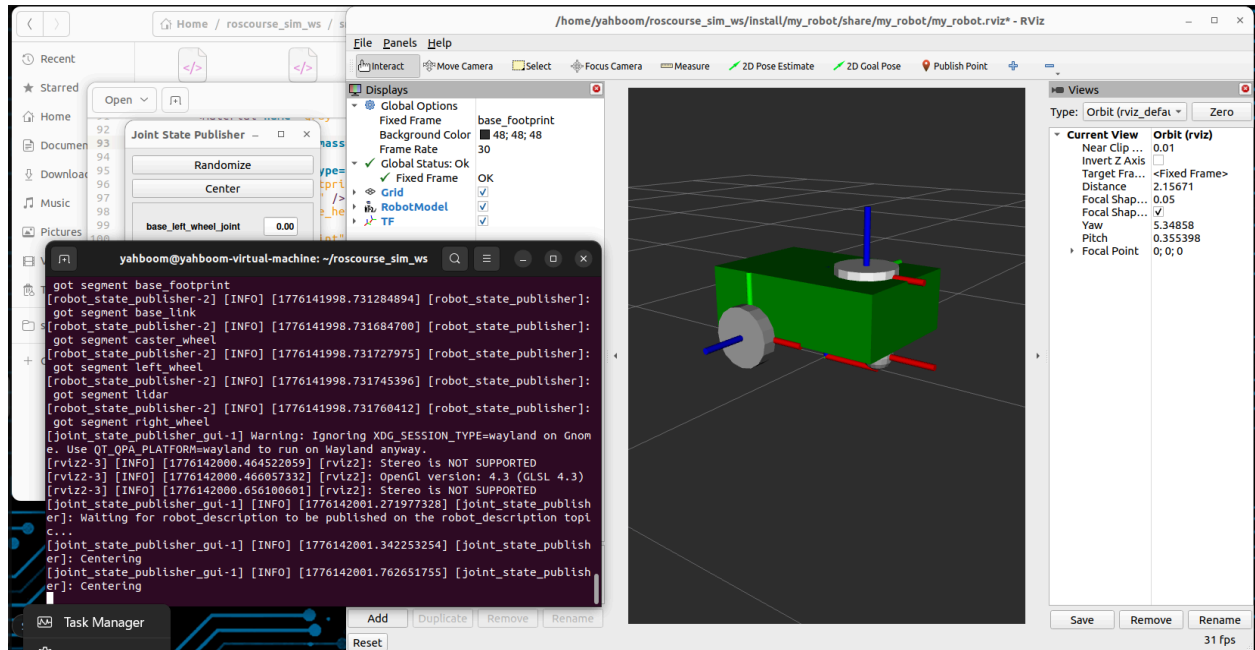

Task 3

Step 2:

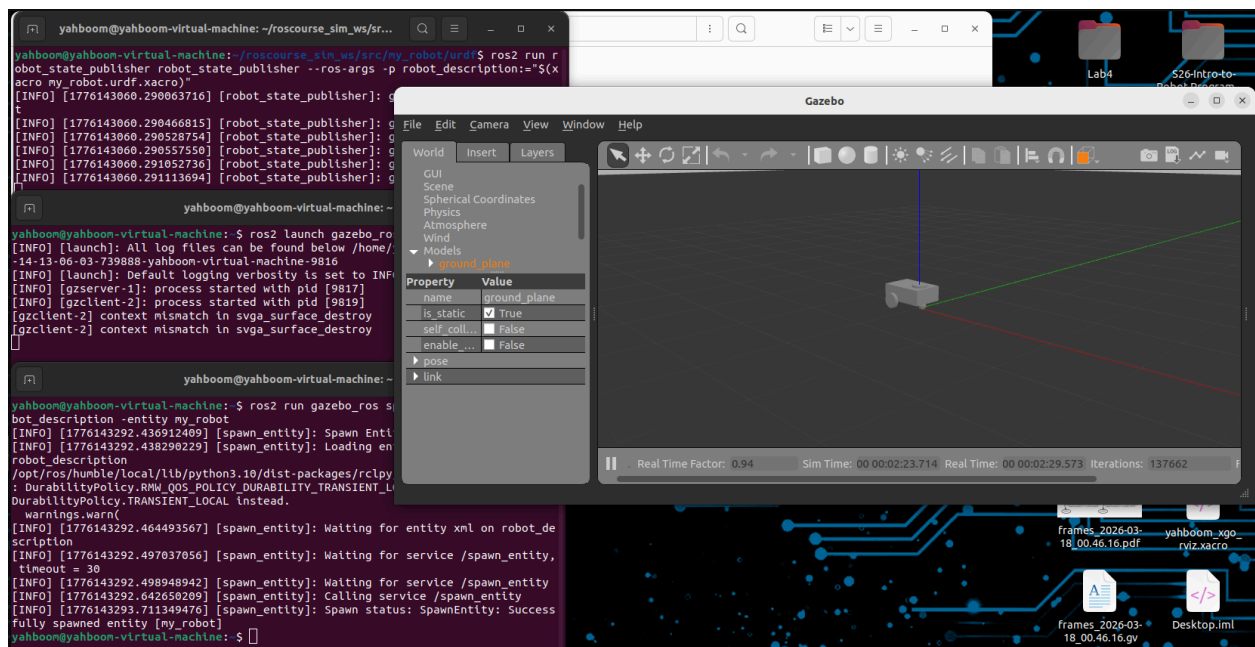

Task 4

