

Emma Wojnarowski
662035363


Pre-Lab 7 Deliverable

Answer to Required Question

The `my_robot_driver` node serves as the interface between ROS 2 and the Webots robot. It subscribes to the `/cmd_vel` topic using the `geometry_msgs/Twist` message type and receives commanded linear (`linear.x`) and angular (`angular.z`) velocities. The node converts these velocity commands into individual left and right wheel velocities using a differential-drive kinematic model and directly commands the wheel motors in Webots. As a result, the robot is capable of moving forward/backward and rotating within the simulation.


Screenshot of Step 14: Webots Opened

Here is a screenshot after sourcing the terminal and running the launch file to open webots.

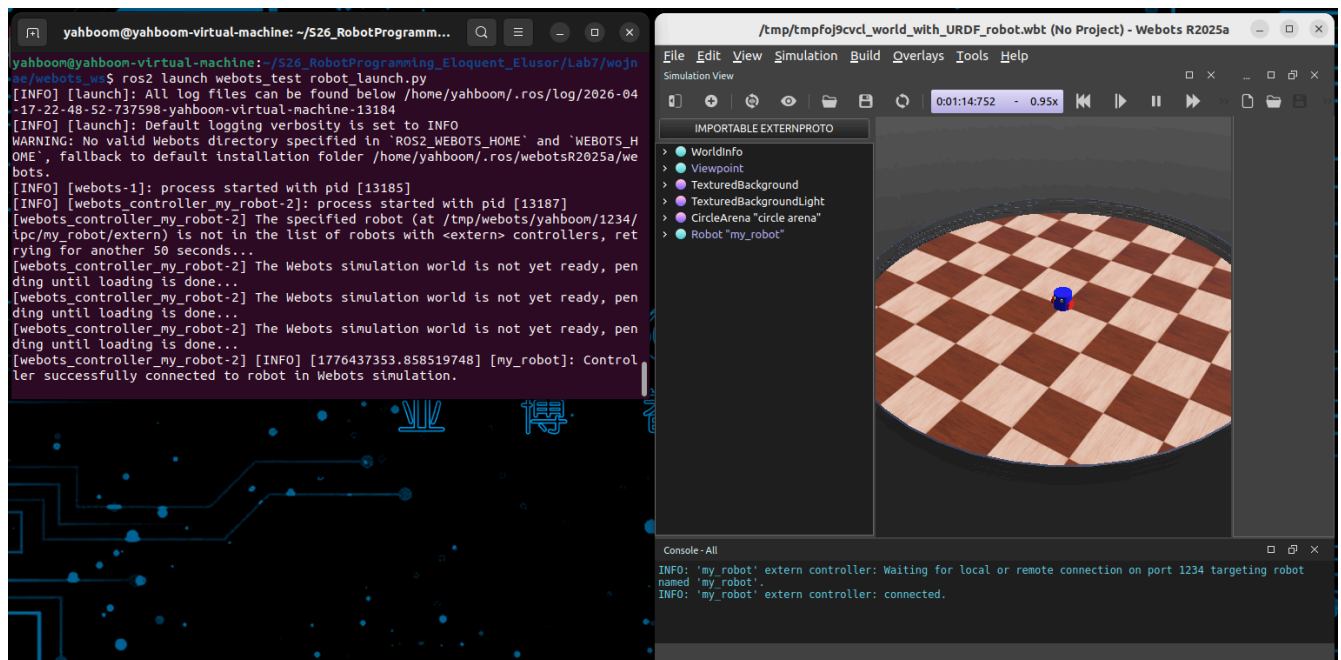

Screenshot of Step 15: Simulation Running

Here is a screenshot showing the simulation running (The robot moving in a line)

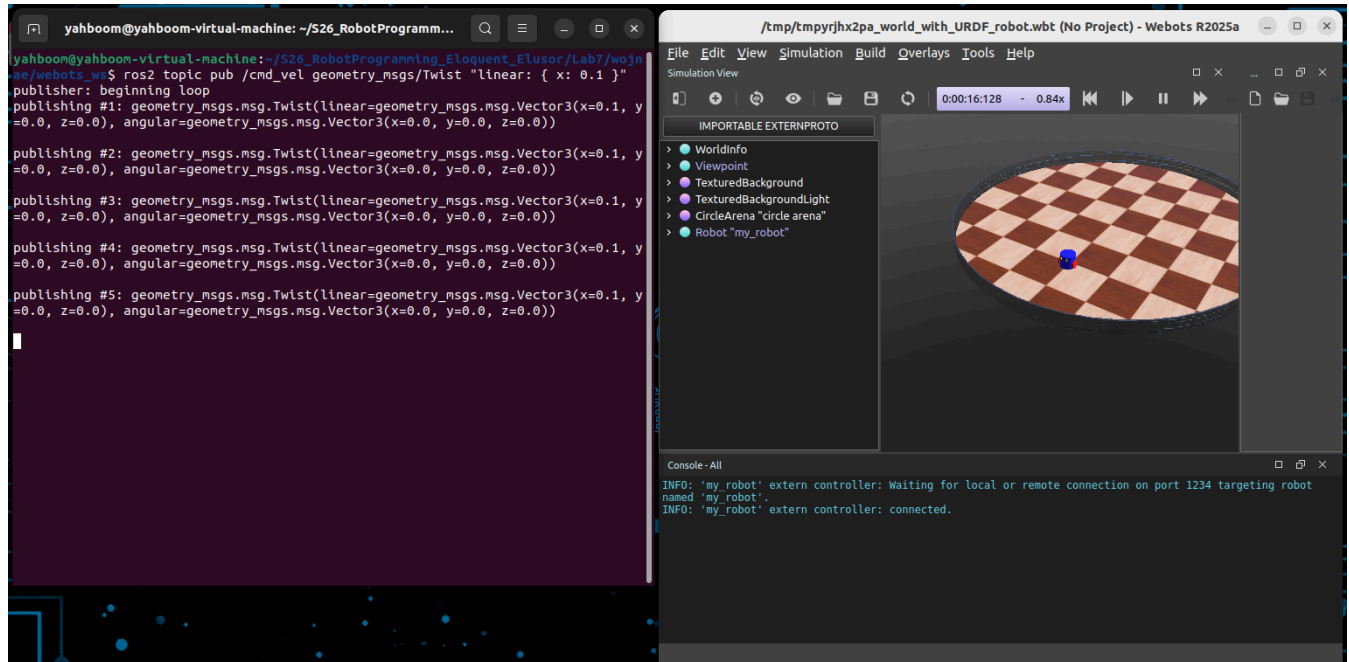

Here is a screenshot showing the ending of the simulation running (The robot hits the wall)

