




No active filter

<div><div></div><div>[Hidden Network]</div><div>9e:a3:a9:1e:18:8c</div></div>	<div>[RSN-PSK-CCMP][ESS]</div>	<div>2.4:7(20)</div> <div>N72</div>	<div>-73 dBm</div> <div>≥1 Mbps</div>
<div><div></div><div>[Hidden Network]</div><div>9e:a3:a9:1f:16:71</div></div>	<div>[RSN-PSK-CCMP][ESS]</div>	<div>2.4:7(20)</div> <div>N72</div>	<div>-83 dBm</div> <div>≥1 Mbps</div>
<div><div></div><div>OIT</div><div>TP-LINKT_60:5c:24</div></div>	<div>[RSN-PSK-CCMP+TKIP]</div> <div>[WPA-PSK-CCMP+TKIP][ESS]</div>	<div>2.4:11(20)</div> <div>N217</div>	<div>-91 dBm</div> <div>≥1 Mbps</div>

RSSI history (all filtered signals)

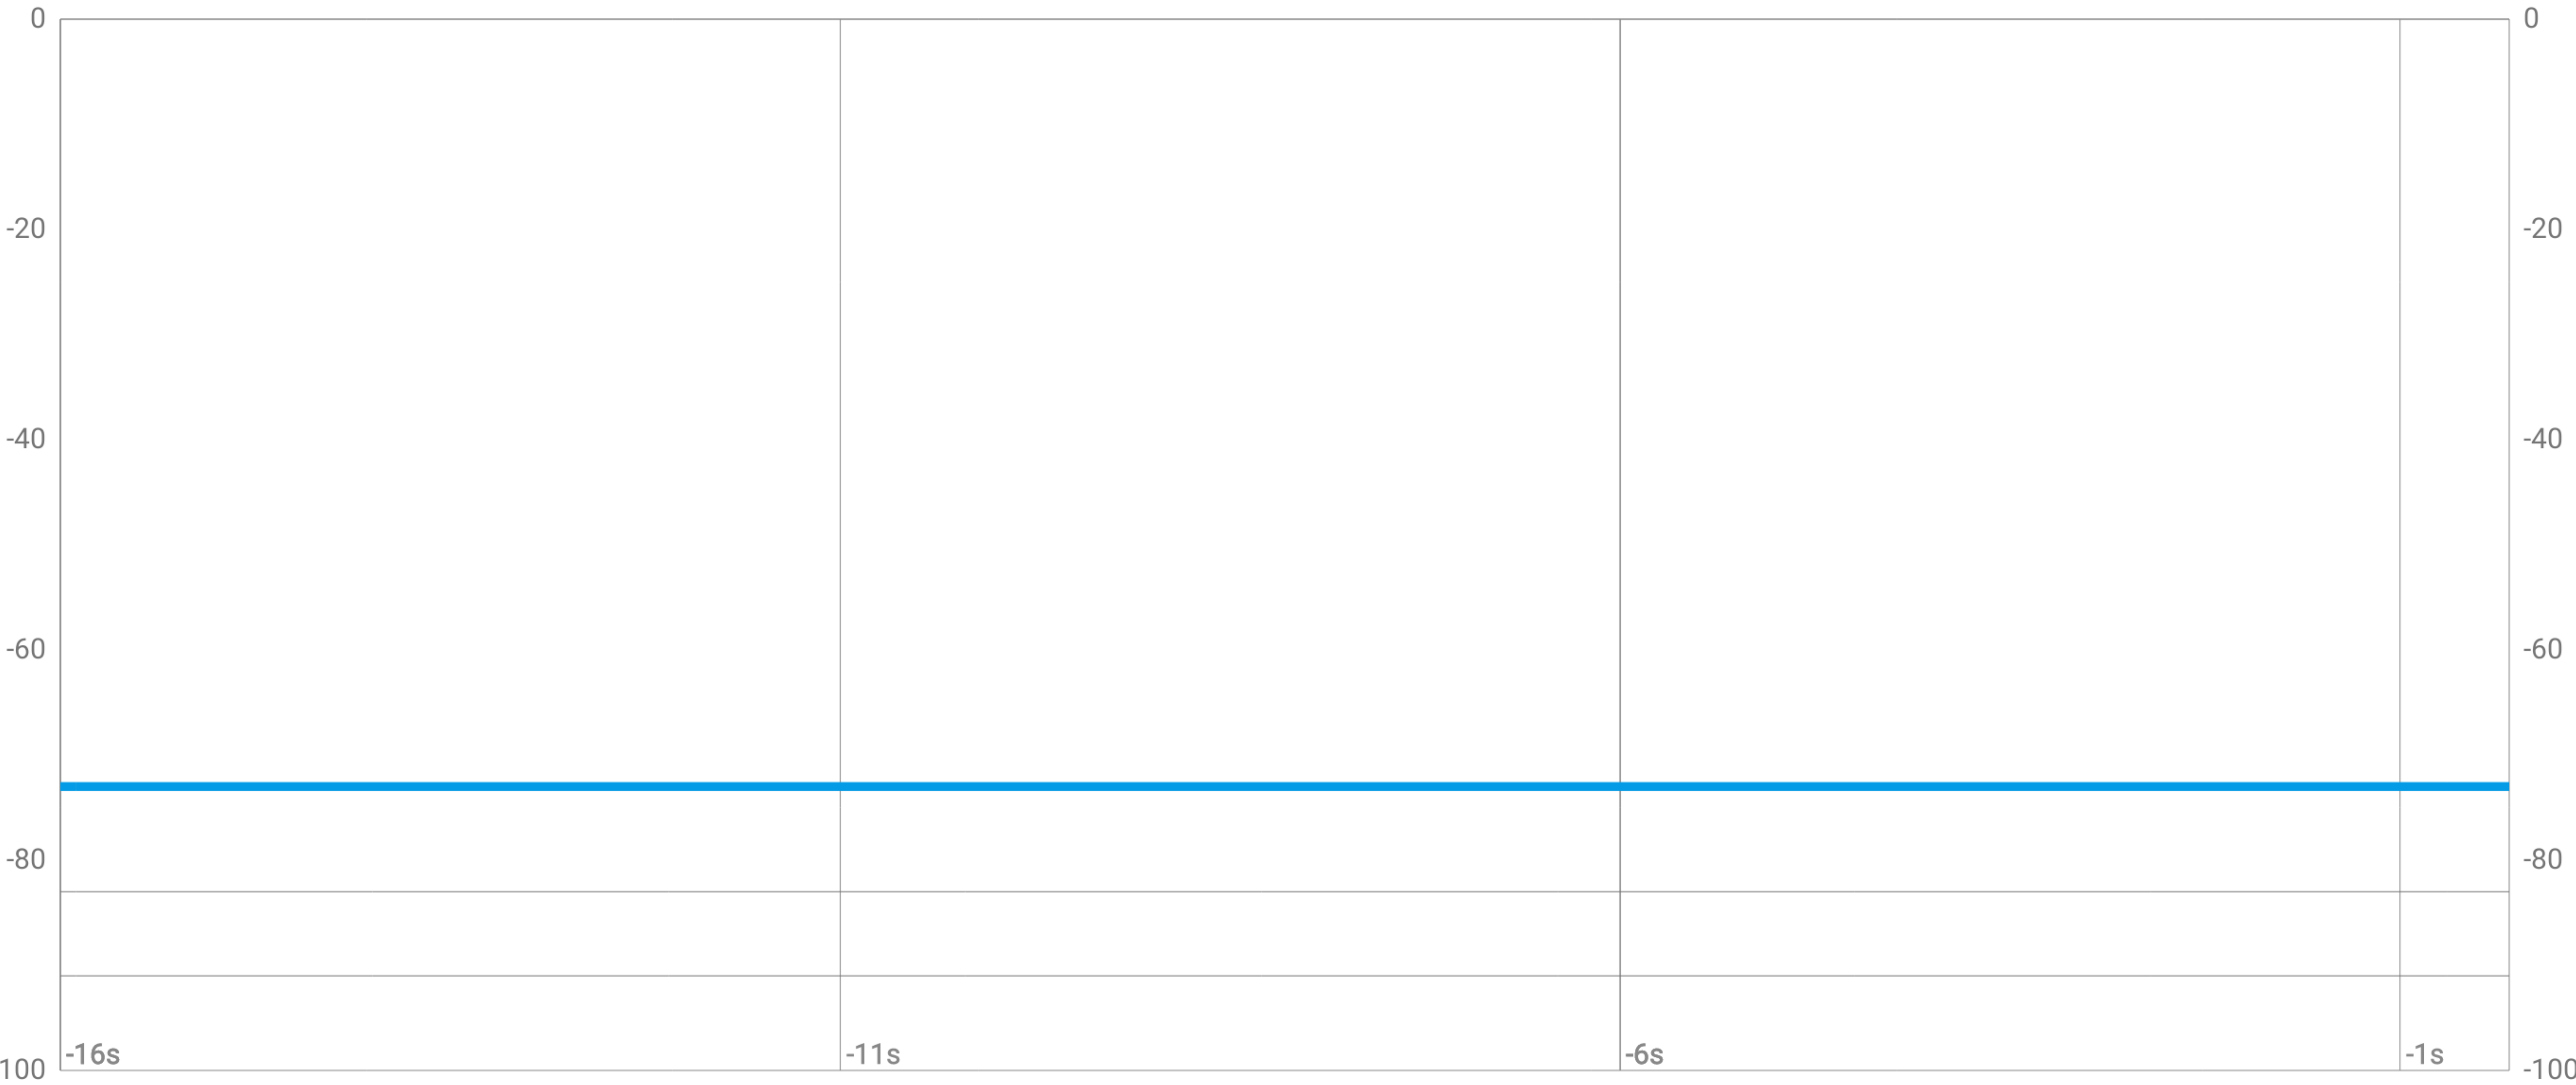

Signals overlapping with [Hidden Network]/9e:a3:a9:1e:18:8c

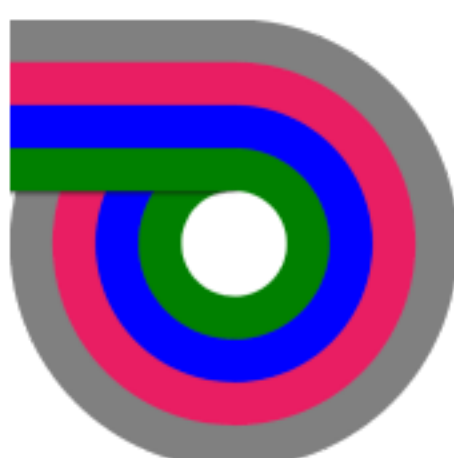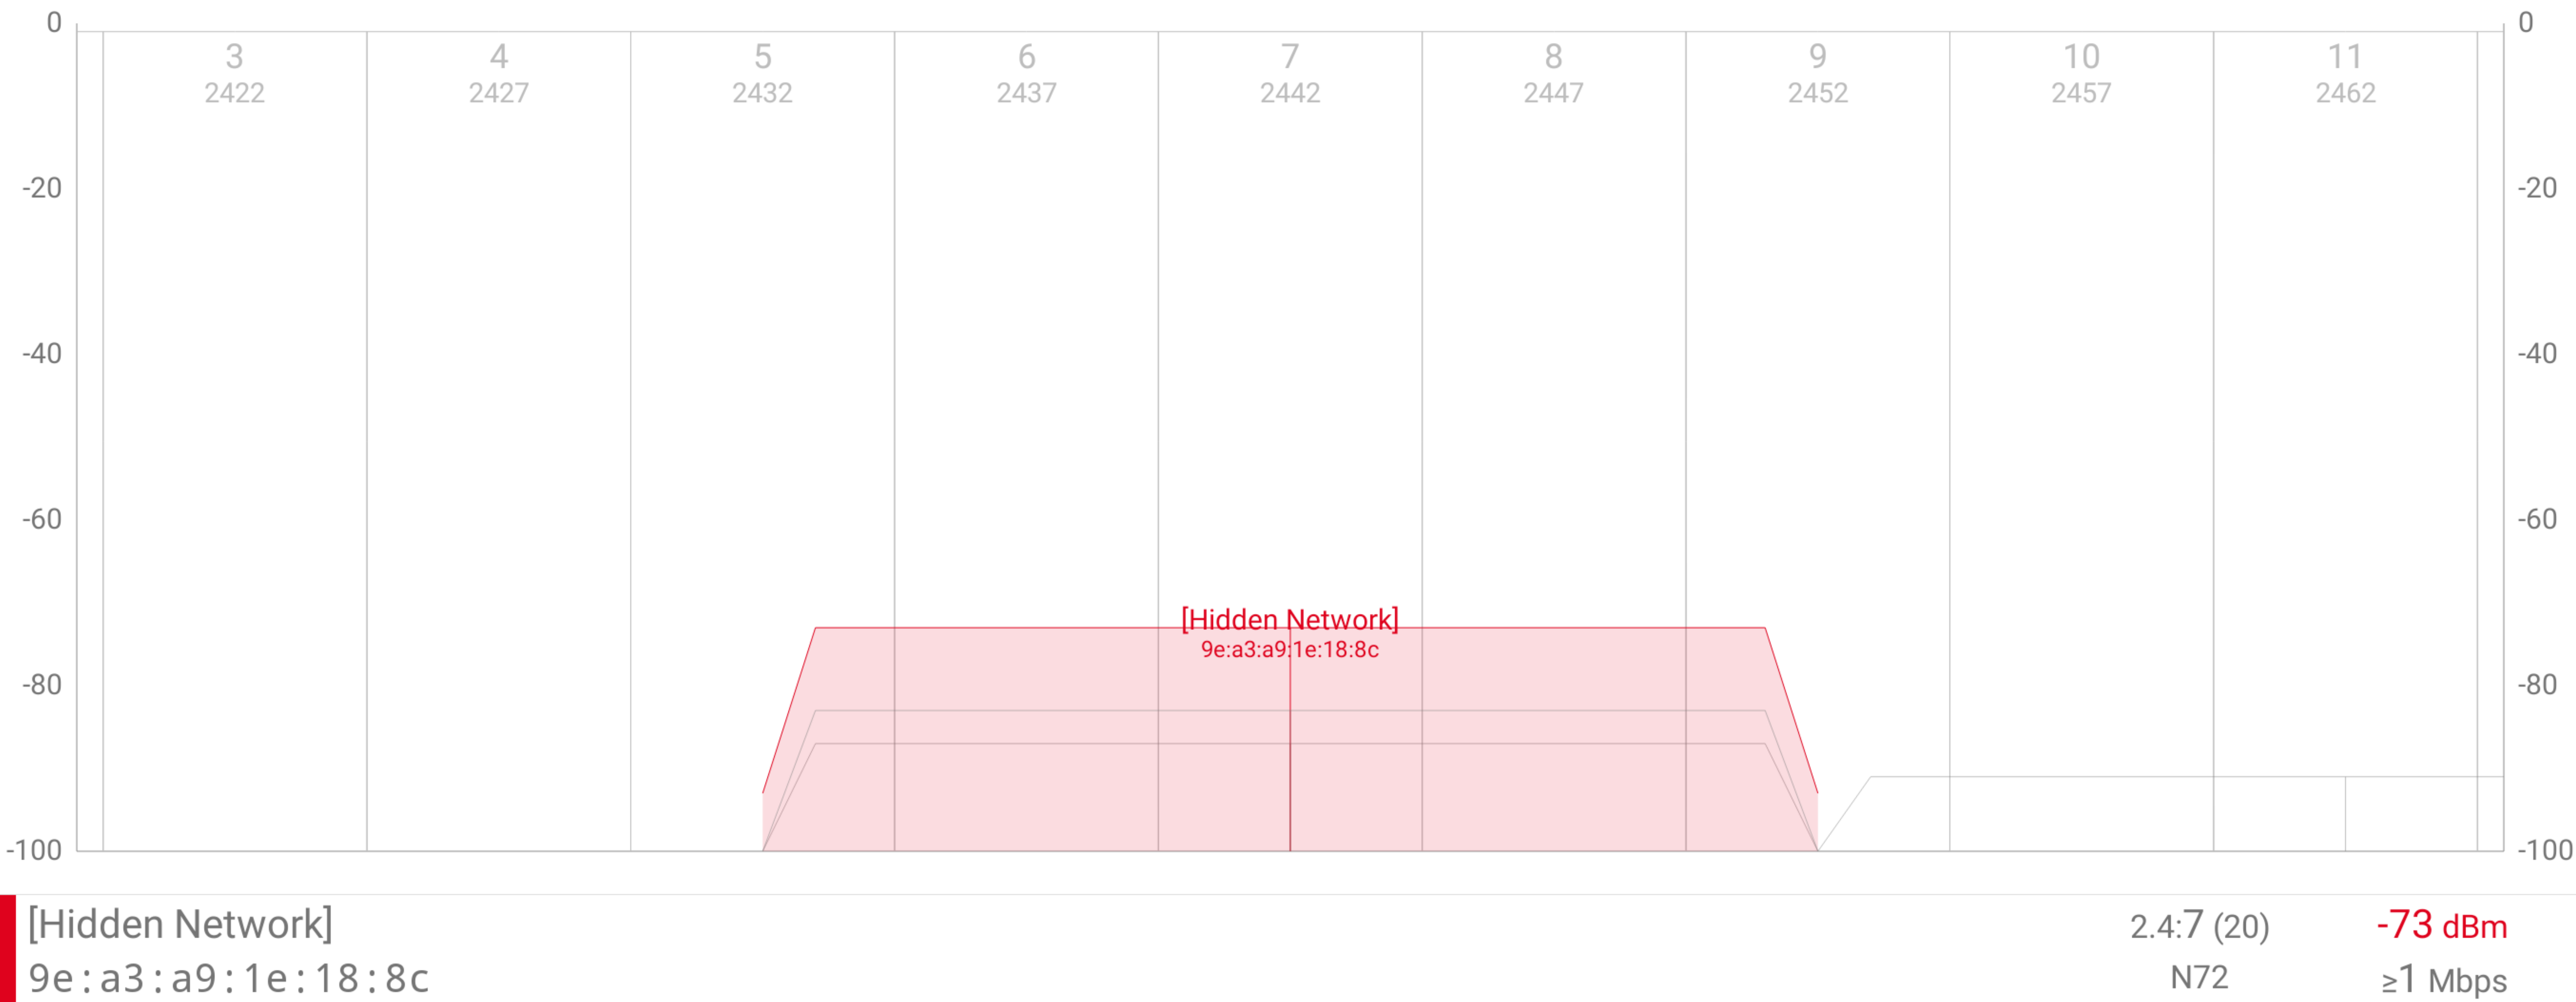

General Information for [Hidden Network]/9e:a3:a9:1e:18:8c

IDENTITIES	
SSID	[Hidden Network]
BSSID	9e:a3:a9:1e:18:8c
Manufacturer OUI	<Locally Administered BSSID>
SECURITY	
Type	WPA2-Personal
Capabilities	[RSN-PSK-CCMP][ESS]
RF / SPECTRUM	
Beacon	frequency 2,442 GHz channel 7
All channels used	5, 6, 7, 8, 9
Channel width (current)	20 MHz
Channel width (max)	20 MHz
PHY CAPABILITIES	
Supported technologies	N72, g54 , b11
Basic rates	1, 2, 5.5 , 11 Mbps
Additional rates	6, 9, 12, 18, 24, 36, 48 , 54 Mbps
Supported HT MCS	0-7

Operational Information for [Hidden Network]/9e:a3:a9:1e:18:8c


SIGNAL STRENGTH	
TX power	-74 dBm
RSSI	-73 dBm
LOAD	

MLO Information for [Hidden Network]/9e:a3:a9:1e:18:8c

MLO	Not applicable for this signal's technology
-----	---

Networking Information for [Hidden Network]/9e:a3:a9:1e:18:8c

Not associated with this signal.

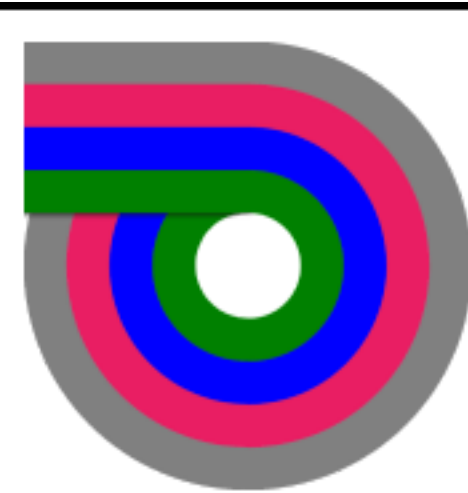

Phy models for [Hidden Network]/9e:a3:a9:1e:18:8c

WiFi Phy Rx Speed Model (Access Point to Device)

Signal not modelled yet.
The model will automatically start building upon connection to this signal.

WiFi Phy Tx Speed Model (Device to Access Point)

Signal not modelled yet.
The model will automatically start building upon connection to this signal.

