No active filter

dom_24 TP-Link_:29:35:0e	[RSN-PSK-CCMP][ESS][WPS]	v		2.4:4(40) N300	-42 dBm 150/150
[Hidden Network] c6:06:c3:29:35:0f	[RSN-PSK-CCMP][ESS]	v		5:36(80) AC867	-46 dBm ≥6 Mbps
UPC4056381 D-LinkIn_9f:59:a4	[RSN-PSK+FT/PSK-CCMP][ESS]	r v	10.6 % 0 STAs	2.4:6(20) N144	-57 dBm ≥1 Mbps
NETIASPOT-2.4GHz-AF7D19 Advanced_af:7d:1c	[RSN-PSK-CCMP][ESS][WPS]	v	11.4 % 1 STA	2.4:1(20) N144	-65 dBm ≥1 Mbps
DIR-825-20 D-LinkIn_d6:ee:a3	[RSN-PSK-CCMP][ESS]			2.4:1(40) N300	-68 dBm ≥1 Mbps
NETIASPOT-5GHz-AF7D19 Advanced_af:7d:20	[RSN-PSK-CCMP][ESS][WPS]		1.6 % 0 STAs	5:100(80) AC1300	-76 dBm ≥6 Mbps
NETIASPOT-2.4GHz-M72u huaweite_35:98:5c	[RSN-PSK-CCMP][ESS][WPS]	v	4.7 % 1 STA	2.4:7(20) N144	-78 dBm ≥1 Mbps
UPC4056381 RalinkTe_c5:8e:ae	[RSN-PSK-CCMP][ESS][WPS]	v	29.8 % 2 STAs	2.4:6(20) N144	-85 dBm ≥1 Mbps
AB-0F76 D-LinkIn_b1:0f:77	[RSN-PSK-CCMP][ESS]	k v	0.0 % 0 STAs	2.4:1(40) N270	-88 dBm ≥1 Mbps
DIR-825-5G-20 D-LinkIn_d6:ee:a1	[RSN-PSK-CCMP][ESS]			5:44(80) AC867	-89 dBm ≥6 Mbps

RSSI history (all filtered signals)

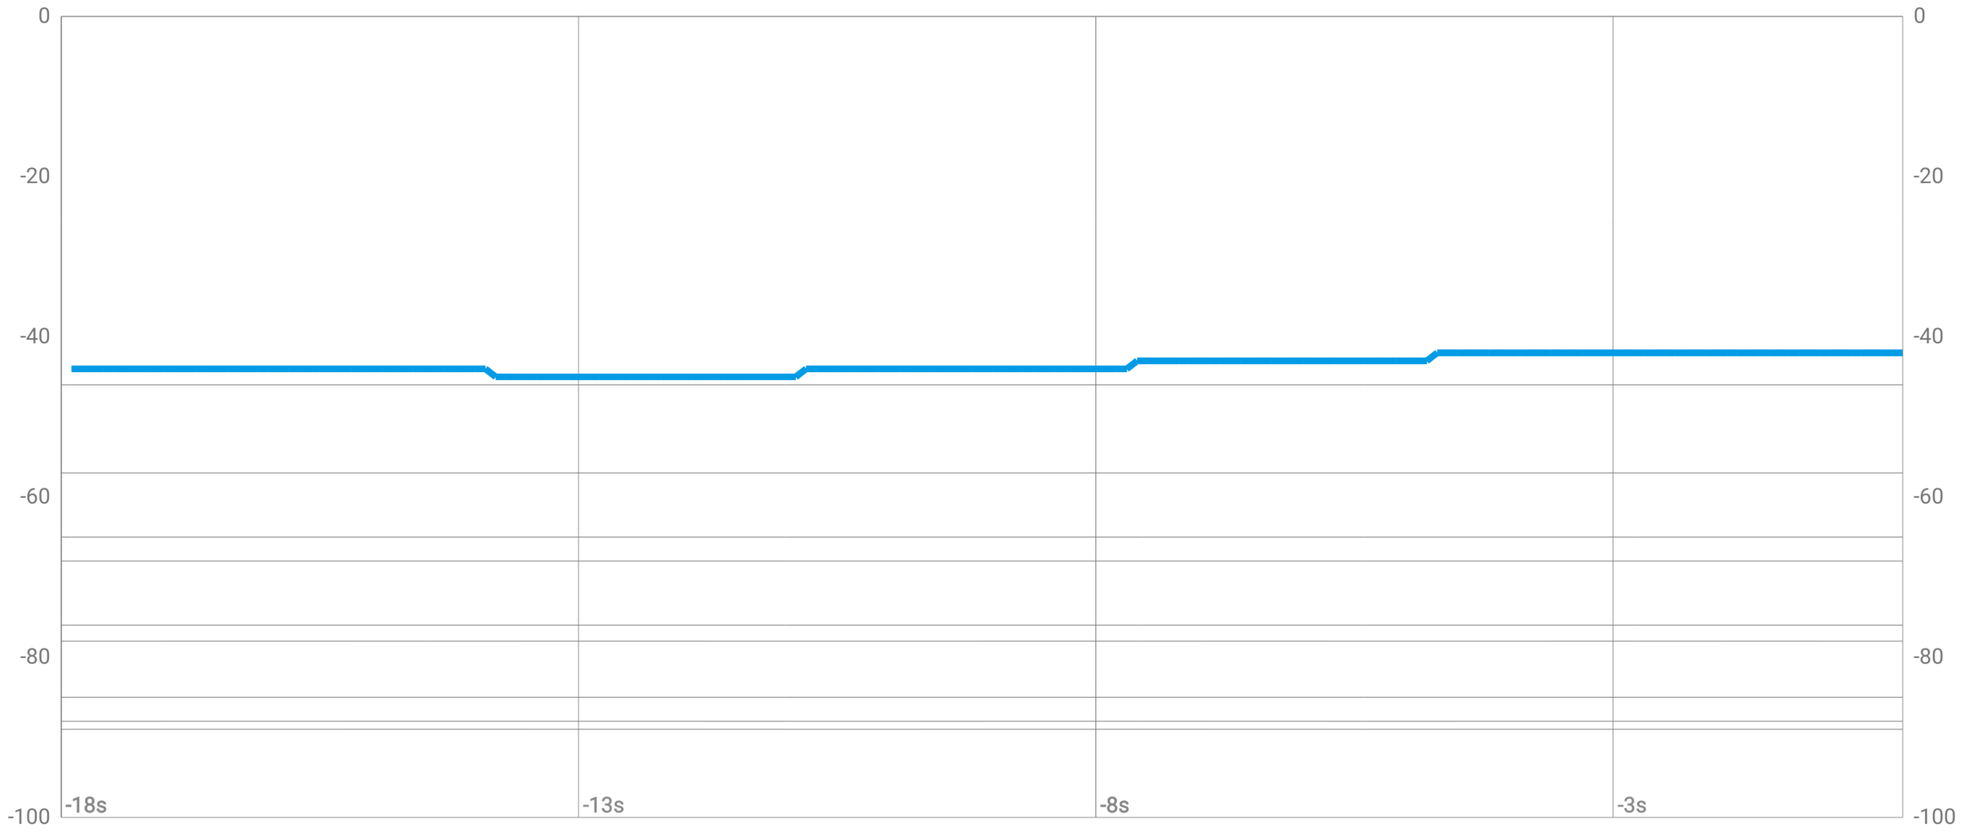

Signals overlapping with dom_24/TP-Link_:29:35:0e

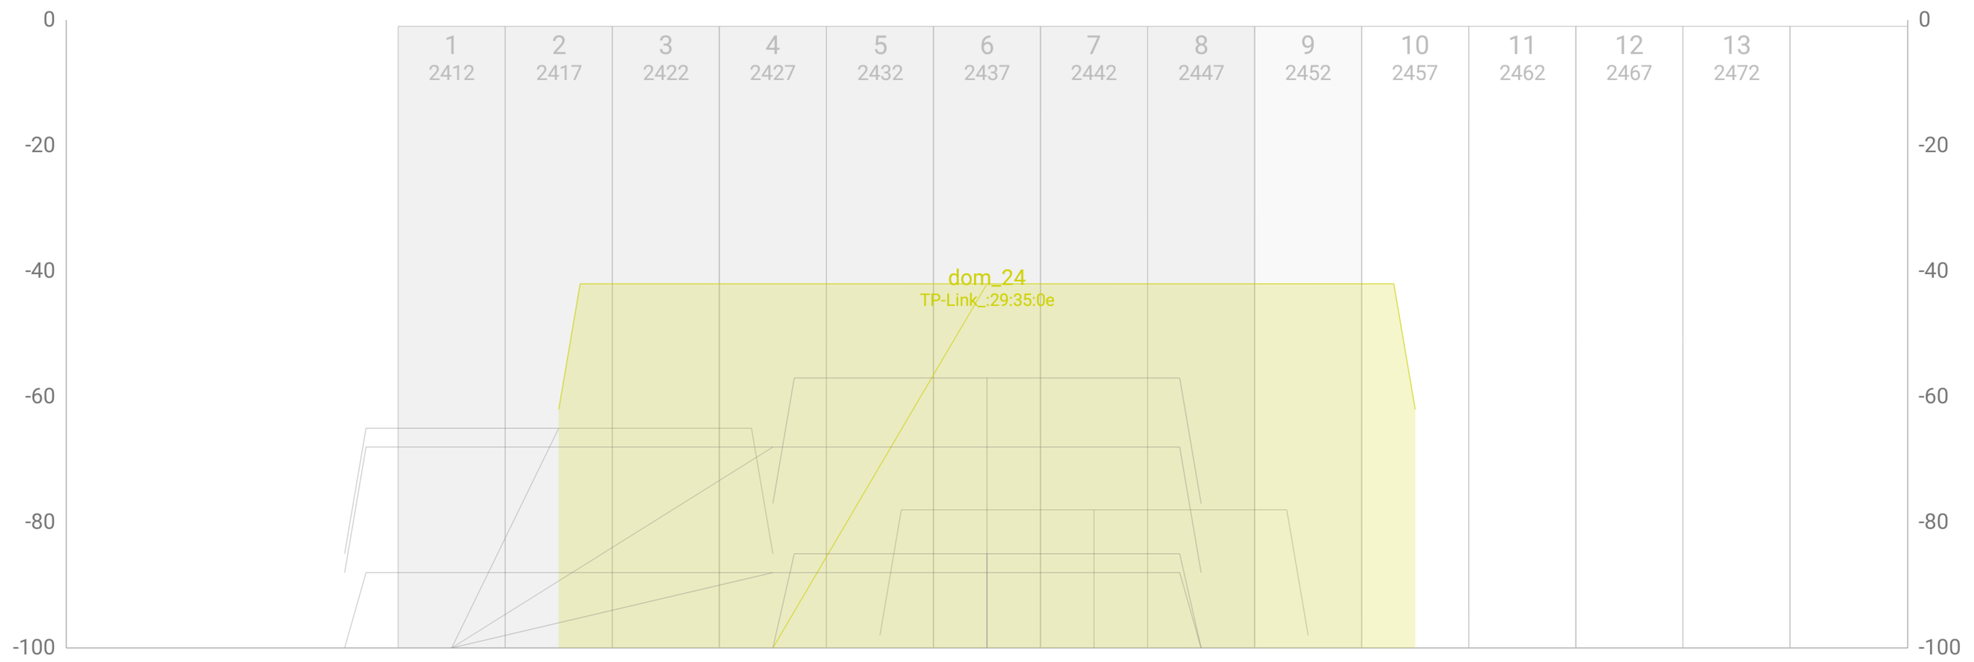

dom_24 TP-Link_:29:35:0e		2.4:4 (40) N300	-42 dBm ≥1 Mbps
UPC4056381 D-LinkIn_9f:59:a4	10.6 %	2.4:6 (20) N144	-57 dBm ≥1 Mbps
NETIASPOT-2.4GHz-AF7D19 Advanced_af:7d:1c	11.4 % 1 sta	2.4:1 (20) N144	-65 dBm ≥1 Mbps
DIR-825-20 D-LinkIn_d6:ee:a3		2.4:1 (40) N300	-68 dBm ≥1 Mbps
NETIASPOT-2.4GHz-M72u huaweite_35:98:5c	4.7 % 1 sta	2.4:7 (20) N144	-78 dBm ≥1 Mbps

General Information for dom_24/TP-Link_:29:35:0e

IDENTITIES	
SSID	dom_24
BSSID	c0:06:c3:29:35:0e
Manufacturer OUI	C0-06-C3
Manufacturer	TP-Link
SECURITY	
Type	WPA2-Personal
Capabilities	[RSN-PSK-CCMP][ESS][WPS]
RF / SPECTRUM	
Beacon	frequency 2,427 GHz channel 4
All channels used	2, 3, 4, 5, 6, 7, 8, 9, 10
Channel width (current)	40 MHz
Channel width (max)	40 MHz
PHY CAPABILITIES	
Supported technologies	N300, g54 , b11
Basic rates	1, 2, 5.5 , 11 Mbps
Additional rates	6, 9, 12, 18, 24, 36, 48 , 54 Mbps
Supported HT MCS	0-15
SU-MIMO	2x2
ADDITIONAL CAPABILITIES	
BSS Transition (BTM 802.11v)	Supported
Fast BSS Transition (FT 802.11r)	Not supported
Radio Management (RM 802.11k)	Supported
Management Frame Protection (MFP 802.11w)	Not supported
Fine Timing Measurement (FTM 802.11mc)	Not supported
Multi-Link Operation (MLO 802.11be)	Not supported

Operational Information for dom_24/TP-Link_:29:35:0e

SIGNAL STRENGTH	
TX power	-43 dBm
RSSI	-42 dBm
PHY SPEEDS	
Phy Speed Rx ▼ (AP ➔ Device)	now 150.0 Mbps OFDM mcs HT/7 modulation 64 QAM coding 5/6 nss 1 channel width 40 gi 0.4 moto g(50) capability 150.0 Mbps
Phy Speed Tx ▲ (Device ➔ AP)	now 150.0 Mbps OFDM mcs HT/7 modulation 64 QAM coding 5/6 nss 1 channel width 40 gi 0.4 moto g(50) capability 150.0 Mbps
LOAD	
Airtime utilization (channel; now)	11%
Airtime utilization (channel; MA10)	11%
Associated client stations (channel; now)	0
Associated client stations (channel; MA10)	0

MLO Information for dom_24/TP-Link_:29:35:0e

MLO	Not applicable for this signal's technology

Networking Information for dom_24/TP-Link_:29:35:0e

ADDRESSES

Link address	fe80::58e2:acff:fe98:c45a/64
Link address	192.168.68.100/24
Public address	79.124.107.1
ISP	AS44124 Rybnet Sp. z o.o. Sp. k./PL🇵🇱

SERVERS

DHCP Server	192.168.68.1
DNS Server	78.31.136.10
DNS Server	79.124.106.1

ROUTES

Destination specific	fe80::/64 ➔ ::
Default	::/0 ➔ fe80::c206:c3ff:fe29:350c
Destination specific	192.168.68.0/24 ➔ 0.0.0.0
Default	0.0.0.0/0 ➔ 192.168.68.1

Phy models for dom_24/TP-Link_:29:35:0e

WiFi Phy Rx Speed Model (Access Point to Device)

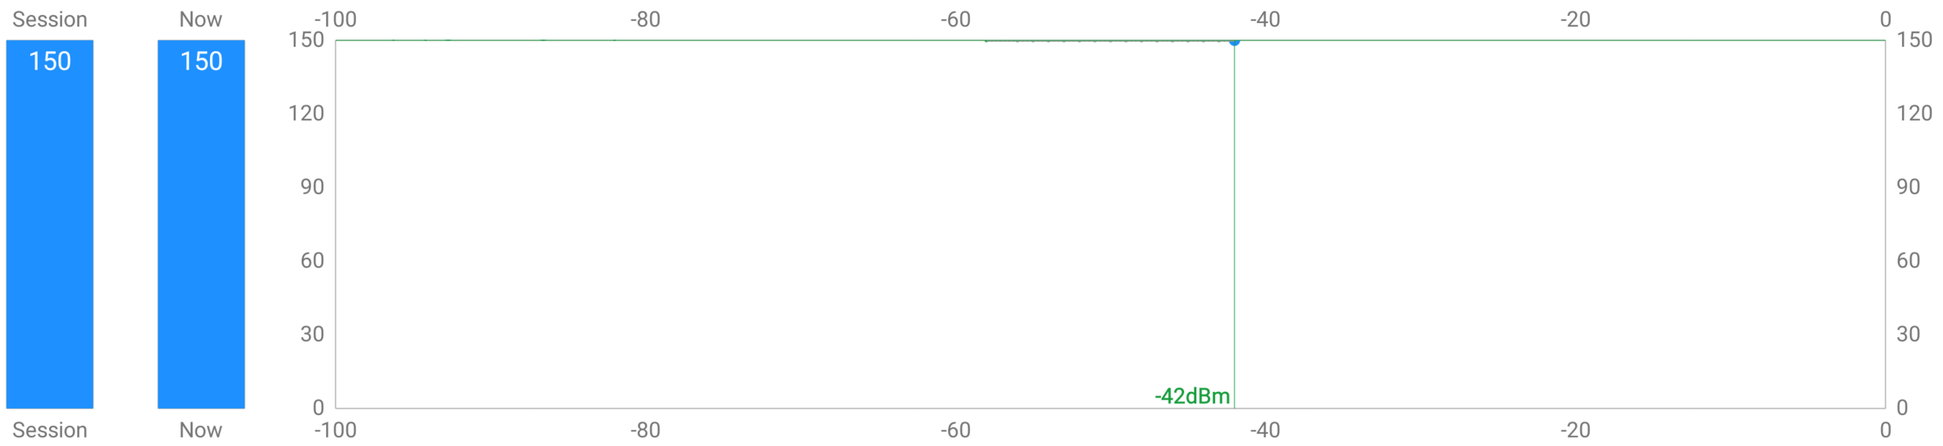

Phy rx speed losses (averages for this session)

- ▸ due to signal strength 0 Mbps (0%)
- ▸ due to signal quality 0 Mbps (0%)

This model shows the range of WiFi rx phy speed measured when using this signal with this device based on received signal strength (rssi).
Dimmed points represent less than 1% of all samples.

WiFi Phy Tx Speed Model (Device to Access Point)

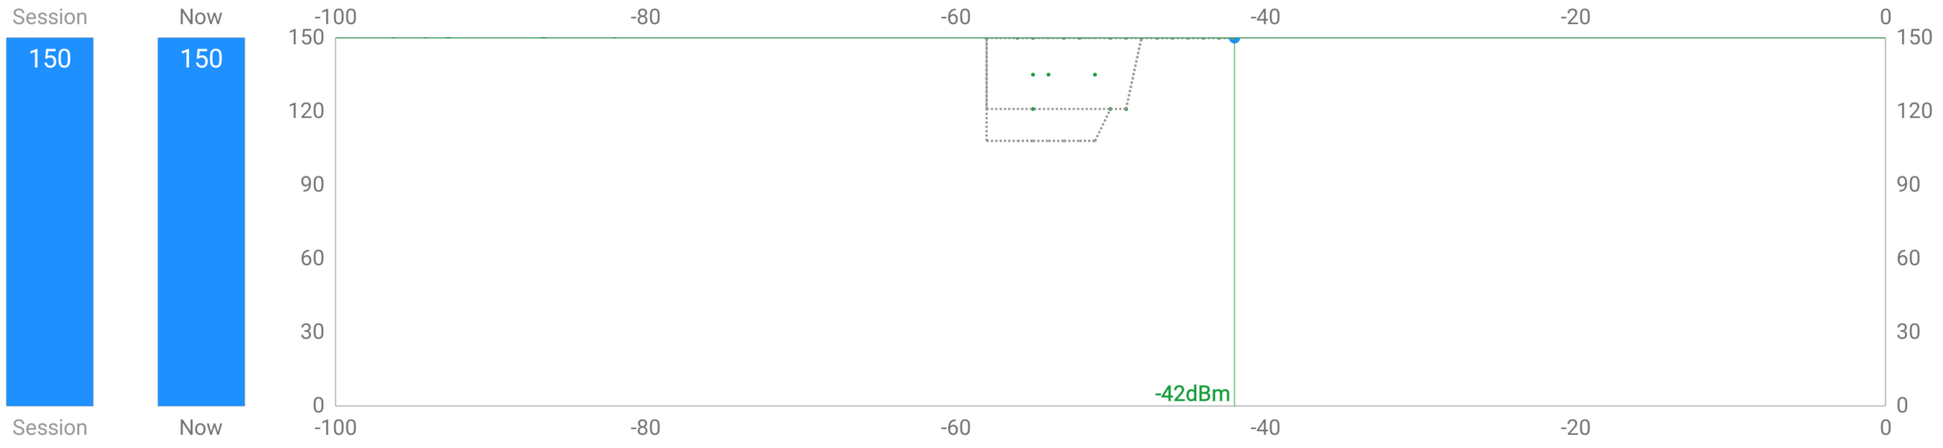

Phy speed losses (averages for this session)

- ▸ due to signal strength 0 Mbps (0%)
- ▸ due to signal quality 0 Mbps (0%)

This model shows the range of WiFi tx phy speed measured when using this signal with this device based on received signal strength (rssi).
Dimmed points represent less than 1% of all samples.

Embedded attachements (use Adobe Acrobat to extract):

- analiti_latest_scan_results_for_filtered_bssids_b06f2451-985a-71e2-0000-0190f4fb7eb0_1727269338276.pcapng