


<div><div>!</div><div>Data Connection</div></div> <div>Unexpected connection type</div> <div>Connection type Device interface</div>	<div>MOBILE</div> <div>MOBILE rmnet_data1</div>
<div><div>✗</div><div>WiFi Network</div></div> <div>Unexpected data connection</div> <div></div>	<div>MOBILE</div>
<div><div>✗</div><div>WiFi Spectrum</div></div> <div>Unexpected data connection</div> <div></div>	<div>MOBILE</div>
<div><div>✗</div><div>WiFi Signal Quality</div></div> <div>Unexpected data connection</div> <div></div>	<div>MOBILE</div>
<div><div>✓</div><div>IP Connection</div></div> <div>Device IP</div> <div>DHCP Server Device IP Default IP Gateway ALL ROUTES Default Destination specific</div>	<div>100.125.51.148</div> <div>N/A 100.125.51.148 100.125.51.149 0.0.0.0/0 → 100.125.51.149 100.125.51.144/29 → 0.0.0.0</div>
<div><div>!</div><div>Ping RTT (gateway)</div></div> <div>No response</div> <div>Target Sent Received Success Loss Min 5th Percentile 25th Percentile Mean (Average) Median 75th Percentile 95th Percentile Max Jitter</div>	<div>100%</div> <div>100.125.51.149:ECHO 10 0 0% 100% 0 ms 0 ms 0 ms 0.0 ms 0 ms 0 ms 0 ms 0 ms 0 ms</div> <div><div>100% 80% 60% 40% 20%</div><div></div></div>

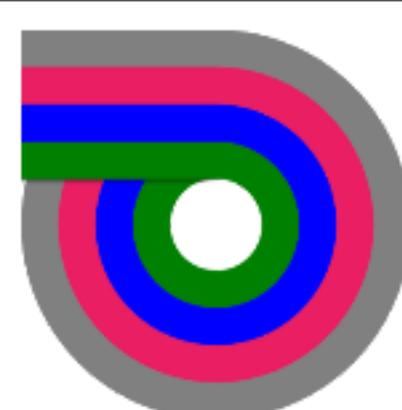

!

DNS Name Query RTT (dhcp)

Min/median/jitter

40/64/25 ms

Target

Requests

Responses

Success

Loss

Min

5th Percentile

25th Percentile

Median

Mean (Average)

75th Percentile

95th Percentile

Max

Jitter

185.89.185.2:DNS

10

10

100%

0%

40 ms

40 ms

40 ms

64 ms

67.0 ms

74 ms

87 ms

123 ms

25 ms

The graph displays the cumulative distribution of DNS Name Query RTT (dhcp) times. The x-axis represents time in milliseconds (0ms to 120ms), and the y-axis represents the percentage of successful queries (0% to 100%). A line graph shows the cumulative distribution, starting at approximately 30% at 40ms and reaching 100% at 120ms. Red vertical bars indicate the percentage of lost queries at various time intervals.

Time (ms)	Cumulative Success (%)	Loss (%)
40	30	20
50	40	10
60	50	10
70	60	10
80	80	20
90	90	10
100	95	5
110	98	2
120	100	2

✓

Internet Connection

Public IP

ISP

Public IP

ISP

DNS Servers

5.173.112.150

AS39603 P4 Sp. z o.o./PL

5.173.112.150

AS39603 P4 Sp. z o.o./PL

89.108.202.20, 185.89.185.2

⚠

TCP Connection Setup RTT (www.google.com:443)

Loss

Min/median/jitter

20%

54/69/40 ms

Target

Attempts

Connections

Success

Loss

Min

5th Percentile

25th Percentile

Median

Mean (Average)

75th Percentile

95th Percentile

Max

Jitter

www.google.com:HTTPS

10

8

80%

20%

54 ms

54 ms

67 ms

69 ms

94.4 ms

81 ms

82 ms

262 ms

40 ms

The graph displays the cumulative distribution of TCP Connection Setup RTT (www.google.com:443) times. The x-axis represents time in milliseconds (0ms to 240ms), and the y-axis represents the percentage of successful connections (0% to 100%). A line graph shows the cumulative distribution, starting at approximately 10% at 60ms and reaching 100% at 240ms. Orange vertical bars indicate the percentage of lost connections at various time intervals.

Time (ms)	Cumulative Success (%)	Loss (%)
60	10	10
70	20	10
80	30	10
90	40	10
100	50	10
110	60	10
120	70	10
130	75	5
140	78	3
150	80	2
160	82	2
170	84	2
180	86	2
190	88	2
200	90	2
210	92	2
220	94	2
230	96	2
240	98	2



