analiti WiFi Networks & Signals

No active filter

dom_24 TP-Link_:29:35:0f	[RSN-PSK-CCMP][ESS] [WPS]	v		5:48(80) AC867	-39 dBm 433/433
[Hidden Network] c6:06:c3:29:35:0f	[RSN-PSK-CCMP][ESS]	v		5:48(80) AC867	-36 dBm ≥6 Mbps
dom_24 TP-Link_:29:35:0e	[RSN-PSK-CCMP][ESS] [WPS]	v		2.4:10(40) N300	-52 dBm ≥1 Mbps
DIR-825-20 D-LinkIn_d6:ee:a3	[RSN-PSK-CCMP][ESS]			2.4:1(40) N300	-66 dBm ≥1 Mbps
UPC4056381 D-LinkIn_9f:59:a4	[RSN-PSK+FT/PSK-CCMP] [ESS]	r v	11.8 % 0 STAs	2.4:1(20) N144	-67 dBm ≥1 Mbps
https://RYCHoo.TheUnixPlay.com/ HUAWEI_c:f3:67:c4	[RSN-PSK-CCMP][ESS] [WPS]		0.0 % 0 STAs	2.4:7(20) N144	-68 dBm ≥1 Mbps
NETIASPOT-2.4GHz-AF7D19 Advanced_af:7d:1c	[RSN-PSK-CCMP][ESS] [WPS]	v	20.0 % 2 STAs	2.4:1(20) N144	-69 dBm ≥1 Mbps
NETIASPOT-2.4GHz-M72u huaweite_35:98:5c	[RSN-PSK-CCMP][ESS] [WPS]	v	6.7 % 1 STA	2.4:7(20) N144	-79 dBm ≥1 Mbps
UPC4056381_5G CompalBr_c5:8e:9b	[RSN-PSK-CCMP][ESS] [WPS]	k v		5:40(80) AC1300	-82 dBm ≥6 Mbps
NETIASPOT-5GHz-AF7D19 Advanced_af:7d:20	[RSN-PSK-CCMP][ESS] [WPS]		1.6 % 0 STAs	5:100(80) AC1300	-83 dBm ≥6 Mbps
DIR-825-5G-20 D-LinkIn_d6:ee:a1	[RSN-PSK-CCMP][ESS]			5:44(80) AC867	-88 dBm ≥6 Mbps
AB-0F76 D-LinkIn_b1:0f:77	[RSN-PSK-CCMP][ESS]	v	0.0 % 1 STA	2.4:1(40) N270	-89 dBm ≥1 Mbps

RSSI history (all filtered signals)

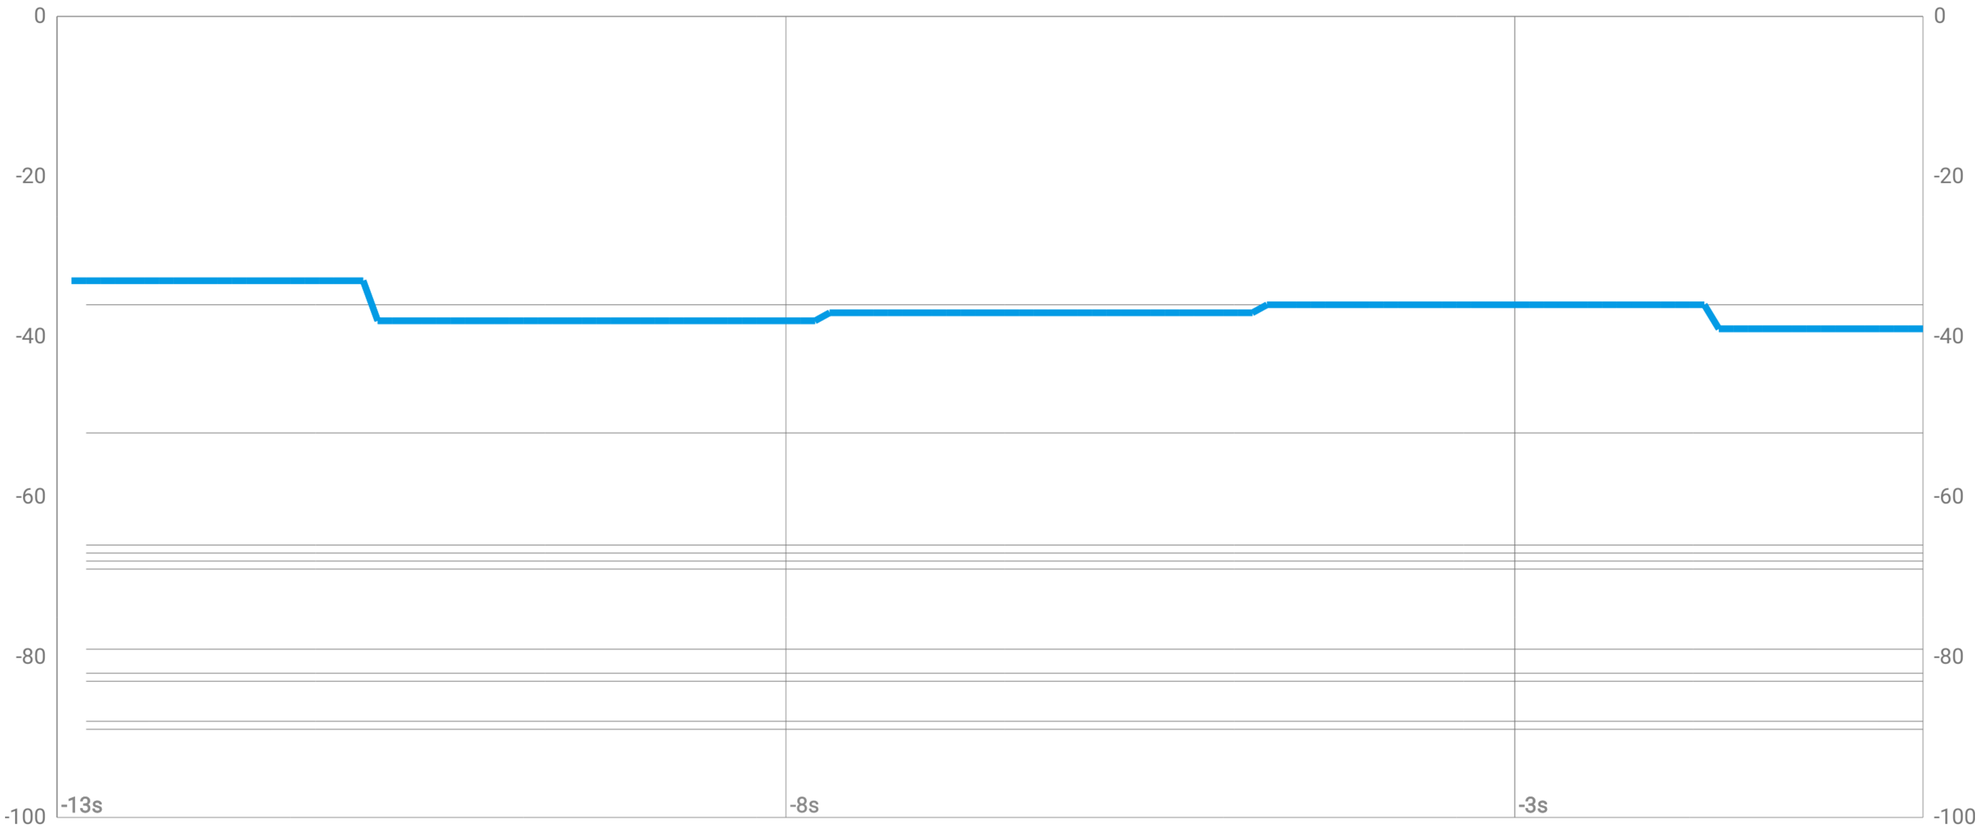

Signals overlapping with dom_24/TP-Link_:29:35:0f

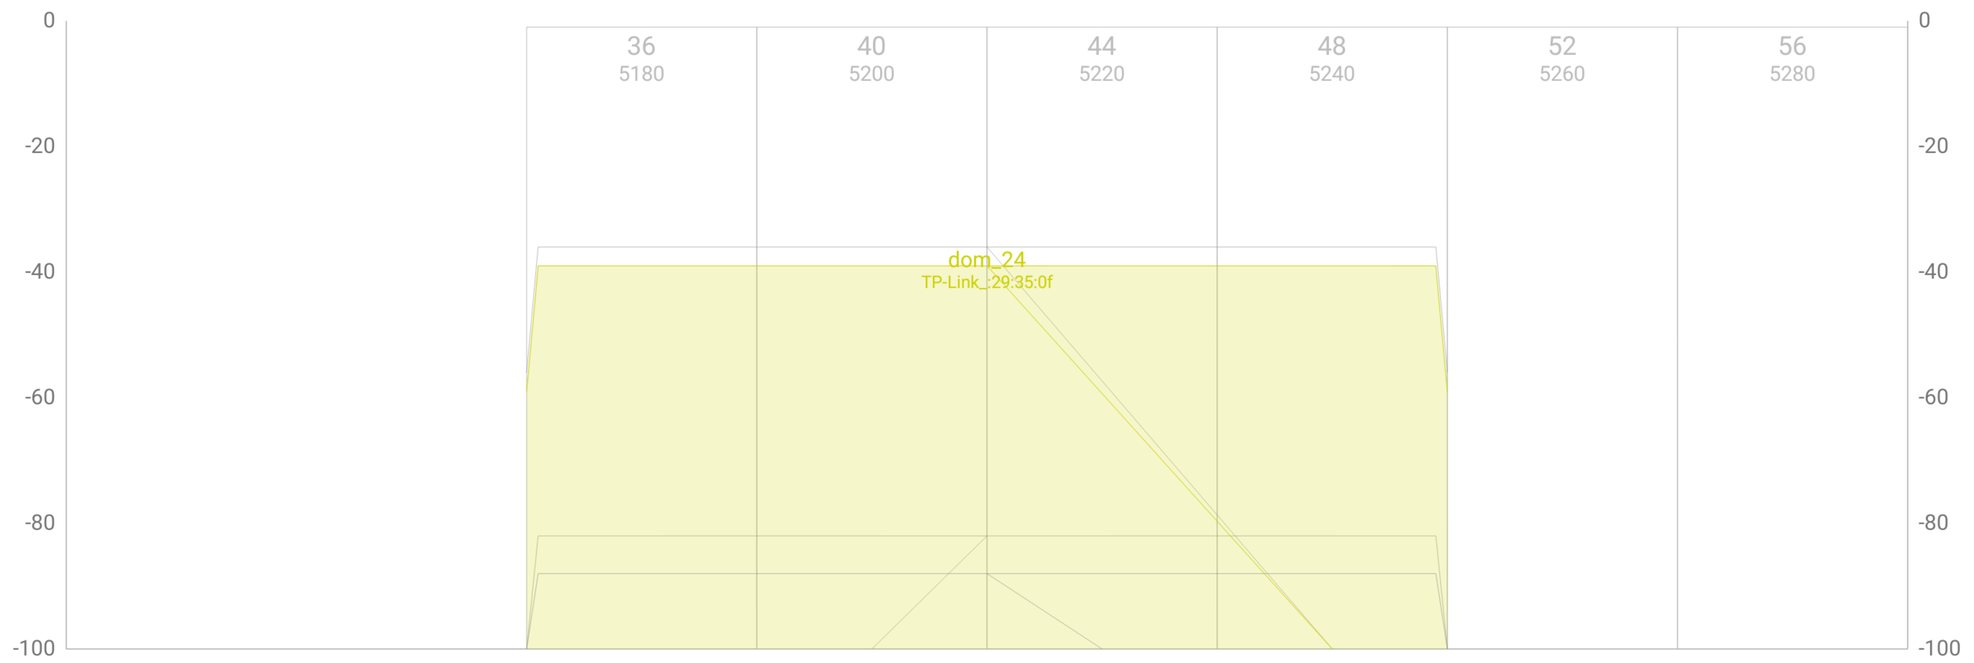

[Hidden Network] c6:06:c3:29:35:0f	5:48 (80) AC867	-36 dBm ≥6 Mbps
dom_24 TP-Link_:29:35:0f	5:48 (80) AC867	-39 dBm ≥6 Mbps
UPC4056381_5G CompalBr_c5:8e:9b	5:40 (80) AC1300	-82 dBm ≥6 Mbps

General Information for dom_24/TP-Link_:29:35:0f

IDENTITIES

SSID	dom_24
BSSID	c0:06:c3:29:35:0f
Manufacturer OUI	C0-06-C3
Manufacturer	TP-Link

SECURITY

Type	WPA2-Personal
Capabilities	[RSN-PSK-CCMP][ESS][WPS]

RF / SPECTRUM

Beacon	frequency 5,240 GHz channel 48
All Channels Used	36, 40, 44, 48
Channel width (current)	80 MHz
Channel width (max)	80 MHz

PHY CAPABILITIES

Supported technologies	AC867, N300 , a54
Basic rates	6, 12 , 24 Mbps
Additional rates	9, 18, 36, 48 , 54 Mbps
Supported HT MCS	0-15
Supported VHT MCS	0-9
SU-MIMO	2x2
MU-MIMO	2x2

ADDITIONAL CAPABILITIES

BSS Transition (BTM 802.11v)	Supported
Fast BSS Transition (FT 802.11r)	Not supported
Radio Management (RM 802.11k)	Supported
Management Frame Protection (MFP 802.11w)	Not supported
Fine Timing Measurement (FTM 802.11mc)	Not supported
Multi-Link Operation (MLO 802.11be)	Not supported

Operational Information for dom_24/TP-Link_:29:35:0f

SIGNAL STRENGTH

TX power	-40 dBm
RSSI	-39 dBm

PHY SPEEDS

Phy Speed Rx ▼ (AP ➔ Device)	now 433.3 Mbps OFDM mcs VHT/9 modulation 256 QAM coding 5/6 nss 1 channel width 80 gi 0.4 Signal capability 866.7 Mbps moto g(50) capability 433.3 Mbps
Phy Speed Tx ▲ (Device ➔ AP)	now 433.3 Mbps OFDM mcs VHT/9 modulation 256 QAM coding 5/6 nss 1 channel width 80 gi 0.4 Signal capability 866.7 Mbps moto g(50) capability 433.3 Mbps

LOAD

MLO Information for dom_24/TP-Link_:29:35:0f

MLO	Not applicable for this signal's technology

Networking Information for dom_24/TP-Link_:29:35:0f

ADDRESSES	
Link address	192.168.68.101/24
Link address	fe80::58e2:acff:fe98:c45a/64
Public address	79.124.107.1
ISP	AS44124 Rybnet Sp. z o.o. Sp. k./PL🇵🇱

SERVERS	
DHCP Server	192.168.68.1
DNS Server	78.31.136.10
DNS Server	79.124.106.1

ROUTES	
Destination specific	fe80::/64 ➔ ::
Default	::/0 ➔ fe80::c206:c3ff:fe29:350c
Destination specific	192.168.68.0/24 ➔ 0.0.0.0
Default	0.0.0.0/0 ➔ 192.168.68.1

Phy models for dom_24/TP-Link_:29:35:0f

WiFi Phy Rx Speed Model (Access Point to Device)

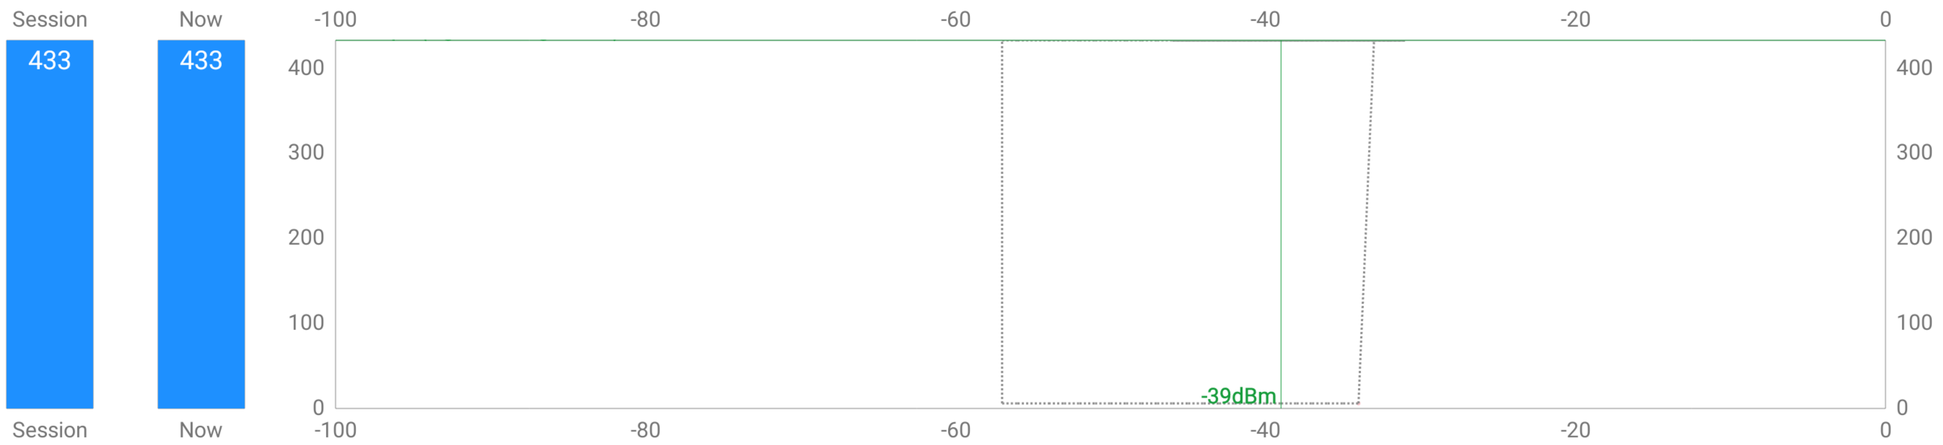

Phy rx speed losses (averages for this session)

- ▸ due to signal strength 0 Mbps (0%)
- ▸ due to signal quality 0 Mbps (0%)

This model shows the range of WiFi rx phy speed measured when using this signal with this device based on received signal strength (rssi).
Dimmed points represent less than 1% of all samples.

WiFi Phy Tx Speed Model (Device to Access Point)

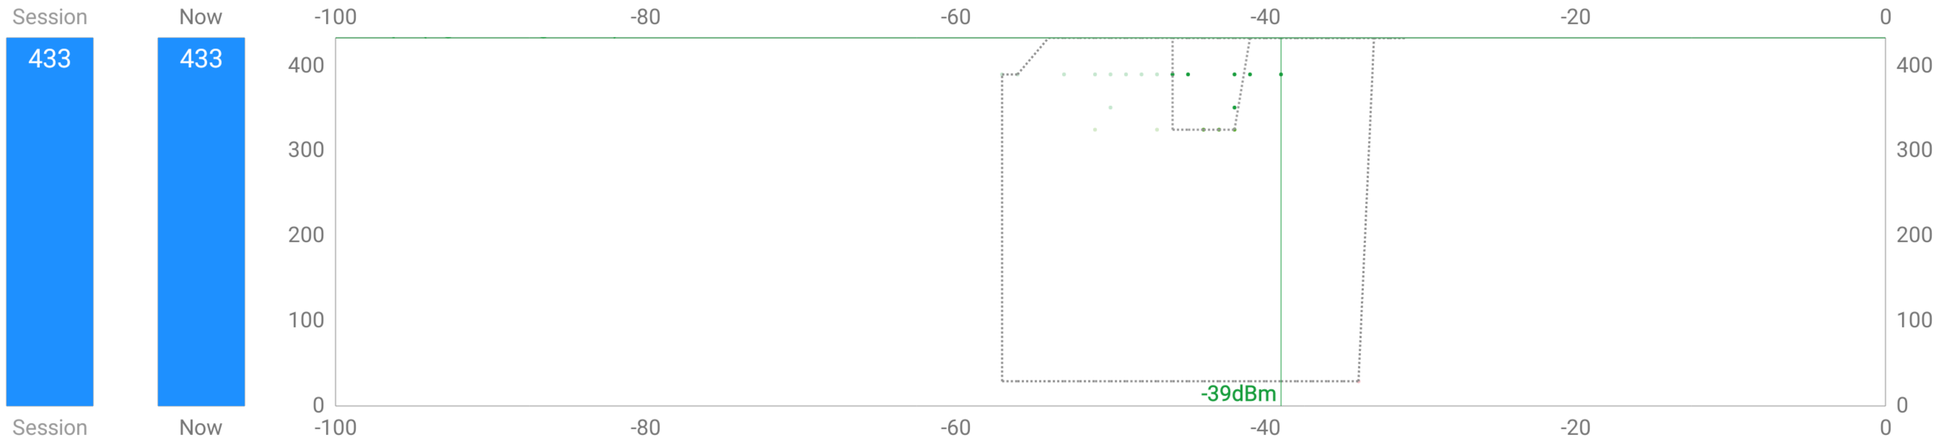

Phy speed losses (averages for this session)

- ▸ due to signal strength 0 Mbps (0%)
- ▸ due to signal quality 0 Mbps (0%)

This model shows the range of WiFi tx phy speed measured when using this signal with this device based on received signal strength (rssi).
Dimmed points represent less than 1% of all samples.