

Xenterra 8TX unmanaged Switch 8 Port 100Mbit

Art.No.: 58902
Weight: 0.255
Country of origin: DE
Model designation: Xenterra 8TX


8 port unmanaged switch
DIN-rail mountable TH35 (EN 60715)
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

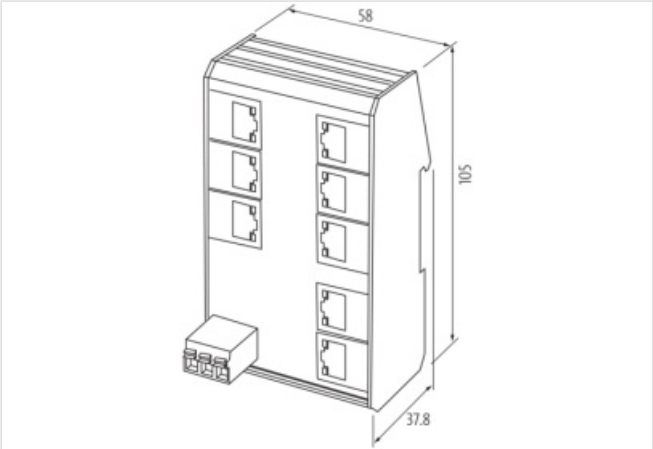

Commercial data

URL Webshop	https://shop.murrelektronik.com/58902
GTIN	4048879830294
ECLASS-6.0	19170106
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170402
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-5.0	EC000734
ETIM-6.0	EC000734
ETIM-7.0	EC000734

ETIM-8.0	EC000734
EAN	4048879830294
Electrical data Supply	
Operating voltage AC min.	8 V
Operating voltage AC max.	28 V
Operating voltage DC min.	9 V
Operating voltage DC max.	36 V
Industrial communication	
Data transmission rate max.	100 MBit/s
Industrial communication Ethernet functionality	
VLAN unmanaged (IEEE 802.1Q)	yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	yes
Auto-crossover	yes
Diagnostics	
Alarm contact	no
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP20
Mechanical data Material data	
Material housing	Metal
Color housing	black
Mechanical data Mounting data	
Height	105 mm
Width	58 mm
Depth	37.8 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C
Connection type 1	
Connection type 1	8
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.